

## **BID ADDENDUM NO. 5**

July 22, 2026  
Alfred Almond CSD  
2025 Capital Project  
2028-059

SED #02-01-01-04-0-001-037 – K-12 Main Campus Building

The following Addendum items shall be considered a part of the contract documents prepared by HUNT ENGINEERS, ARCHITECTS, LAND SURVEYORS & LANDSCAPE ARCHITECT, DPC. Bid Document date of April 7, 2026, issued for bid June 3, 2026.

**Clarifications issued by this Addendum:**

None

**Project Manual Sections issued by this Addendum:**

01 32 16 – Milestone Schedule Attachment  
09 27 00 – Wall Coverings

**Drawings issued by this Addendum:**

MC-A9.1 – INTERIOR FINISH SCHEDULES  
MC-H0.2 – FIRST FLOOR DEMOLITION PLAN – AREA D  
MC-H1.2 – FIRST FLOOR NEW WORK PLAN – AREA D  
MC-H3.1 – SCHEDULES & DETAILS  
AD5-A1 – PARTIAL FIRST FLOOR REFLECTED CEILING PLAN @ CORRIDOR H101  
AD5-L1 - ASPHALT PAVEMENT REPLACEMENT  
AD5-E1 – SITE ELECTRICAL PLAN  
AD5-E2 - PANEL HS-LP-2  
AD5-E3 - POOL BASEMENT POWER PLAN

**Revisions to Project Manual issued by this Addendum:**

**ITEM AD5-1 Refer to 01 23 00 – Alternates**

**AMEND** Paragraph 1.4, A to read as follows: “Provide all work associated with the removal of the existing slate roof system and providing new synthetic slate roof system in lieu of base bid spot roof replacement as indicated by the contract documents.”

**ITEM AD5-2 Refer to 01 32 16 – Milestone Schedule Attachment**

**DELETE** Specification Section 01 32 16 – Milestone Schedule Attachment in its entirety.

**ITEM AD5-3 Refer to 01 32 16 – Milestone Schedule Attachment**

**ADD** Specification Section 01 32 16 – Milestone Schedule Attachment as issued by this addendum.

**ITEM AD5-4 Refer to 09 27 00 – Wall Coverings**

**DELETE** Specification Section 09 27 00 – Wall Coverings in its entirety.

**ITEM AD5-5 Refer to Section 09 27 00 – Wall Coverings**

**ADD** Specification Section 09 27 00 – Wall Coverings as issued by this by this addendum.

**ITEM AD5-6 Refer to Section 14 24 00 – Machine Room-Less Hydraulic Passenger Elevator**

**ADD** Paragraph 2.1, A, 5 to read: “Kaiser”

**ITEM AD5-7 Refer to Section 23 22 14 – Steam and Condensate Heating Specialties**

**ADD** Section 1.1, D to read as follows: “Ball Valves”

**ADD** Section 2.4 to read as follows:

**2.4 CARBON STEEL, BALL VALVES**

**A. Class 150, Full Port, Stainless Steel Trim, Flanged:**

**B. Comply with MSS SP-72.**

**C. WOG Rating: 125 psi.**

**D. WSP Rating: 150 psi.**

**E. Body: Carbon steel, ASTM A216/A216M, Type WCB.**

**F. Seats: PTFE.**

**G. Stem: Stainless steel.**

**H. Ball: Stainless steel, vented.**

**I. Size: 1/2 to 12 inches.**

**ITEM AD5-8 Refer to Section 32 18 33.39 – Synthetic Running Track Resurfacing**

**AMEND** Paragraph 2.3, C to read: “,,,Color: To be determined by Manufacture’s full line of Blue colors.”

**Revisions to Drawings issued by this Addendum:**

**ITEM AD5-9 Refer to MC-L1.2 – SITE DEMOLITION PLAN - NORTHWEST**

**AMEND** Detail #1 as per Detail #1 on AD5-L1 as issued by this addendum.

**ITEM AD5-10 Refer to MC-L2.2 – SITE IMPROVEMENT PLAN - NORTHWEST**

**AMEND** Detail #1 as per Detail #2 on AD5-L1 as issued by this addendum.

**ITEM AD5-11 Refer to MC-L4.1 – SITE DETAILS**

**ADD** Detail #3 per AD5-L1 as issued by this addendum.

**ITEM AD5-12 Refer to MC-A0.9 – ROOF DEMO PLAN – AREA A**

**AMEND** Demolition note #D1 to read as follows: “REMOVE DAMAGED SHINGLES AND DAMAGED COPPER FLASHING AROUND EXISTING SLATE/TERRACOTTA ROOF. ESTIMATED 40% OF TOTAL SLATE/TERRACOTTA ROOF NEEDS TO BE REMOVED. PREPARE AREA FOR NEW SLATE/TERRACOTTA AND FLASHING. (BASE BID)”

**ITEM AD5-13 Refer to MC-A0.9 – ROOF DEMO PLAN – AREA A**

**AMEND** Demolition note #D5 to read as follows: “SECTION OF ROOFING TO BE REMOVED DOWN TO STRUCTURE, INCLUDING BUT NOT LIMITED TO SLATE/TERRACOTTA TILES, COVERBOARD, INSULATION, UNDERLAYMENT BOARD AND VAPOR BARRIER. COORDINATE EXTENTS WITH NEW WORK. PREPARE FOR NEW ROOFING TIE-IN. (ALTERNATE #1)”

**ITEM AD5-14 Refer to MC-A0.10 – ROOF DEMO PLAN – AREA B**

**AMEND** Demolition note #D1 to read as follows: “REMOVE DAMAGED SHINGLES AND DAMAGED COPPER FLASHING AROUND EXISTING SLATE/TERRACOTTA ROOF. ESTIMATED 40% OF TOTAL SLATE/TERRACOTTA ROOF NEEDS TO BE REMOVED. PREPARE AREA FOR NEW SLATE/TERRACOTTA AND FLASHING. (BASE BID)”

**ITEM AD5-15 Refer to MC-A0.10 – ROOF DEMO PLAN – AREA B**

**AMEND** Demolition note #D5 to read as follows: “SECTION OF ROOFING TO BE REMOVED DOWN TO STRUCTURE, INCLUDING BUT NOT LIMITED TO SLATE/TERRACOTTA TILES, COVERBOARD, INSULATION, UNDERLAYMENT BOARD AND VAPOR BARRIER. COORDINATE EXTENTS WITH NEW WORK. PREPARE FOR NEW ROOFING TIE-IN. (ALTERNATE #1)”

**ITEM AD5-16 Refer to MC-A0.11 – ROOF DEMO PLAN – AREA D**

**AMEND** Demolition note #D1 to read as follows: “REMOVE DAMAGED SHINGLES AND DAMAGED COPPER FLASHING AROUND EXISTING SLATE/TERRACOTTA ROOF. ESTIMATED 40% OF TOTAL SLATE/TERRACOTTA ROOF NEEDS TO BE REMOVED. PREPARE AREA FOR NEW SLATE/TERRACOTTA AND FLASHING. (BASE BID)”

**ITEM AD5-17 Refer to MC-A0.11 – ROOF DEMO PLAN – AREA D**

**AMEND** Demolition note #D5 to read as follows: “SECTION OF ROOFING TO BE REMOVED DOWN TO STRUCTURE, INCLUDING BUT NOT LIMITED TO SLATE/TERRACOTTA TILES, COVERBOARD, INSULATION, UNDERLAYMENT BOARD AND VAPOR BARRIER. COORDINATE EXTENTS WITH NEW WORK. PREPARE FOR NEW ROOFING TIE-IN. (ALTERNATE #1)”

**ITEM AD5-18 Refer to MC-A0.12 – ROOF DEMO PLAN – AREA F**

**AMEND** Demolition note #D1 to read as follows: “REMOVE DAMAGED SHINGLES AND DAMAGED COPPER FLASHING AROUND EXISTING SLATE/TERRACOTTA ROOF. ESTIMATED 40% OF TOTAL SLATE/TERRACOTTA ROOF NEEDS TO BE REMOVED. PREPARE AREA FOR NEW SLATE/TERRACOTTA AND FLASHING. (BASE BID)”

**ITEM AD5-19 Refer to MC-A0.12 – ROOF DEMO PLAN – AREA F**

**AMEND** Demolition note #D5 to read as follows: “SECTION OF ROOFING TO BE REMOVED DOWN TO STRUCTURE, INCLUDING BUT NOT LIMITED TO SLATE/TERRACOTTA TILES, COVERBOARD, INSULATION, UNDERLAYMENT BOARD AND VAPOR BARRIER. COORDINATE EXTENTS WITH NEW WORK. PREPARE FOR NEW ROOFING TIE-IN. (ALTERNATE #1)”

**ITEM AD5-20 Refer to MC-A1.9 – ROOF PLAN – AREA A**

**AMEND** Roof Drawing note #1 to read as follows: “PROVIDE REPLACEMENT FOR DAMAGED SLATE/TERRACOTTA SHINGLES AND COPPER FLASHINGS AT BASE OF SLATE/TERRACOTTA ROOF. ESTIMATED 40% OF TOTAL SLATE/TERRACOTTA ROOF AREA NEEDS REPLACEMENT. REAL SLATE/TERRACOTTA TO BE USED AS REPLACEMENT. (BASE BID)”

**ITEM AD5-21 Refer to MC-A1.10 – ROOF PLAN – AREA B**

**AMEND** Roof Drawing note #1 to read as follows: “PROVIDE REPLACEMENT FOR DAMAGED SLATE/TERRACOTTA SHINGLES AND COPPER FLASHINGS AT BASE OF SLATE/TERRACOTTA ROOF. ESTIMATED 40% OF TOTAL SLATE/TERRACOTTA ROOF AREA NEEDS REPLACEMENT. REAL SLATE/TERRACOTTA TO BE USED AS REPLACEMENT. (BASE BID)”

**ITEM AD5-22 Refer to MC-A1.11 – ROOF PLAN – AREA D**

**AMEND** Roof Drawing note #1 to read as follows: “PROVIDE REPLACEMENT FOR DAMAGED SLATE/TERRACOTTA SHINGLES AND COPPER FLASHINGS AT BASE OF SLATE/TERRACOTTA ROOF. ESTIMATED 40% OF TOTAL SLATE/TERRACOTTA ROOF AREA NEEDS REPLACEMENT. REAL SLATE/TERRACOTTA TO BE USED AS REPLACEMENT. (BASE BID)”

**ITEM AD5-23 Refer to MC-A1.12 – ROOF PLAN – AREA F**

**AMEND** Roof Drawing note #1 to read as follows: “PROVIDE REPLACEMENT FOR DAMAGED SLATE/TERRACOTTA SHINGLES AND COPPER FLASHINGS AT BASE OF SLATE/TERRACOTTA ROOF. ESTIMATED 40% OF TOTAL SLATE/TERRACOTTA ROOF AREA NEEDS REPLACEMENT. REAL SLATE/TERRACOTTA TO BE USED AS REPLACEMENT. (BASE BID)”

**ITEM AD5-24 Refer to MC-A2.2 – FIRST FLOOR REFLECTED CEILING PLAN – AREA D**

**AMEND** Detail #1 as per Detail #1 on AD5-A1 as issued by this addendum.

**ITEM AD5-25 Refer to MC-A9.1 – INTERIOR FINISH SCHEDULES**

**DELETE** MC-A9.1 – INTERIOR FINISH SCHEDULES in its entirety.

**ITEM AD5-26 Refer to MC-A9.1 – INTERIOR FINISH SCHEDULES**

**ADD** MC-A9.1 – INTERIOR FINISH SCHEDULES issued by this addendum.

**ITEM AD5-27 Refer to MC-H0.2 – FIRST FLOOR DEMOLITION PLAN – AREA D**

**DELETE** MC-H0.2 – FIRST FLOOR DEMOLITION PLAN – AREA D in its entirety.

**ITEM AD5-28 Refer to MC-H0.2 – FIRST FLOOR DEMOLITION PLAN – AREA D**

**ADD** MC-H0.2 – FIRST FLOOR DEMOLITION PLAN – AREA D issued by this addendum.

**ITEM AD5-29 Refer to MC-H1.2 – FIRST FLOOR NEW WORK PLAN – AREA D**

**DELETE** MC-H1.2 – FIRST FLOOR NEW WORK PLAN – AREA D in its entirety.

**ITEM AD5-30 Refer to MC-H1.2 – FIRST FLOOR NEW WORK PLAN – AREA D**

**ADD** MC-H1.2 – FIRST FLOOR NEW WORK PLAN – AREAD issued by this addendum.

**ITEM AD5-31 Refer to MC-H3.1 – SCHEDULES & DETAILS**

**DELETE** MC-H3.1 – SCHEDULES & DETAILS in its entirety.

**ITEM AD5-32 Refer to MC-H3.1 – SCHEDULES & DETAILS**

**ADD** MC-H3.1 – SHEDULES & DETAILS issued by this addendum.

**ITEM AD5-33 Refer to MC-E1.1 - BASEMENT FLOOR POWER PLAN - AREA D**

**AMEND** Detail #2 with AD5-E3 - POOL BASEMENT POWER PLAN, issued by this addendum.

**ITEM AD5-34 Refer to MC-E1.2 - FIRST FLOOR POWER PLAN - AREA B**

**ADD** AD5-E1 - SITE ELECTRICAL PLAN, issued by this addendum to this sheet.

**ITEM AD5-35 Refer to MC-E3.2 - MECHANICAL EQUIPMENT AND CONNECTION SCHEDULE**

**AMEND** panel schedule HS-LP-2 with AD5-E2 - PANEL HS-LP-2, issued by this addendum.

**ITEM AD5-36 Refer to MC-E3.2 - MECHANICAL EQUIPMENT AND CONNECTION SCHEDULE**

**ADD** "CUH-1" to Mechanical Equipment Connection and Control Schedule. Properties of "CUH-1" across as follows: CUH-1, CABINET HEATER, CORR 163, 3MCA, 1, 120, HS-LP-2, 20/1, 2#12, 1#12G, 3/4"C.

**ITEM AD5-37 Refer to MC-L3.2 SITE GRADING, E&SC, AND UTILITY PLAN - SOUTHEAST**

**AMEND** Site Utility Plan Notes #5 to read as follows: "PROVIDE TRENCHING AS SHOWN FOR OTHER TRADES. PROVIDE APPROPRIATE TRENCHING AS NEEDED FOR LEGRAND GROUND BOXES (#XB814C515BK) IN APPROXIMATE LOCATIONS SHOWN. COORDINATE ALL WORK WITH RELATED TRADES AND DRAWINGS / SPECIFICATIONS. SEE DETAIL 11/MC-L4.1.

End of Addendum 5



Alfred-Almond CSD  
2025 Capital Improvement Project  
Milestone Schedule

| ID | Task Name                                        | Duration | Start        | Finish       | Predecessors |                                                  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|----|--------------------------------------------------|----------|--------------|--------------|--------------|--------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 1  | GENERAL CONDITIONS                               | 18 days  | Mon 8/17/26  | Wed 9/9/26   |              | GENERAL CONDITIONS                               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 2  | Temporary Facilities & Controls                  | 18 days  | Mon 8/17/26  | Wed 9/9/26   |              | Temporary Facilities & Controls                  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 3  | Mobilization                                     | 1 day    | Mon 8/17/26  | Mon 8/17/26  |              | Mobilization                                     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 4  | Establish Staging & Laydown Areas                | 5 days   | Tue 8/18/26  | Mon 8/24/26  | 3            | Establish Staging & Laydown Areas                |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 5  | Temporary Fencing                                | 2 days   | Tue 8/25/26  | Wed 8/26/26  | 4            | Temporary Fencing                                |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 6  | Temporary Access Roadways                        | 10 days  | Thu 8/27/26  | Wed 9/9/26   | 5            | Temporary Access Roadways                        |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 7  | Temporary Partitions & Controls                  | 5 days   | Thu 8/27/26  | Wed 9/2/26   | 5            | Temporary Partitions & Controls                  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 8  | AREA D                                           | 397 days | Thu 9/3/26   | Fri 3/10/28  |              | AREA D                                           |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 9  | Natatorium                                       | 397 days | Thu 9/3/26   | Fri 3/10/28  |              | Natatorium                                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 10 | Asbestos Abatement                               | 2 days   | Thu 9/3/26   | Fri 9/4/26   | 7            | Asbestos Abatement                               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 11 | Demolition                                       | 20 days  | Mon 9/7/26   | Fri 10/2/26  | 10           | Demolition                                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 12 | Footings (To follow Locker Rooms)                | 15 days  | Mon 11/30/26 | Fri 12/18/26 | 28           | Footings (To follow Locker Rooms)                |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 13 | Foundation Walls (To follow Locker Rooms)        | 15 days  | Mon 12/21/26 | Fri 1/8/27   | 12           | Foundation Walls (To follow Locker Rooms)        |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 14 | Vertical Steel (To follow Locker Rooms)          | 15 days  | Mon 1/11/27  | Fri 1/29/27  | 13           | Vertical Steel (To follow Locker Rooms)          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 15 | Steel Joists & Bridging (To follow Locker Rooms) | 15 days  | Mon 2/1/27   | Fri 2/19/27  | 14           | Steel Joists & Bridging (To follow Locker Rooms) |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 16 | Decking                                          | 20 days  | Mon 2/22/27  | Fri 3/19/27  | 15           | Decking                                          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 17 | Pool Basemat                                     | 10 days  | Mon 3/22/27  | Fri 4/2/27   | 16           | Pool Basemat                                     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 18 | Pool Walls                                       | 15 days  | Mon 4/5/27   | Fri 4/23/27  | 17           | Pool Walls                                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 19 | Envelope                                         | 30 days  | Mon 3/22/27  | Fri 4/30/27  | 16           | Envelope                                         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 20 | Interior Buildout                                | 40 days  | Mon 5/3/27   | Fri 6/25/27  | 19           | Interior Buildout                                |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 21 | Interior Finishes                                | 100 days | Mon 9/20/27  | Fri 2/4/28   | 34           | Interior Finishes                                |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 22 | Alternate #4 Secondary Boiler                    | 15 days  | Mon 2/21/28  | Fri 3/10/28  |              | Alternate #4 Secondary Boiler                    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 23 | Pool Commissioning                               | 15 days  | Mon 2/7/28   | Fri 2/25/28  | 21           | Pool Commissioning                               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 24 | Punchlist & Close Out                            | 15 days  | Mon 2/21/28  | Fri 3/10/28  | 21           | Punchlist & Close Out                            |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 25 | Girls & Boys Locker Rooms                        | 365 days | Mon 10/5/26  | Fri 2/25/28  |              | Girls & Boys Locker Rooms                        |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 26 | Demolition                                       | 15 days  | Mon 10/5/26  | Fri 10/23/26 | 11           | Demolition                                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 27 | Footings                                         | 15 days  | Mon 10/26/26 | Fri 11/13/26 | 26           | Footings                                         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 28 | Foundation Walls                                 | 10 days  | Mon 11/16/26 | Fri 11/27/26 | 27           | Foundation Walls                                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 29 | Backfill & Underground Utilities                 | 25 days  | Mon 11/30/26 | Fri 1/1/27   | 28           | Backfill & Underground Utilities                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 30 | Vertical Steel                                   | 5 days   | Mon 11/30/26 | Fri 12/4/26  | 28           | Vertical Steel                                   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 31 | Steel Joists & Bridging                          | 10 days  | Mon 12/7/26  | Fri 12/18/26 | 30           | Steel Joists & Bridging                          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 32 | Decking                                          | 10 days  | Mon 12/21/26 | Fri 1/1/27   | 31           | Decking                                          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 33 | Slab-on-Grade                                    | 15 days  | Mon 1/4/27   | Fri 1/22/27  | 32           | Slab-on-Grade                                    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 34 | Interior Buildout                                | 60 days  | Mon 6/28/27  | Fri 9/17/27  | 20           | Interior Buildout                                |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 35 | Interior Finishes                                | 100 days | Mon 9/20/27  | Fri 2/4/28   | 34           | Interior Finishes                                |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 36 | Punchlist & Closeout                             | 15 days  | Mon 2/7/28   | Fri 2/25/28  | 35           | Punchlist & Closeout                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 37 | Toilet Rooms & Offices                           | 50 days  | Fri 9/3/27   | Thu 11/11/27 |              | Toilet Rooms & Offices                           |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 38 | Demolition                                       | 10 days  | Fri 9/3/27   | Thu 9/16/27  |              | Demolition                                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 39 | Interior Buildout                                | 15 days  | Fri 9/17/27  | Thu 10/7/27  | 38           | Interior Buildout                                |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 40 | Interior Finishes                                | 20 days  | Fri 10/8/27  | Thu 11/4/27  | 39           | Interior Finishes                                |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |



Alfred-Almond CSD  
2025 Capital Improvement Project  
Milestone Schedule

| ID | Task Name                         | Duration  | Start        | Finish       | Predecessors | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct |
|----|-----------------------------------|-----------|--------------|--------------|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 41 | Punchlist & Closeout              | 5 days    | Fri 11/5/27  | Thu 11/11/27 | 40           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 42 | Maintenance Shop                  | 50 days   | Fri 9/3/27   | Thu 11/11/27 |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 43 | Demolition                        | 10 days   | Fri 9/3/27   | Thu 9/16/27  |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 44 | Interior Buildout                 | 15 days   | Fri 9/17/27  | Thu 10/7/27  | 43           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 45 | Interior Finishes                 | 20 days   | Fri 10/8/27  | Thu 11/4/27  | 44           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 46 | Punchlist & Closeout              | 5 days    | Fri 11/5/27  | Thu 11/11/27 | 45           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 47 | AREA F                            | 109 days  | Mon 3/29/27  | Thu 8/26/27  |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 48 | Elevator & Entrance               | 109 days  | Mon 3/29/27  | Thu 8/26/27  |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 49 | ACM Abatement (Spring Break 2027) | 2 days    | Mon 3/29/27  | Tue 3/30/27  |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 50 | Demolition                        | 10 days   | Wed 3/31/27  | Tue 4/13/27  | 49           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 51 | Foundations                       | 10 days   | Wed 4/14/27  | Tue 4/27/27  | 50           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 52 | Structural Steel                  | 7 days    | Wed 4/28/27  | Thu 5/6/27   | 51           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 53 | Envelope                          | 15 days   | Fri 5/7/27   | Thu 5/27/27  | 52           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 54 | Interior Buildout                 | 20 days   | Fri 5/28/27  | Thu 6/24/27  | 53           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 55 | Interior Finishes                 | 20 days   | Fri 6/25/27  | Thu 7/22/27  | 54           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 56 | Elevator Cab                      | 15 days   | Fri 7/23/27  | Thu 8/12/27  | 55           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 57 | Sitework                          | 5 days    | Fri 8/13/27  | Thu 8/19/27  | 56           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 58 | Punchlist & Start-Up              | 5 days    | Fri 8/20/27  | Thu 8/26/27  | 57           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 59 | Multi-Purpose Room 31             | 49 days   | Tue 6/1/27   | Fri 8/6/27   |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 60 | Demolition                        | 7 days    | Tue 6/1/27   | Wed 6/9/27   |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 61 | Interior Buildout                 | 7 days    | Thu 6/10/27  | Fri 6/18/27  | 60           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 62 | Interior Finishes                 | 10 days   | Mon 6/21/27  | Fri 7/2/27   | 61           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 63 | Gym Equipment                     | 5 days    | Mon 7/5/27   | Fri 7/9/27   | 62           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 64 | Gym Floor Refinishing             | 15 days   | Mon 7/12/27  | Fri 7/30/27  | 63           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 65 | Punchlist & Closeout              | 5 days    | Mon 8/2/27   | Fri 8/6/27   | 64           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 66 | AREA G                            | 45 days   | Mon 6/28/27  | Fri 8/27/27  |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 67 | Competition Gym Room A111         | 45 days   | Mon 6/28/27  | Fri 8/27/27  |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 68 | Demolition                        | 3 days    | Mon 6/28/27  | Wed 6/30/27  |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 69 | Interior Buildout                 | 2 days    | Thu 7/1/27   | Fri 7/2/27   | 68           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 70 | Interior Finishes                 | 2 days    | Mon 7/5/27   | Tue 7/6/27   | 69           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 71 | Gym Equipment                     | 12 days   | Wed 7/7/27   | Thu 7/22/27  | 70           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 72 | Gym Floor Refinishing             | 15 days   | Fri 7/23/27  | Thu 8/12/27  | 71           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 73 | Bleachers                         | 10 days   | Fri 8/13/27  | Thu 8/26/27  | 72           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 74 | Punchlist & Closeout              | 1 day     | Fri 8/27/27  | Fri 8/27/27  | 73           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 75 | AREA B                            | 1762 days | Thu 11/19/20 | Fri 8/27/27  |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 76 | 1st & 2nd FI Toilet Rooms         | 45 days   | Mon 6/28/27  | Fri 8/27/27  |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 77 | Demolition                        | 7 days    | Mon 6/28/27  | Tue 7/6/27   |              |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 78 | Interior Buildout                 | 15 days   | Wed 7/7/27   | Tue 7/27/27  | 77           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 79 | Interior Finishes                 | 18 days   | Wed 7/28/27  | Fri 8/20/27  | 78           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 80 | Punchlist & Closeout              | 5 days    | Mon 8/23/27  | Fri 8/27/27  | 79           |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |



Alfred-Almond CSD  
2025 Capital Improvement Project  
Milestone Schedule

| ID  | Task Name                                | Duration  | Start        | Finish       | Predecessors |
|-----|------------------------------------------|-----------|--------------|--------------|--------------|
| 81  | Dumbwaiter Infill                        | 5 days    | Thu 11/19/20 | Wed 11/25/20 |              |
| 82  | Demolition                               | 5 days    | Thu 11/19/20 | Wed 11/25/20 |              |
| 83  | Structural Steel                         | 5 days    | Thu 11/19/20 | Wed 11/25/20 |              |
| 84  | Slab Infill                              | 5 days    | Thu 11/19/20 | Wed 11/25/20 |              |
| 85  | ALTERNATE #3 AREA H TOILET ROOMS         | 50 days   | Mon 6/26/28  | Fri 9/1/28   |              |
| 86  | 1st & 2nd FI Toilet Rooms                | 50 days   | Mon 6/26/28  | Fri 9/1/28   |              |
| 87  | Demolition                               | 7 days    | Mon 6/26/28  | Tue 7/4/28   |              |
| 88  | Interior Buildout                        | 18 days   | Wed 7/5/28   | Fri 7/28/28  | 87           |
| 89  | Interior Finishes                        | 20 days   | Mon 7/31/28  | Fri 8/25/28  | 88           |
| 90  | Punchlist& Closeout                      | 5 days    | Mon 8/28/28  | Fri 9/1/28   | 89           |
| 91  | AREA A                                   | 1757 days | Thu 11/19/20 | Fri 8/20/27  |              |
| 92  | Slate Roof Repairs (Base Bid)            | 15 days   | Wed 5/5/27   | Tue 5/25/27  |              |
| 93  | Alternate #1 Slate Roof Reconstruction   | 40 days   | Mon 6/28/27  | Fri 8/20/27  |              |
| 94  | Auditorium Theatrical Upgrades           | 40 days   | Mon 6/28/27  | Fri 8/20/27  |              |
| 95  | Alternate #2 Library Electrical Upgrades | 15 days   | Mon 6/28/27  | Fri 7/16/27  |              |
| 96  | <New Task>                               | 1 day?    | Thu 11/19/20 | Thu 11/19/20 |              |
| 97  | SITEWORK                                 | 30 days   | Mon 6/28/27  | Fri 8/6/27   |              |
| 98  | South Entrance Drive Re-Pave             | 20 days   | Mon 6/28/27  | Fri 7/23/27  |              |
| 99  | Upper Parking Lot Re-Pave                | 7 days    | Thu 7/15/27  | Fri 7/23/27  | 98FS-7 days  |
| 100 | Walking Path Re-Pave                     | 3 days    | Wed 7/21/27  | Fri 7/23/27  | 98FS-3 days  |
| 101 | Alternate #5 Track Resurfacing           | 30 days   | Mon 6/28/27  | Fri 8/6/27   |              |

SECTION 09 72 00  
WALL COVERINGS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Vinyl Wallcovering

1.2 RELATED REQUIREMENTS

- A. Section 01 61 16 - Volatile Organic Compound (VOC) Content Restrictions.

1.3 REFERENCE STANDARDS

- A. ASTM D1308 - Standard Test Method for Effect of Household Chemicals on Clear and Pigmented Coating Systems; 2020.
- B. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2024.
- C. ASTM F793/F793M - Standard Classification of Wall Coverings and Ceiling Coverings by Use Characteristics; 2025.

1.4 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide data on wall covering and adhesive.
- C. Shop Drawings: Indicate wall elevations with seaming layout.
- D. Samples: Submit two samples of each wall covering, 12 by 12 inch in size illustrating color, finish, and texture. Verify image and substrate with Interior Designer/Architect/Owner.
- E. Manufacturer's Installation Instructions: Indicate special procedures and perimeter conditions requiring special attention.
- F. Maintenance Data: Submit data on cleaning, touch-up, and repair of covered surfaces.
- G. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
  - 1. See Section 01 60 00 - Product Requirements, for additional provisions.
  - 2. Extra Wall Covering Materials: 25 linear feet of each color and pattern of wall covering; store where directed.
  - 3. Package and label each roll by manufacturer, color and pattern, and destination room number.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section with minimum three years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of the type specified and with at least three years of documented experience.

1.6 MOCK-UPS

- A. See Section 01 40 00 - Quality Requirements for additional requirements.

- B. Provide image full height, illustrating installed wall covering and joint seaming technique.
- C. Locate where directed.
- D. Mock-up may remain as part of the Work.

#### 1.7 DELIVERY, STORAGE, AND HANDLING

- A. Inspect roll materials at arrival on site, to verify acceptability.
- B. Protect packaged adhesive from temperature cycling and cold temperatures.
- C. Do not store roll goods on end.

#### 1.8 FIELD CONDITIONS

- A. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the adhesive or wall covering product manufacturer.
- B. Maintain these conditions 24 hours before, during, and after installation of adhesive and wall covering.

### PART 2 PRODUCTS

#### 2.1 WALL COVERINGS

- A. General Requirements:
  - 1. Surface Burning Characteristics: Flame spread/Smoke developed index of 25/50, maximum, when tested in accordance with ASTM E84.
  - 2. Chemical and Stain Resistance: No visible staining or discoloration and no damage to surface texture when tested in accordance with ASTM D1308.
- B. Wall Covering - Type WC-1,2:
  - 1. Comply with ASTM F793/F793M, Category V, Type II.
  - 2. Total Weight: 21 ounces per linear yard.
  - 3. Roll Width: 54 inch.
  - 4. Face: Stipple Embossed PVC-Vinyl.
  - 5. Inks: UV-LED inks with minimal VOC's containing naturally-derived monomers and oligomers. UV-LED inks with nearly zero VOC's containing up to 50% naturally-derived monomers and oligomers. UL GREENGUARD Gold Certified meeting California CDPH Standard Method v1.2, Classroom and Office Environment.
  - 6. Overcoating: Wallmax Coating required, highly durable heavy metal free UV cured matte coating with fire retardancy, anti-microbial, mold and mildew resistant properties.
  - 7. Backing: Non-woven, synthetic backed embossed PVC-Vinyl with UV-LED inks.
  - 8. Weight: 20 oz. per lineal yard.
  - 9. Color: Architect to provide artwork.
  - 10. Surface Texture: Lightly textured.
  - 11. Fire and Smoke:
    - a. ASTM E84, Class A.
    - b. NFPA 101 Life Safety: Passed Requirements.
    - c. NFPA 286 Corner Burn Test, Passed Requirements.
  - 12. Anti-Microbial Protection:
    - a. Does not support growth of bacteria, viruses or fungi.
    - b. ASTM G21, G22, and E1428.
  - 13. Basis of Design:
    - a. Surface Materials; Level Stipple Vinyl Wallcovering: [www.surfacematerials.com](http://www.surfacematerials.com).
    - b. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Adhesive: Type recommended by wall covering manufacturer to suit application to substrate.

- D. Substrate Filler: As recommended by adhesive and wall covering manufacturers; compatible with substrate.
- E. Substrate Primer and Sealer: Alkyd enamel type.

## PART 3 EXECUTION

### 3.1 EXAMINATION

- A. Verify that substrate surfaces are prime painted and ready to receive work, and comply with requirements of wall covering manufacturer.
- B. Measure moisture content of surfaces using an electronic moisture meter. Do not apply wall coverings if moisture content of substrate exceeds level recommended by wall covering manufacturer.
- C. Verify flatness tolerance of surfaces does not vary more than 1/8 inch in 10 feet nor vary at a rate greater than 1/16 inch/ft.

### 3.2 PREPARATION

- A. Fill cracks in substrate and smooth irregularities with filler; sand smooth.
- B. Wash impervious surfaces with tetra-sodium phosphate, rinse and neutralize; wipe dry.
- C. Surface Appurtenances: Remove or mask electrical plates, hardware, light fixture trim, escutcheons, and fittings prior to preparing surfaces or finishing.
- D. Apply one coat of primer sealer to substrate surfaces. Allow to dry. Lightly sand smooth.
- E. Vacuum clean surfaces free of loose particles.

### 3.3 INSTALLATION

- A. Apply adhesive and wall covering in accordance with manufacturer's instructions.
- B. Apply adhesive to wall surface immediately prior to application of wall covering. Let contact adhesive set tack free.
- C. Apply wall covering smooth, without wrinkles, gaps or overlaps. Eliminate air pockets and ensure full bond to substrate surface.
- D. Butt edges tightly.
- E. Remove excess adhesive while wet from seam before proceeding to next wall covering sheet. Wipe clean with dry cloth.


### 3.4 CLEANING

- A. Clean wall coverings of excess adhesive, dust, dirt, and other contaminants.
- B. Reinstall wall plates and accessories removed prior to work of this section.

### 3.5 SCHEDULES

- A. Refer to Finish Key and Schedule.

END OF SECTION

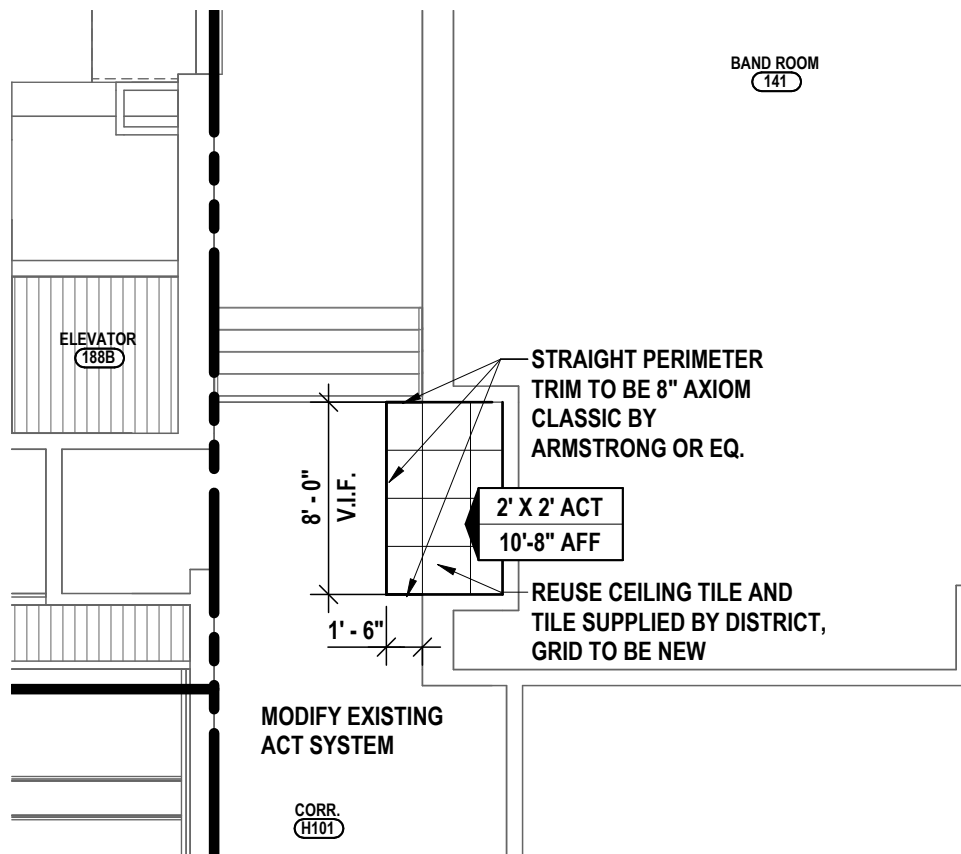

1 PARTIAL FIRST FLOOR REFLECTED CEILING PLAN @ CORRIDOR H101  
1/8" = 1'-0"

# PARTIAL REFLECTED CEILING PLAN @ CORRIDOR H101

2025 CAPITAL PROJECT

ALFRED-ALMOND CSD

6795 ROUTE 21 ALMOND, NY 14804

Copyright: 2026

**HUNT**

ENGINEERS | ARCHITECTS | SURVEYORS

ALBANY, NY - BINGHAMTON, NY - HORSEHEADS, NY - ROCHESTER, NY

TOWANDA, PA - WILLIAMSPORT, PA

WWW.HUNT-EAS.COM 607 - 358 - 1000


NY CERTIFICATE NO. 0018220 PA CERTIFICATE NO. TSC2203131464-1

**AD5-A1**

DATE:  
07/20/2026

PROJECT NO:  
2028-059



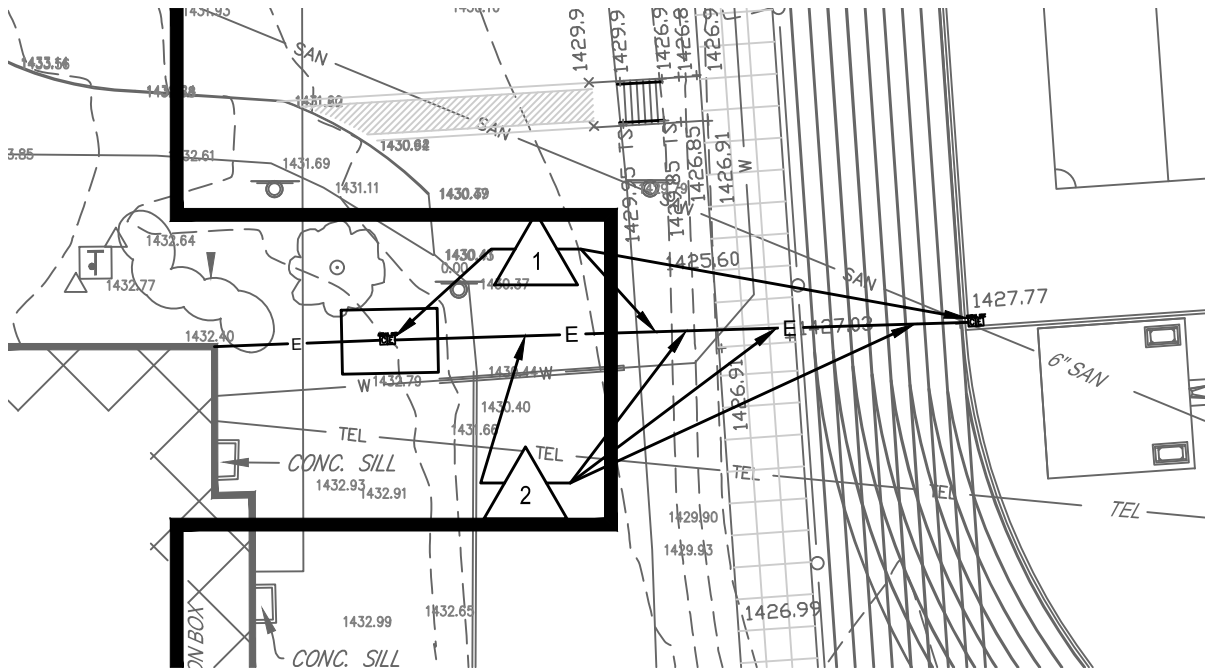

# 1 SITE UTILITY PLAN

SCALE: 1" = 30'



## SITE ELECTRIC UTILITY PLAN NOTES:

1. PROVIDE 2#10, 1#10G, 1"C AND 20/1 BREAKER WITH SPARE 1" FROM PANEL LP-6. PROVIDE APPROPRIATE LEGRAND GROUND BOXES (#XB814C515BK) IN APPROXIMATE LOCATIONS SHOWN. THE CIRCUIT ROUTING ON THE BUILDING EXTERIOR SHALL BE DISCREET AND KEPT TO A MINIMUM PRIOR TO TRANSITIONING TO UNDERGROUND PATHWAYS. COORDINATE ALL WORK WITH RELATED TRADES AND DRAWINGS / SPECIFICATIONS. PROVIDE (2) GFCI RECEPTACLES MOUNTED TO BOX INTERIOR AT TRACK BOX. SEE DETAIL 11/MC-L4.1.
2. DIRECTIONAL DRILL E/COMM SERVICES UNDER SITE FEATURES AND EXISTING TRACK TO LIMITS SHOWN BY OTHER TRADES. COORDINATE WITH OTHER TRADES FOR INSTALLATION. SEE SPECIFICATIONS.



SCALE IN FEET



SCALE: 1" = 30'

### SITE ELECTRICAL PLAN

2025 CAPITAL PROJECT  
ALFRED-ALMOND CSD

6795 ROUTE 21, ALMOND, NY 14804

**HUNT** ENGINEERS | ARCHITECTS | SURVEYORS  
HORSEHEADS, NY 607 - 358 - 1000 ROCHESTER, NY 585 - 327 - 7950  
TOWANDA, PA 570 - 265 - 4868 BINGHAMTON, NY 607 - 798 - 8081  
ALBANY, NY 607 - 798 - 8081 WWW.HUNT-EAS.COM  
NY CERTIFICATE NO. 0018220 PA CERTIFICATE NO. TSC2203131464-1

**AD5-E1**

DATE:  
07/21/2024

PROJECT NO:  
2028-059

Branch Panel: HS-LP-2

Location: MAINT. 141  
Supply From: HS-PP-2  
Mounting: Surface  
Enclosure: Type 1

Volts: 120/208 Wye  
Phases: 3  
Wires: 4

A.I.C. Rating: 22K  
Mains Type: MCB  
Mains Rating: 225 A  
MCB Rating: 200 A

| CKT | Circuit Description               | Trip | Poles | A | B | C | Poles | Trip | Circuit Description               | CKT |
|-----|-----------------------------------|------|-------|---|---|---|-------|------|-----------------------------------|-----|
| 1   | MAINT SHOP A141 CONV RECEPT       | 20 A | 1     |   |   |   | 1     | 20 A | OFFICE 134A CONV RECEPT           | 2   |
| 3   | OFFICE 164 CONV RECEPT            | 20 A | 1     |   |   |   | 1     | 20 A | TR 146A, 146B, 146C CONV RECEPT   | 4   |
| 5   | CORR 163 CONV RECEPT              | 20 A | 1     |   |   |   | 1     | 20 A | BOYS LOCKER RM 137 CONV RECEPT    | 6   |
| 7   | BOYS LOCKER RM 137 HAIR DRYER #!  | 20 A | 1     |   |   |   | 1     | 20 A | BOYS LOCKER RM 137 HAIR DRYER #2  | 8   |
| 9   | GIRLS LOCKER RM 140 HAIR DRYER #! | 20 A | 1     |   |   |   | 1     | 20 A | GIRLS LOCKER RM 140 HAIR DRYER #2 | 10  |
| 11  | CORR 153 WATER FOUNTAIL SOUTH     | 20 A | 1     |   |   |   | 1     | 20 A | CORR 153 WATER FOUNTAIL NORTH     | 12  |
| 13  | GIRLS LOCKER ROOM 140 CONV RECEPT | 20 A | 1     |   |   |   | 1     | 20 A | OFICE 1354A CONV. RECEPT          | 14  |
| 15  | NAN. OFFICE. N.W. CONV. RECEPTS   | 20 A | 1     |   |   |   | 1     | 20 A | NAN. OFFICE. N. CONV. RECEPTS     | 16  |
| 17  | NAN. OFFICE. N.E. CONV. RECEPTS   | 20 A | 1     |   |   |   | 1     | 20 A | BASEMENT NW CONV. RECEPT.         | 18  |
| 19  | POOL ROOM W. RECEPTS              | 20 A | 1     |   |   |   | 1     | 20 A | POOL ROOM S.E. CONV. RECEPT       | 20  |
| 21  | EF-2                              | 20 A | 1     |   |   |   | 1     | 20 A | SCOREBOARD                        | 22  |
| 23  | EF-3                              | 20 A | 1     |   |   |   | 1     | 20 A | SCOREBOARD                        | 24  |
| 25  | EF-4                              | 20 A | 1     |   |   |   | 1     | 20 A | SCOREBOARD                        | 26  |
| 27  | AT-1                              | 20 A | 1     |   |   |   | 1     | 20 A | CC-1                              | 28  |
| 29  | TC-1                              | 20 A | 1     |   |   |   | 1     | 20 A | B-1                               | 30  |
| 31  | WATER COOLER                      | 20 A | 1     |   |   |   | 1     | 20 A | EXG. B-2                          | 32  |
| 33  | AC-1                              | 20 A | 2     |   |   |   | 3     | 30 A | EXG. CONDENSING PUMP              | 34  |
| 35  | --                                | --   | --    |   |   |   | --    | --   | --                                | 36  |
| 37  | CUH-1                             | 20 A | 1     |   |   |   | --    | --   | --                                | 38  |
| 39  | SPARE                             | 20 A | 1     |   |   |   | 1     | 20 A | SPARE                             | 40  |
| 41  | SPARE                             | 20 A | 1     |   |   |   | 1     | 20 A | SPARE                             | 42  |

Notes:

|             |          |
|-------------|----------|
| DRAWN BY:   | SPS      |
| CHECKED BY: | TAWC     |
| DATE:       | 07/21/26 |



"IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER'S, ARCHITECT'S OR SURVEYOR'S SEAL."

HUNT

ENGINEERS | ARCHITECTS | SURVEYORS

ALBANY, NY - BINGHAMTON, NY - HORSEHEADS, NY - ROCHESTER, NY  
TOWANDA, PA - WILLIAMSPORT, PA  
WWW.HUNT-EAS.COM 607 - 358 - 1000  
NY CERTIFICATE NO. 0018220 PA CERTIFICATE NO. TSC22031464-1


PANEL HS-LP-2

2025 CAPITAL PROJECT  
ALFRED-ALMOND CSD  
6795 ROUTE 21, ALMOND, NY 14804

AD5-E2

PROJECT NO: 2028-059




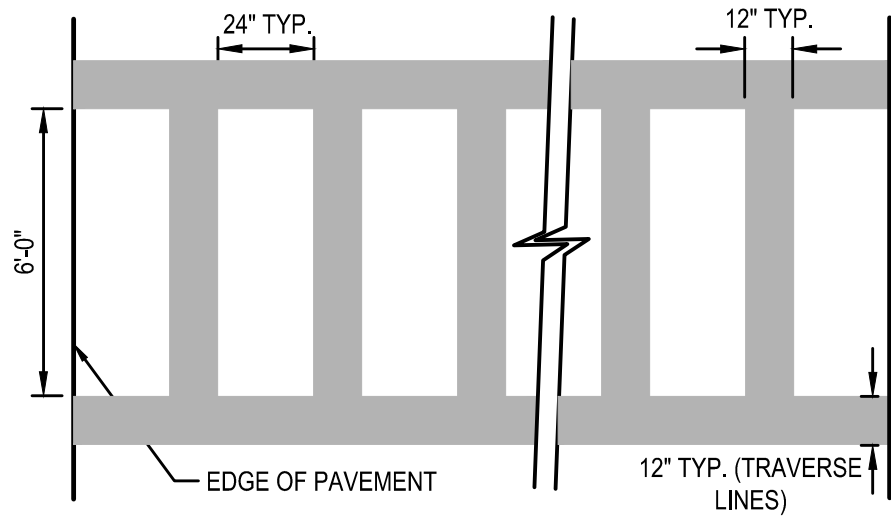

**NOTE:**  
ALL CROSSWALK MARKINGS SHALL BE WHITE REFLECTORIZED PAVEMENT STRIPE.


### 3 CROSSWALK STRIPING

SCALE: 1/4" = 1'-0"

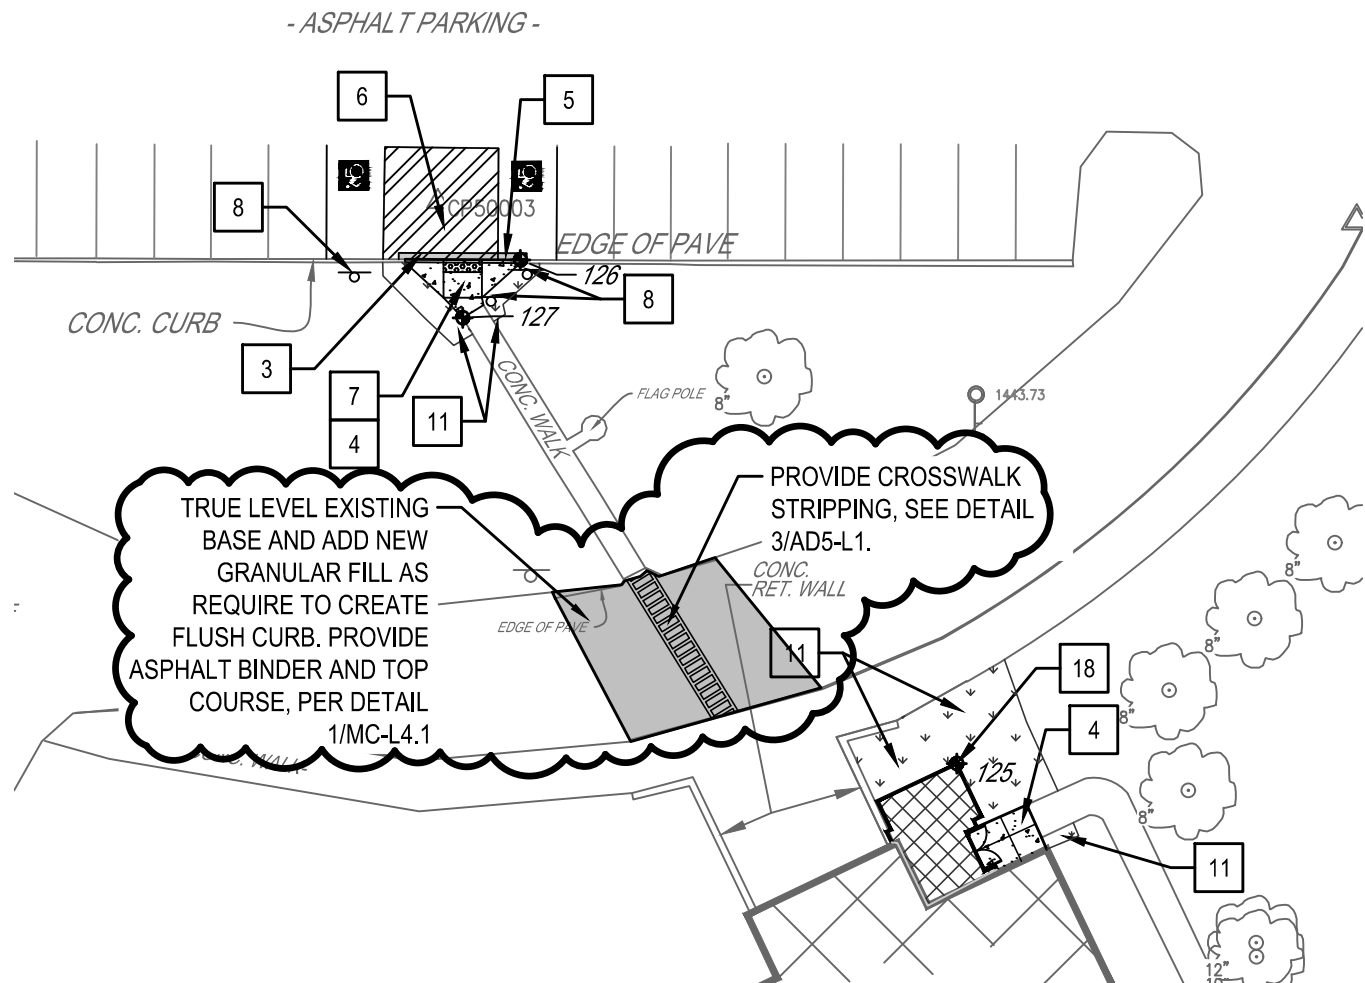

### 2 SITE IMPROVEMENT PLAN

SCALE: 1" = 30'

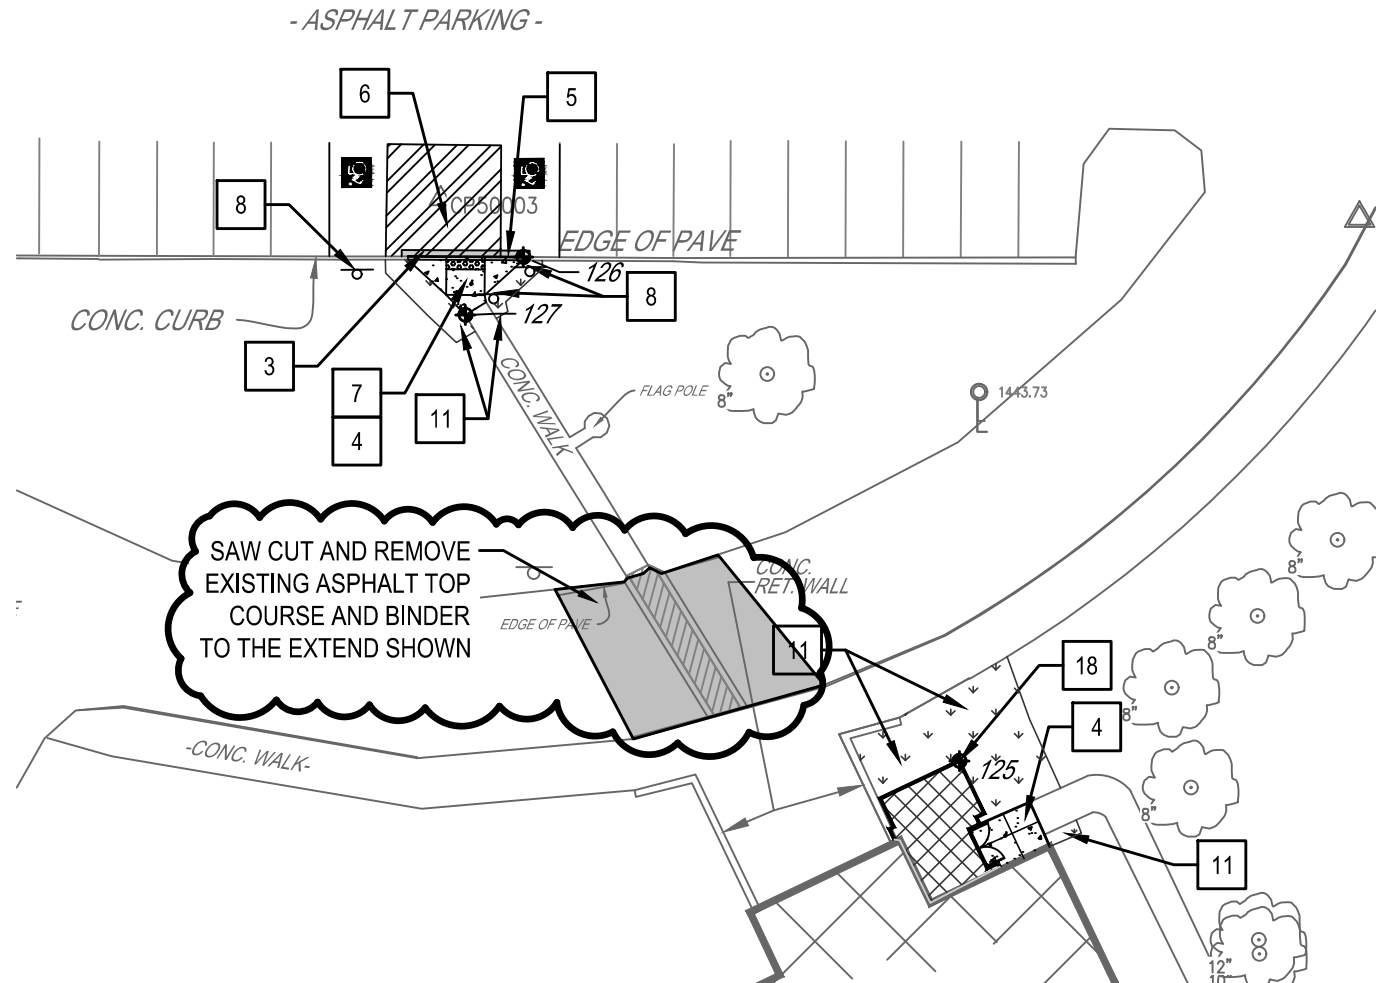

### 1 SITE DEMOLITION PLAN

SCALE: 1" = 30'

|             |            |
|-------------|------------|
| DRAWN BY:   | DD         |
| CHECKED BY: | LG         |
| DATE:       | 07/22/2026 |

Copyright 2026

IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER'S, ARCHITECT'S OR SURVEYOR'S SEAL.

**HUNT ENGINEERS | ARCHITECTS | SURVEYORS**  
 HORSEHEADS, NY 607-358-1000 ROCHESTER, NY 585-327-7950  
 TOWANDA, PA 570-265-4868 BINGHAMTON, NY 607-798-8081  
 ALBANY, NY 607-798-8081 WWW.HUNT-EAS.COM  
 NY CERTIFICATE NO. 0018220 PA CERTIFICATE NO. TSC2203131464-1

**ASPHALT PAVEMENT REPLACEMENT**  
**ALFRED-ALMOND CSD**  
**2025 CAPITAL PROJECT**  
 6795 ROUTE 21, ALMOND, NY 14804

**AD5-L1**

PROJECT NO: 2028-059

10" ALFRED ALMOND

10" EAGLES NEST


1 SIGN TYPE 1 - DIMENSIONAL LETTERS  
3/4" = 1'-0"

1/2" THICK DIMENSIONAL RESIN  
LETTERS, MOUNTED AS RECOMMENDED  
BY MANUFACTURER.

| ALTERNATE ROOM FINISH SCHEDULE |            |                           |              |                                                      |                  |                                            |                   |                                                                                                                                                    |
|--------------------------------|------------|---------------------------|--------------|------------------------------------------------------|------------------|--------------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| ROOM #                         | ROOM NAME  | FLOOR FINISH              | BASE FINISH  | WALL FINISH                                          | DOOR FRAME COLOR | CEILING FINISH                             | COUNTERTOP FINISH | REMARKS                                                                                                                                            |
| FIRST FLOOR - AREA D           |            |                           |              |                                                      |                  |                                            |                   |                                                                                                                                                    |
| 02                             | NATATORIUM | ALT #6: FT-1,2,3,4,5, G-2 | CB-2,4,5     | PNT-5,6, WT-1,2,3,4, AWP-1,2, RP-1, G-1, SSM-1, TR-1 | PNT-4            | ACOUSTIC DECK: PNT-5, GLU-LAM BEAMS: STN-1 | SSM-1             | ALT #6: POOL BASIN TO RECEIVE MOSAIC TILE, FT-4,5, FT-5 TO INDICATE RACING LANES, RACING TARGETS, AND 4" BREAK LINE AS SHOWN ON FLOOR FINISH PLAN. |
| FIRST FLOOR - AREA H           |            |                           |              |                                                      |                  |                                            |                   |                                                                                                                                                    |
| 024                            | PASSAGE    | ALT #3: FT-6, G-3, TS-1   | ALT #3: CB-3 | ALT #3: WT-5,6,7, TR-3,4, G-1, PNT-1                 | ALT #3: PNT-4    | ALT #3: ACT-1                              | -                 | ALT #3: PROVIDE ALL WORK ASSOCIATED WITH THE COMPLETE RENOVATIONS OF THE FIRST AND SECOND FLOOR TOILET ROOMS AS INDICATED ON CONTRACT DOCUMENTS.   |
| 024A                           | T.R.       | ALT #3: FT-6, G-3         | ALT #3: CB-1 | ALT #3: WT-5,6,7, TR-3,4, G-1, PNT-1                 | ALT #3: PNT-4    | ALT #3: ACT-1                              | -                 | ALT #3: PROVIDE ALL WORK ASSOCIATED WITH THE COMPLETE RENOVATIONS OF THE FIRST AND SECOND FLOOR TOILET ROOMS AS INDICATED ON CONTRACT DOCUMENTS.   |
| 024B                           | T.R.       | ALT #3: FT-6, G-3         | ALT #3: CB-1 | ALT #3: WT-5,6,7, TR-3,4, G-1, PNT-1                 | ALT #3: PNT-4    | ALT #3: ACT-1                              | -                 | ALT #3: PROVIDE ALL WORK ASSOCIATED WITH THE COMPLETE RENOVATIONS OF THE FIRST AND SECOND FLOOR TOILET ROOMS AS INDICATED ON CONTRACT DOCUMENTS.   |
| 024C                           | T.R.       | ALT #3: FT-6, G-3         | ALT #3: CB-1 | ALT #3: WT-5,6,7, TR-3,4, G-1, PNT-1                 | ALT #3: PNT-4    | ALT #3: ACT-1                              | -                 | ALT #3: PROVIDE ALL WORK ASSOCIATED WITH THE COMPLETE RENOVATIONS OF THE FIRST AND SECOND FLOOR TOILET ROOMS AS INDICATED ON CONTRACT DOCUMENTS.   |
| SECOND FLOOR - AREA H          |            |                           |              |                                                      |                  |                                            |                   |                                                                                                                                                    |
| 051                            | PASSAGE    | ALT #3: FT-6, G-3, TS-1   | ALT #3: CB-3 | ALT #3: WT-5,6,7, TR-3,4, G-1, PNT-1                 | ALT #3: PNT-4    | ALT #3: ACT-1                              | -                 | ALT #3: PROVIDE ALL WORK ASSOCIATED WITH THE COMPLETE RENOVATIONS OF THE FIRST AND SECOND FLOOR TOILET ROOMS AS INDICATED ON CONTRACT DOCUMENTS.   |
| 051A                           | T.R.       | ALT #3: FT-6, G-3         | ALT #3: CB-1 | ALT #3: WT-5,6,7, TR-3,4, G-1, PNT-1                 | ALT #3: PNT-4    | ALT #3: ACT-1                              | -                 | ALT #3: PROVIDE ALL WORK ASSOCIATED WITH THE COMPLETE RENOVATIONS OF THE FIRST AND SECOND FLOOR TOILET ROOMS AS INDICATED ON CONTRACT DOCUMENTS.   |
| 051B                           | T.R.       | ALT #3: FT-6, G-3         | ALT #3: CB-1 | ALT #3: WT-5,6,7, TR-3,4, G-1, PNT-1                 | ALT #3: PNT-4    | ALT #3: ACT-1                              | -                 | ALT #3: PROVIDE ALL WORK ASSOCIATED WITH THE COMPLETE RENOVATIONS OF THE FIRST AND SECOND FLOOR TOILET ROOMS AS INDICATED ON CONTRACT DOCUMENTS.   |
| 051C                           | T.R.       | ALT #3: FT-6, G-3         | ALT #3: CB-1 | ALT #3: WT-5,6,7, TR-3,4, G-1, PNT-1                 | ALT #3: PNT-4    | ALT #3: ACT-1                              | -                 | ALT #3: PROVIDE ALL WORK ASSOCIATED WITH THE COMPLETE RENOVATIONS OF THE FIRST AND SECOND FLOOR TOILET ROOMS AS INDICATED ON CONTRACT DOCUMENTS.   |

| ROOM FINISH SCHEDULE  |                    |                   |             |                                                        |                  |                                            |                   |                                                                                                                                                                                                                                                                                                              |
|-----------------------|--------------------|-------------------|-------------|--------------------------------------------------------|------------------|--------------------------------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ROOM #                | ROOM NAME          | FLOOR FINISH      | BASE FINISH | WALL FINISH                                            | DOOR FRAME COLOR | CEILING FINISH                             | COUNTERTOP FINISH | REMARKS                                                                                                                                                                                                                                                                                                      |
| FIRST FLOOR - AREA B  |                    |                   |             |                                                        |                  |                                            |                   |                                                                                                                                                                                                                                                                                                              |
| 133                   | CORR.              | FT-6, G-3         | CB-3        | PNT-1                                                  | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| 133A                  | T.R.               | FT-6, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| 133B                  | T.R.               | FT-6, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| 133C                  | T.R.               | FT-6, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| 133D                  | T.R.               | FT-6, G-3, TS-1   | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1, PNT-1                               | -                 | PAINT GNB SOFFIT PNT-1 U.N.O. PROVIDE TS-1 AS EDGE PROTECTION FOR TILE.                                                                                                                                                                                                                                      |
| FIRST FLOOR - AREA D  |                    |                   |             |                                                        |                  |                                            |                   |                                                                                                                                                                                                                                                                                                              |
| 02                    | NATATORIUM         | FT-1,2,3,4,5, G-2 | CB-2,4,5    | PNT-5,6, WT-1,2,3,4, AWP-1,2, RP-1,2, G-1, SSM-1, TR-1 | PNT-4            | ACOUSTIC DECK: PNT-5, GLU-LAM BEAMS: STN-1 | SSM-1             | PROVIDE SSM-1 TO CAP ALL COLUMN COVERS AND HALF-WALL COVERS. BASE BID: POOL BASIN TO RECEIVE MARCITE FINISH, MC-1. REFER TO FINISH KEY AND SPECIFICATION 13 11 00 FOR FINISH DETAILS. RAMP TO RECEIVE FT-4,5.                                                                                                |
| 2A                    | STAIR              | SC-1              | RB-1        | PNT-1                                                  | PNT-4            | PNT-1                                      | -                 | PAINT ALL EXPOSED STRUCTURE AND ANY CEILING MOUNTED ELEMENTS PNT-1 U.N.O.                                                                                                                                                                                                                                    |
| 134A                  | OFFICE             | FT-1, G-2         | CB-3        | PNT-5                                                  | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| 135                   | JAN                | FT-1, G-2         | CB-3        | PNT-5                                                  | PNT-4            | PNT-5                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| 137                   | BOYS LOCKER ROOM   | FT-1,7, G-3, TS-1 | CB-3,6      | PNT-5, LK-1,2, TP-1, STN-1                             | PNT-4            | PNT-5                                      | SSM-1             | DECK TO RECEIVE PNT-5. PAINT ALL EXPOSED STRUCTURE AND ANY CEILING MOUNTED ELEMENTS PNT-5 U.N.O. WHERE TILE FT-1 IS APPLIED TO CONCRETE LOCKER BASE, PROVIDE CB-4 WHERE FLOOR TILE MEETS WALL TILE AND WHERE FLOOR TILE MEETS SOLID SURFACE SHOWER SURROUNDS. PROVIDE SOLID SURFACE SHOWER SURROUNDS, SSM-2. |
| 137A                  | T.R.               | FT-1, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | PNT-5                                      | -                 | CEILING TO RECEIVE PAINT, PNT-5.                                                                                                                                                                                                                                                                             |
| 137B                  | T.R.               | FT-1, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | PNT-5                                      | -                 | CEILING TO RECEIVE PAINT, PNT-5.                                                                                                                                                                                                                                                                             |
| 137C                  | T.R.               | FT-1,7, G-3, TS-1 | CB-3,6      | PNT-5, LK-1,2, TP-1, STN-1                             | PNT-4            | PNT-5                                      | SSM-1             | PAINT ALL EXPOSED STRUCTURE AND ANY CEILING MOUNTED ELEMENTS PNT-5 U.N.O. WHERE TILE FT-1 IS APPLIED TO CONCRETE LOCKER BASE, PROVIDE CB-4 WHERE FLOOR TILE MEETS WALL TILE AND WHERE FLOOR TILE MEETS SOLID SURFACE SHOWER SURROUNDS. PROVIDE SOLID SURFACE SHOWER SURROUNDS, SSM-2.                        |
| 140A                  | T.R.               | FT-1, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | PNT-5                                      | -                 | CEILING TO RECEIVE PAINT, PNT-5.                                                                                                                                                                                                                                                                             |
| 140B                  | T.R.               | FT-1, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | PNT-5                                      | -                 | CEILING TO RECEIVE PAINT, PNT-5.                                                                                                                                                                                                                                                                             |
| 142                   | PRACTICE ROOM      | ETR               | ETR         | ETR                                                    | ETR              | ETR                                        | -                 | EXISTING FINISHES TO REMAIN ENTIRELY.                                                                                                                                                                                                                                                                        |
| 143                   | BAND OFFICE        | ETR               | ETR         | ETR                                                    | ETR              | ETR                                        | -                 | EXISTING FINISHES TO REMAIN ENTIRELY.                                                                                                                                                                                                                                                                        |
| 144                   | PRACTICE ROOM      | ETR               | ETR         | ETR                                                    | ETR              | ETR                                        | -                 | EXISTING FINISHES TO REMAIN ENTIRELY.                                                                                                                                                                                                                                                                        |
| 145                   | PRACTICE ROOM      | ETR               | ETR         | ETR                                                    | ETR              | ETR                                        | -                 | EXISTING FINISHES TO REMAIN ENTIRELY.                                                                                                                                                                                                                                                                        |
| 146A                  | T.R.               | FT-6, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 | PROVIDE TS-1 AS EDGE PROTECTION FOR TILE. PATCH TO MATCH TERRAZZO OUTSIDE OF TOILET ROOMS USING TZ-1. PROVIDE TERRAZZO BASE TO MATCH EXISTING.                                                                                                                                                               |
| 146B                  | T.R.               | FT-6, G-3, TS-1   | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 | PROVIDE TS-1 AS EDGE PROTECTION FOR TILE. PATCH TO MATCH TERRAZZO OUTSIDE OF TOILET ROOMS USING TZ-1. PROVIDE TERRAZZO BASE TO MATCH EXISTING.                                                                                                                                                               |
| 146C                  | T.R.               | FT-6, G-3, TS-1   | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 | PROVIDE TS-1 AS EDGE PROTECTION FOR TILE. PATCH TO MATCH TERRAZZO OUTSIDE OF TOILET ROOMS USING TZ-1. PROVIDE TERRAZZO BASE TO MATCH EXISTING.                                                                                                                                                               |
| 147                   | STORAGE            | ETR               | ETR         | ETR                                                    | ETR              | ETR                                        | -                 | EXISTING FINISHES TO REMAIN ENTIRELY.                                                                                                                                                                                                                                                                        |
| 153                   | CORR.              | FT-1, G-3, TS-1   | CB-3        | PNT-6                                                  | PNT-4            | PNT-6                                      | -                 | PAINT ALL EXPOSED STRUCTURE AND ANY CEILING MOUNTED ELEMENTS PNT-6 U.N.O. PROVIDE TS-1 AS EDGE PROTECTION FOR TILE.                                                                                                                                                                                          |
| 163                   | CORR.              | PTM, TZ-1         | PTM, TZB-1  | WC-1, PNT-1, PTM EXISTING                              | PNT-4            | ETR, ACT-2                                 | -                 | PROVIDE NEW ACOUSTIC CEILING TILE, ACT-2. STUDENT ENTRANCE TO POOL TO RECEIVE CUSTOM WALL COVERING.                                                                                                                                                                                                          |
| 164                   | OFFICE             | FT-1, G-2         | CB-3        | PNT-5                                                  | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| A141                  | MAINT. SHOP        | ETR               | ETR, PTM    | ETR, PTM                                               | PNT-4            | PNT-1                                      | -                 | PAINT ALL EXPOSED STRUCTURE AND ANY CEILING MOUNTED ELEMENTS PNT-1 U.N.O.                                                                                                                                                                                                                                    |
| A141A                 | T.R.               | FT-6, G-3, TS-1   | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 | PROVIDE TS-1 AS EDGE PROTECTION FOR TILE.                                                                                                                                                                                                                                                                    |
| FIRST FLOOR - AREA F  |                    |                   |             |                                                        |                  |                                            |                   |                                                                                                                                                                                                                                                                                                              |
| 29                    | STAIRS             | CPT-1,2, TS-1     | RB-1        | PNT-1, PTM                                             | PREFABRICATED    | QWB, PNT-1                                 | -                 | TERMINATE CARPET, CPT-1 AT STAIRS, STAIR TO REMAIN AS TERRAZZO. PROTECT CARPET TILE EDGE WITH TS-1.                                                                                                                                                                                                          |
| 31                    | MULTI-PURPOSE ROOM | WD-1              | RB-2        | WP-1, PNT-1,2,3                                        | PNT-4            | PNT-1                                      | -                 | PROVIDE GAME LINES AS DETAILED ON A DRAWINGS. COLORS TO BE SELECTED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE. PAINT ALL EXPOSED DUCTWORK, STRUCTURAL ELEMENTS, AND BOXES PNT-1 U.N.O. DUCTWORK TO RECEIVE PNT-1.                                                                                          |
| FIRST FLOOR - AREA G  |                    |                   |             |                                                        |                  |                                            |                   |                                                                                                                                                                                                                                                                                                              |
| 149                   | POOL LOBBY         | FT-1, G-3         | CB-3        | PNT-1, WC-2                                            | PNT-4            | ACT-2                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| A111                  | GYMNASIUM          | WD-1,2            | RB-2        | WP-1, PNT-1,2,3                                        | PNT-4            | ETR                                        | -                 | PROVIDE GAME LINES AS DETAILED ON A DRAWINGS. COLORS TO BE SELECTED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE. PAINT EXISTING GRAY BOXES PNT-1 U.N.O. DUCTWORK TO RECEIVE PNT-1.                                                                                                                           |
| SECOND FLOOR - AREA B |                    |                   |             |                                                        |                  |                                            |                   |                                                                                                                                                                                                                                                                                                              |
| 217                   | CORR.              | FT-6, G-3, TS-1   | CB-3        | PNT-1                                                  | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| 217A                  | T.R.               | FT-6, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| 217B                  | T.R.               | FT-6, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| 217C                  | T.R.               | FT-6, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| 217D                  | T.R.               | FT-6, G-3         | CB-1        | WT-5,6,7, TR-3,4, G-1, PNT-1                           | PNT-4            | ACT-1                                      | -                 |                                                                                                                                                                                                                                                                                                              |
| SECOND FLOOR - AREA F |                    |                   |             |                                                        |                  |                                            |                   |                                                                                                                                                                                                                                                                                                              |
| 101                   | VEST.              | CPT-1,2, TS-1     | RB-1        | PNT-1, PTM                                             | ETR              | ACT-2                                      | -                 | TERMINATE CARPET, CPT-1 AT STAIRS, STAIR TO REMAIN AS TERRAZZO. PROTECT CARPET TILE EDGE WITH TS-1.                                                                                                                                                                                                          |

| FINISH KEY               |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
|--------------------------|--------------------------------------------------------|-------------------------------|---------------------------------------------------------------------|-------------------------------------------------------|--------------------------------------|----------------------------------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ABBR.                    | MATERIAL TYPE                                          | MANUFACTURER                  | SERIES                                                              | SIZE                                                  | NUMBER                               | COLOR                                                    | SECTION #   | LOCATION/REMARKS                                                                                                                                                          |
| ACOUSTIC WALL TREATMENTS |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| AWP-1                    | FABRIC WRAPPED PET-CORE                                | CARNEGIE                      | XOREL ARTFORM / XOREL 6427                                          | 20" X 20" X 2"                                        | 2003                                 | METEOR                                                   | 09 84 30    | POOL WALLS                                                                                                                                                                |
| AWP-2                    | FABRIC WRAPPED PET-CORE                                | CARNEGIE                      | XOREL ARTFORM / XOREL 6149                                          | 20" X 20" X 2"                                        | 25                                   | NEBULA                                                   | 09 84 30    | POOL WALLS                                                                                                                                                                |
| CARPET                   |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| CPT-1                    | VINYL WALK OFF MAT                                     | FORBIO FLOORING SYSTEMS       | CORAL BRUSH TILES                                                   | 19.69" x 19.69"                                       | 5727                                 | STRATOS BLUE                                             | 09 68 13    | VESTIBULE                                                                                                                                                                 |
| CPT-2                    | WALK-OFF CARPET TILE                                   | INTERFACE                     | STEP REPEAT COLLECTION                                              | 19.69" x 19.69"                                       | SR799 - 104922                       | MIDNIGHT                                                 | 09 68 13    | ELEVATOR                                                                                                                                                                  |
| CEILING SYSTEM           |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| ACT-1                    | ACOUSTICAL CEILING TILE                                | ARMSTRONG WORLD INDUSTRIES    | ULTIMA                                                              | 24" x 24"                                             | 1910                                 | WHITE (WH)                                               | 09 51 00    | TOILET ROOMS, OFFICES, WET AREAS                                                                                                                                          |
| ACT-2                    | ACOUSTICAL CEILING TILE                                | ARMSTRONG WORLD INDUSTRIES    | CALLA HIGH NRC                                                      | 24" x 24"                                             | 2844                                 | WHITE (WH)                                               | 09 51 00    | GENERAL CEILING TILE                                                                                                                                                      |
| CERAMIC TRIM             |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| CB-1                     | COVE BASE                                              | DALTILE                       | COLOR WHEEL CLASSIC                                                 | 4" X 4"                                               | A3401                                | ARCTIC WHITE                                             | 09 30 00    | TOILET ROOM COVE BASE                                                                                                                                                     |
| CB-2                     | COVE CORNER RIGHT                                      | DALTILE - AMERICAN OLEAN      | COLOR STORY WALL                                                    | 6" X 6"                                               | SCR3601                              | SAPPHIRE SKY                                             | 09 30 00    | OUTSIDE RIGHT CORNERS OF CB-4                                                                                                                                             |
| CB-3                     | CERAMIC MOSAIC BUILD UP COVE BASE                      | DALTILE                       | KEYSTONES                                                           | 2" X 2" - 5" X 12" SHEET                              | MB5B                                 | NAVY SPECKLE                                             | 09 30 00    | POOL LOBBY ENTRANCE, LOCKER ROOM ENTRANCE, LOCKER ROOMS, OFFICES, AND TOILET ROOM PASSAGES - BUILD UP COVE BASE                                                           |
| CB-4                     | FLAT TOP COVE BASE                                     | DALTILE - AMERICAN OLEAN      | COLOR STORY WALL                                                    | 6" X 6"                                               | A3601                                | SAPPHIRE SKY                                             | 09 30 00    | GENERAL POOL COVE BASE                                                                                                                                                    |
| CB-5                     | COVE CORNER LEFT                                       | DALTILE - AMERICAN OLEAN      | COLOR STORY WALL                                                    | 6" X 6"                                               | SC13601                              | SAPPHIRE SKY                                             | 09 30 00    | OUTSIDE LEFT CORNERS OF CB-4                                                                                                                                              |
| CB-6                     | CERAMIC MOSAIC BUILD UP BASE                           | DALTILE                       | KEYSTONES                                                           | 2" X 2" - 5" X 12" SHEET                              | MB5A                                 | NAVY SPECKLE                                             | 09 30 00    | WHERE WALL TILE CONTINUES UP CONCRETE LOCKER BASE IN LOCKER ROOMS. WHERE SHOWER SURROUNDS MEET FLOOR TILE.                                                                |
| TR-1                     | TILE EDGE PROTECTION                                   | DALTILE                       | LUMINIQUE - JOLLY                                                   | 1/2" X 12"                                            | S1 / 212J                            | ARCTIC WHITE                                             | 09 30 00    | NATATORIUM - WALL TILE PATTERN AND EXPOSED TILE EDGES                                                                                                                     |
| TR-2                     | TILE EDGE PROTECTION                                   | DALTILE                       | COLOR WHEEL CLASSIC                                                 | 3" X 6" - BULLNOSE 3"                                 | S4639MOD                             | MUSTARD                                                  | 09 30 00    | POOL ALCOVES (SEATING) BULLNOSE TILE EDGE                                                                                                                                 |
| TR-3                     | TILE EDGE PROTECTION                                   | DALTILE - AMERICAN OLEAN      | COLOR STORY WALL                                                    | 4" X 4" - BULLNOSE                                    | S4449                                | SAPPHIRE SKY                                             | 09 30 00    | SINGLE USE TOILET ROOM BULLNOSE TILE                                                                                                                                      |
| TR-4                     | TILE EDGE PROTECTION                                   | DALTILE                       | COLOR WHEEL CLASSIC                                                 | 4" X 4" - BULLNOSE                                    | S4449                                | ARCTIC WHITE                                             | 09 30 00    | SINGLE USE TOILET ROOM BULLNOSE TILE                                                                                                                                      |
| FLOOR TILE               |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| FT-1                     | CERAMIC MOSAIC TILE                                    | DALTILE                       | KEYSTONES                                                           | 2" X 2"                                               | D209                                 | NAVY SPECKLE                                             | 09 30 00    | POOL DECK - GENERAL, POOL LOBBY FLOOR TILE                                                                                                                                |
| FT-2                     | CERAMIC MOSAIC TILE                                    | DALTILE                       | KEYSTONES                                                           | 2" X 2"                                               | D181                                 | MUSTARD                                                  | 09 30 00    | POOL DECK - LANE MARKERS, COMMENTING PLATFORM RISERS                                                                                                                      |
| FT-3                     | CERAMIC MOSAIC TILE                                    | DALTILE                       | KEYSTONES                                                           | 2" X 2"                                               | CUSTOM MIX                           | MUSTARD, NAVY SPECKLE, URBAN PUTTY SPECKLE               | 09 30 00    | POOL DECK - GENERAL, BORDER PATTERN AROUND DECK, REFER TO 1/A8.9. POOL LOBBY, POOL OFFICES, JANITOR'S CLOSET.                                                             |
| FT-4                     | CERAMIC MOSAIC TILE                                    | DALTILE                       | KEYSTONES                                                           | 1" X 1"                                               | D138                                 | GOLDEN GRANITE                                           | 09 30 00    | POOL DECK - DEPTH MARKER BORDER AROUND POOL - GENERAL, REFER TO 3/A8.2 ALT. #6 - POOL BASIN FINISH (GENERAL), POOL RAMP                                                   |
| FT-5                     | CERAMIC MOSAIC TILE                                    | DALTILE                       | KEYSTONES                                                           | 1" X 1"                                               | D209                                 | NAVY SPECKLE                                             | 09 30 00    | POOL DECK - DEPTH MARKER BORDER AROUND POOL - NUMBERING, REFER TO 3/A8.2 ALT. #6 - POOL BASIN FINISH (ACCENT - RACING LANES, TACING TARGET, AND 4" BREAK LINE), POOL RAMP |
| FT-6                     | CERAMIC MOSAIC TILE                                    | DALTILE                       | KEYSTONES                                                           | 2" X 2"                                               | CUSTOM MIX                           | WATERFALL, CORNSILK, MUSTARD, NAVY SPECKLE               | 09 30 00    | TOILET ROOM FLOOR PATTERN, REFER TO 2/A8.9                                                                                                                                |
| FT-7                     | CERAMIC MOSAIC TILE                                    | DALTILE                       | KEYSTONES                                                           | 2" X 2"                                               | CUSTOM MIX                           | GOLDEN GRANITE, NAVY SPECKLE, WATERFALL                  | 09 30 00    | LOCKER ROOM FLOOR PATTERN, REFER TO 3/A8.9                                                                                                                                |
| GROUT                    |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| G-1                      | PREMIXED GROUT                                         | MAPEI                         | ULTRACOLOR PLUS FA                                                  | -                                                     | 5093                                 | WARM GRAY                                                | 09 30 00    | NATATORIUM AND TOILET ROOM WALLS                                                                                                                                          |
| G-2                      | EPOXY GROUT                                            | MAPEI                         | KERAPOXY CQ                                                         | -                                                     | 5011                                 | SAHARA BEIGE                                             | 09 30 00    | NATATORIUM, OFFICES, AND JAN. FLOORS                                                                                                                                      |
| G-3                      | EPOXY GROUT                                            | MAPEI                         | KERAPOXY CQ                                                         | -                                                     | 5231                                 | DEEP OCEAN                                               | 09 30 00    | TOILET ROOM AND LOCKER ROOM FLOORS                                                                                                                                        |
| LOCKERS                  |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| LK-1                     | HDPE PLASTIC LOCKERS                                   | SCRANTON PRODUCTS             | DURALIFE LOCKERS                                                    | 15" X 15" X 60"                                       | -                                    | GREY                                                     | 10 51 26    | 1-TIER LOCKERS (LOCKER ROOMS)                                                                                                                                             |
| LK-2                     | HDPE PLASTIC LOCKERS                                   | SCRANTON PRODUCTS             | DURALIFE LOCKERS                                                    | 15" X 15" X 60"                                       | -                                    | GREY                                                     | 10 51 26    | 2-TIER LOCKERS (LOCKER ROOMS)                                                                                                                                             |
| PAINT                    |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| PNT-1                    | PAINT                                                  | SHERWIN WILLIAMS              | -                                                                   | -                                                     | SW 7006                              | EXTRA WHITE                                              | 09 91 23    | FIELD - GENERAL / RWB SOFFIT / CEILING / GYMNASIUM DUCT WORK                                                                                                              |
| PNT-2                    | PAINT                                                  | SHERWIN WILLIAMS              | -                                                                   | -                                                     | SW 6965                              | HYPER BLUE                                               | 09 91 23    | ACCENT                                                                                                                                                                    |
| PNT-3                    | PAINT                                                  | SHERWIN WILLIAMS              | -                                                                   | -                                                     | SW 6677                              | GOLDENROD                                                | 09 91 23    | ACCENT                                                                                                                                                                    |
| PNT-4                    | PAINT                                                  | SHERWIN WILLIAMS              | -                                                                   | -                                                     | SW 6258                              | TRICORN BLACK                                            | 09 91 23    | GENERAL HM DOOR FRAMES                                                                                                                                                    |
| PNT-5                    | HIGH PERFORMANCE EPOXY COATING                         | SHERWIN WILLIAMS              | PRO INDUSTRIAL WATER-BASED CATALYZED EPOXY                          | -                                                     | SW 7006                              | EXTRA WHITE                                              | 09 91 23    | GENERAL WALL AND CEILING PAINT IN POOL AND LOCKER ROOMS                                                                                                                   |
| PNT-6                    | HIGH PERFORMANCE EPOXY COATING                         | SHERWIN WILLIAMS              | PRO INDUSTRIAL WATER-BASED CATALYZED EPOXY                          | -                                                     | SW 6965                              | HYPER BLUE                                               | 09 91 23    | GENERAL RAILINGS IN POOL AREA, CORR (153) WALL PAINT                                                                                                                      |
| POOL LINER               |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| MC-1                     | MARCITE                                                | MARCITE                       | -                                                                   | -                                                     | -                                    | WHITE                                                    | 13 11 00    | POOL LINER                                                                                                                                                                |
| RESILIENT BASE           |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| RB-1                     | VINYL WALL BASE                                        | JOHNSONITE                    | TRADITIONAL VINYL WALL BASE 1/8" (TYPE TV)                          | 4" H                                                  | 40                                   | BLACK                                                    | 09 65 00    | GENERAL COVE WALL BASE                                                                                                                                                    |
| RB-2                     | RUBBER WALL BASE                                       | JOHNSONITE                    | VENT COVE                                                           | 4" H                                                  | 40                                   | BLACK                                                    | 09 64 30    | VENTILATED COVE BASE - GYMNASIUM AND MULTI-PURPOSE ROOM                                                                                                                   |
| RESIN PANEL (SIGNAGE)    |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| RP-1                     | DIGITALLY PRINTED RESIN PANEL                          | 3FORM                         | VARIA - DIGITAL PRINT LOGO WITH XT SUPPORTS                         | 4" X 6'-4" PANEL 1/2" THICK                           | LID - 112891                         | CLEAR - ARTWORK PROVIDED BY ARCHITECT                    | 10 11 43    | NATATORIUM - EAGLE LOGO PANEL                                                                                                                                             |
| RP-2                     | LASER CUT LETTERING                                    | 3FORM                         | CHROMA LASER CUT WITH TEMPLATE                                      | 10" H X 1/2" THICK                                    | -                                    | AS SELECTED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE  | 10 14 19    | NATATORIUM - ABOVE STUDENT SEATING ALCOVES (SIGNAGE TYPE 1)                                                                                                               |
| SEALED CONCRETE          |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| SC-1                     | SEALED CONCRETE                                        | SHERWIN WILLIAMS              | ARMORSEAL 8100                                                      | -                                                     | -                                    | CLEAR                                                    | 09 91 23    | STAIR (2A)                                                                                                                                                                |
| SOLID SURFACE            |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| SSM-1                    | SOLID SURFACE POLYMER RESIN                            | CORTERRA - NEO-METRO BY ACORN | -                                                                   | 4" X 8" X 1'-1/2"                                     | OCC19 - NEO-A036                     | COTTON TAIL                                              | 12 36 00    | LOCKER ROOM SINKS, NATATORIUM COMMENTING PLATFORM COUNTERTOP, WALL CAP, COLUMN CAP, WINDOW SILLS                                                                          |
| SSM-2                    | SOLID SURFACE SHOWER SURROUNDS                         | INPRO CORPORATION             | PRISM SOLID SURFACE SHOWER WALLS                                    | 36" x 36" x 96"                                       | AS SELECTED BY ARCHITECT             | AS SELECTED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE. | 10 28 19    | LOCKER ROOM SHOWERS                                                                                                                                                       |
| TERRAZZO                 |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| TZ-1                     | RESINOUS MATRIX TERRAZZO                               | T&M SUPPLY                    | -                                                                   | -                                                     | PTM                                  | PATCH TO MATCH                                           | 09 66 23    | TERRAZZO FLOORING - CORRIDORS, AREA D FIRST FLOOR, PATCH TO MATCH (CORR 163)                                                                                              |
| TERRAZZO BASE            |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| TZB-1                    | RESINOUS MATRIX TERRAZZO                               | T&M SUPPLY                    | -                                                                   | PRECAST                                               | PTM                                  | PATCH TO MATCH                                           | 09 66 23    | TERRAZZO BASE - CORRIDORS, AREA D FIRST FLOOR, PATCH TO MATCH (CORR 163)                                                                                                  |
| TOILET PARTITIONS        |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| TP-1                     | SOLID PLASTIC (HDPE) TOILET PARTITIONS                 | SCRANTON PRODUCTS             | AS SELECTED BY ARCHITECT                                            | -                                                     | -                                    | GREY                                                     | 10 21 13.19 | LOCKER ROOM TOILET COMPARTMENTS                                                                                                                                           |
| TRANSITION STRIPS        |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| TS-1                     | EDGE PROTECTION PROFILE                                | SCHLUTER SYSTEMS              | SCHENE                                                              | AS REQUIRED BY FLOORING THICKNESS AND ADA REGULATIONS | -                                    | BRUSHED NICKEL ANODIZED ALUMINUM                         | 09 30 00    | WHERE NEW FLOORING MEETS EXISTING FLOORING - EDGE PROTECTION PROFILE                                                                                                      |
| WALL COVERING            |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| WC-1                     | CUSTOM PRINTED VINYL WALLCOVERING                      | LEVEL                         | STIPPLE TYPE II VINYL WALLCOVERING                                  | -                                                     | CUSTOM: ARCHITECT TO PROVIDE ARTWORK | CUSTOM: ARCHITECT TO PROVIDE ARTWORK                     | 09 72 00    | POOL LOCKER ROOM ENTRANCE WALL COVERING                                                                                                                                   |
| WC-2                     | CUSTOM PRINTED VINYL WALLCOVERING                      | LEVEL                         | STIPPLE TYPE II VINYL WALLCOVERING                                  | 4" X 8"                                               | CUSTOM: ARCHITECT TO PROVIDE ARTWORK | CUSTOM: ARCHITECT TO PROVIDE ARTWORK                     | 09 72 00    | POOL ENTRANCE WALL COVERING                                                                                                                                               |
| WALL PADS                |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| WP-1                     | WALL MOUNTED PROTECTION PADS                           | DRAPER, INC                   | CLASS A FIRE RETARDANT WALL PADS                                    | VARIES - REFER TO INTERIOR ELEVATIONS                 | -                                    | ROYAL BLUE                                               | 11 66 23    | GYM VINYL WALL PADS                                                                                                                                                       |
| WALL TILE                |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| WT-1                     | LARGE FORMAT GLAZED WALL TILE                          | DALTILE                       | LUMINIQUE - HANDCRAFTED                                             | 12" X 24"                                             | 0190                                 | ARCTIC WHITE                                             | 09 30 00    | FIELD - GENERAL WALL TILE - POOL WALLS                                                                                                                                    |
| WT-2                     | LARGE FORMAT GLAZED WALL TILE                          | DALTILE                       | LUMINIQUE - FLUTED                                                  | 12" X 24"                                             | 0190                                 | ARCTIC WHITE                                             | 09 30 00    | FLUTED ACCENT WALL TILE - POOL WALLS                                                                                                                                      |
| WT-3                     | LARGE FORMAT GLAZED WALL TILE                          | DALTILE - AMERICAN OLEAN      | LUMINIQUE - HANDCRAFTED - MADE TO ORDER WITH COLOR STORY WALL GLAZE | 12" X 24"                                             | 0070                                 | SAPPHIRE SKY                                             | 09 30 00    | POOL WALL TILE - POOL WALLS                                                                                                                                               |
| WT-4                     | GLAZED CERAMIC WALL TILE                               | DALTILE                       | COLOR WHEEL CLASSIC                                                 | 3" X 6"                                               | 1012                                 | MUSTARD                                                  | 09 30 00    | ACCENT WALLS (SEATING)                                                                                                                                                    |
| WT-5                     | GLAZED CERAMIC WALL TILE                               | DALTILE                       | COLOR WHEEL CLASSIC                                                 | 4" X 4"                                               | 0190                                 | ARCTIC WHITE                                             | 09 30 00    | TOILET ROOMS (GENERAL)                                                                                                                                                    |
| WT-6                     | GLAZED CERAMIC WALL TILE                               | DALTILE - AMERICAN OLEAN      | COLOR STORY WALL                                                    | 4" X 4"                                               | 0070                                 | SAPPHIRE SKY                                             | 09 30 00    | TOILET ROOMS (ACCENT)                                                                                                                                                     |
| WT-7                     | GLAZED CERAMIC WALL TILE                               | DALTILE                       | COLOR WHEEL CLASSIC                                                 | 4" X 4"                                               | 1012                                 | MUSTARD                                                  | 09 30 00    | TOILET ROOMS (ACCENT)                                                                                                                                                     |
| WOOD STAIN               |                                                        |                               |                                                                     |                                                       |                                      |                                                          |             |                                                                                                                                                                           |
| STN-1                    | FACTORY FINISHED ITEMS TO RECEIVE STAIN TO MATCH STN-1 | MINWAX                        | -                                                                   | -                                                     | STAIN TO MATCH MW 455                | PINE RIDGE                                               | 09 91 23    | GLU-LAM BEAMS, LOCKER ROOM BENCHES, FACTORY FINISH TO MATCH STN-1                                                                                                         |
| WD-1                     | GYMNASIUM WOOD FLOOR REFINISHING                       | DURASEAL                      | -                                                                   | -                                                     | STAIN TO MATCH MW 455                | PINE RIDGE                                               | 09 64 30    | REFINISHING EXISTING WOOD ATHLETIC FLOORING (GENERAL STAIN)                                                                                                               |
| WD-2                     | GYMNASIUM WOOD FLOOR REFINISHING                       | DURASEAL                      | -                                                                   | -                                                     | STAIN TO MATCH MW 443                | HEDGEWOOD                                                | 09 64 30    | REFINISHING EXISTING WOOD ATHLETIC FLOORING (ACCENT STAIN) - HS GYM                                                                                                       |

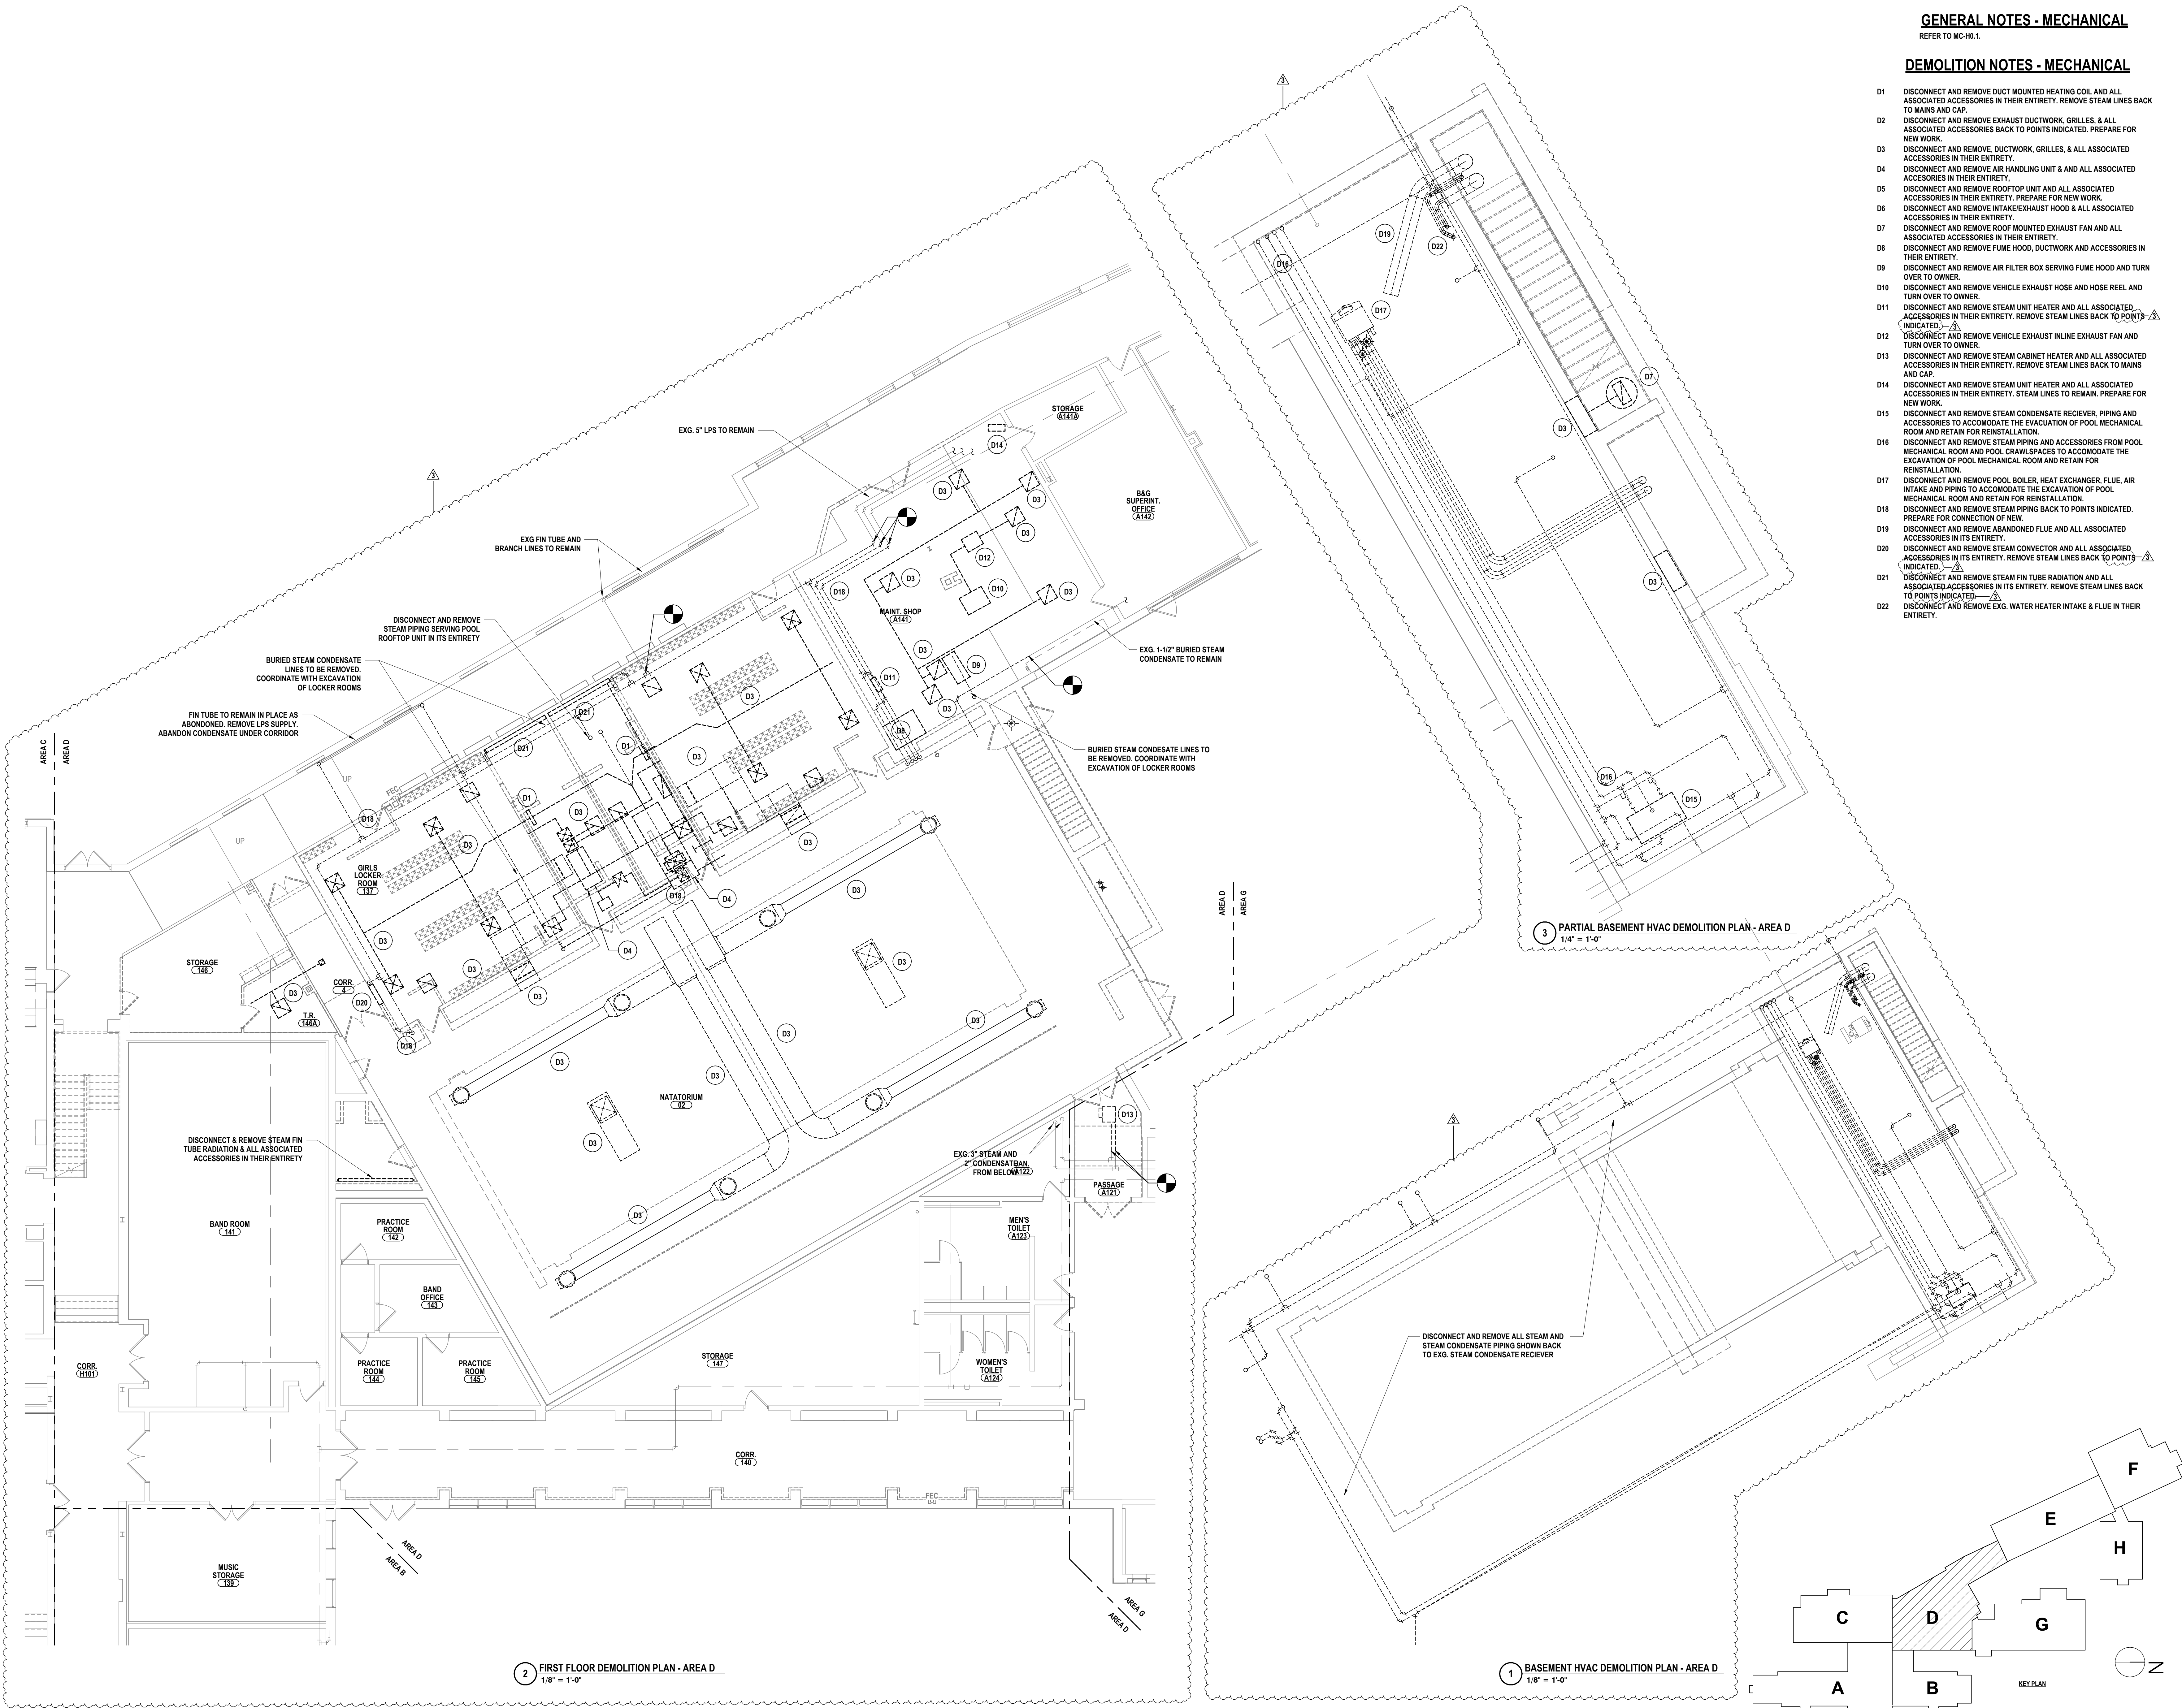

GENERAL NOTES - MECHANICAL

REFER TO MC-H0.1.

DEMOLITION NOTES - MECHANICAL

- D1 DISCONNECT AND REMOVE DUCT MOUNTED HEATING COIL AND ALL ASSOCIATED ACCESSORIES IN THEIR ENTIRETY. REMOVE STEAM LINES BACK TO MAINS AND CAP.
- D2 DISCONNECT AND REMOVE EXHAUST DUCTWORK, GRILLES, & ALL ASSOCIATED ACCESSORIES BACK TO POINTS INDICATED. PREPARE FOR NEW WORK.
- D3 DISCONNECT AND REMOVE DUCTWORK, GRILLES, & ALL ASSOCIATED ACCESSORIES IN THEIR ENTIRETY.
- D4 DISCONNECT AND REMOVE AIR HANDLING UNIT & AND ALL ASSOCIATED ACCESSORIES IN THEIR ENTIRETY. PREPARE FOR NEW WORK.
- D5 DISCONNECT AND REMOVE ROOF TOP UNIT AND ALL ASSOCIATED ACCESSORIES IN THEIR ENTIRETY. PREPARE FOR NEW WORK.
- D6 DISCONNECT AND REMOVE INTAKE/EXHAUST HOOD & ALL ASSOCIATED ACCESSORIES IN THEIR ENTIRETY.
- D7 DISCONNECT AND REMOVE ROOF MOUNTED EXHAUST FAN AND ALL ASSOCIATED ACCESSORIES IN THEIR ENTIRETY.
- D8 DISCONNECT AND REMOVE FUME HOOD, DUCTWORK AND ACCESSORIES IN THEIR ENTIRETY.
- D9 DISCONNECT AND REMOVE AIR FILTER BOX SERVING FUME HOOD AND TURN OVER TO OWNER.
- D10 DISCONNECT AND REMOVE VEHICLE EXHAUST HOSE AND HOSE REEL AND TURN OVER TO OWNER.
- D11 DISCONNECT AND REMOVE STEAM UNIT HEATER AND ALL ASSOCIATED ACCESSORIES IN THEIR ENTIRETY. REMOVE STEAM LINES BACK TO POINTS INDICATED.
- D12 DISCONNECT AND REMOVE VEHICLE EXHAUST INLINE EXHAUST FAN AND TURN OVER TO OWNER.
- D13 DISCONNECT AND REMOVE STEAM CABINET HEATER AND ALL ASSOCIATED ACCESSORIES IN THEIR ENTIRETY. REMOVE STEAM LINES BACK TO MAINS AND CAP.
- D14 DISCONNECT AND REMOVE STEAM UNIT HEATER AND ALL ASSOCIATED ACCESSORIES IN THEIR ENTIRETY. STEAM LINES TO REMAIN. PREPARE FOR NEW WORK.
- D15 DISCONNECT AND REMOVE STEAM CONDENSATE RECEIVER, PIPING AND ACCESSORIES TO ACCOMMODATE THE EVACUATION OF POOL MECHANICAL ROOM AND RETAIN FOR REINSTALLATION.
- D16 DISCONNECT AND REMOVE STEAM PIPING AND ACCESSORIES FROM POOL MECHANICAL ROOM AND POOL CRAWLSPACES TO ACCOMMODATE THE EXCAVATION OF POOL MECHANICAL ROOM AND RETAIN FOR REINSTALLATION.
- D17 DISCONNECT AND REMOVE POOL BOILER, HEAT EXCHANGER, FLUE, AIR INTAKE AND PIPING TO ACCOMMODATE THE EXCAVATION OF POOL MECHANICAL ROOM AND RETAIN FOR REINSTALLATION.
- D18 DISCONNECT AND REMOVE STEAM PIPING BACK TO POINTS INDICATED. PREPARE FOR CONNECTION OF NEW.
- D19 DISCONNECT AND REMOVE ABANDONED FLUE AND ALL ASSOCIATED ACCESSORIES IN ITS ENTIRETY.
- D20 DISCONNECT AND REMOVE STEAM CONVECTOR AND ALL ASSOCIATED ACCESSORIES IN ITS ENTIRETY. REMOVE STEAM LINES BACK TO POINTS INDICATED.
- D21 DISCONNECT AND REMOVE STEAM FIN TUBE RADIATION AND ALL ASSOCIATED ACCESSORIES IN ITS ENTIRETY. REMOVE STEAM LINES BACK TO POINTS INDICATED.
- D22 DISCONNECT AND REMOVE EXG. WATER HEATER INTAKE & FLUE IN THEIR ENTIRETY.

|                  |                  |
|------------------|------------------|
| DRAWN BY: KMM    |                  |
| CHECKED BY: KEO  |                  |
| DATE: 04/07/2026 |                  |
| PHASE: CD        |                  |
| #                | REVISION:        |
|                  | ISSUED FOR AD #5 |
| 3                | DATE: 07/20/2026 |

IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER'S ARCHITECT'S OR SURVEYOR'S SEAL.

HUNT ENGINEERS | ARCHITECTS | SURVEYORS

ALBANY, NY - BINGHAMTON, NY - HORSESHOE FALLS, NY - ROCHESTER, NY  
HUNTSVILLE, AL - KANSAS CITY, MO - NEW YORK, NY  
WWW.HUNT-EAS.COM 807-358-1000  
NY CERTIFICATE NO. 0016320 PA CERTIFICATE NO. TSC2202313464-1

FIRST FLOOR DEMOLITION PLAN - AREA D

2025 CAPITAL PROJECT  
ALFRED-ALMOND CSD

6795 ROUTE 21, ALMOND, NY 14804

SECT MC: 02-01-04-001-007

MC-H0.2

PROJECT NO: 2028-059

|   |            |                  |
|---|------------|------------------|
| # | DATE:      | REVISION:        |
| 3 | 07/20/2026 | ISSUED FOR AD #5 |

"IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED PIONEERS, ARCHITECT'S OR SURVEYOR'S SEAL."

FIRST FLOOR NEW WORK PLAN - AREA D

---

2025 CAPITAL PROJECT  
ALFRED-ALMOND CSD  
6755 ROUTE 21, ALMOND, NY 14804

| ROOFTOP UNIT SCHEDULE |                                         |          |           |        |            |           |      |        |             |           |      |       |      |                 |                |                |                |                 |           |        |             |                 |        |                  |     |            |                    |                    |                 |          |                    |       |        |       |     |                         |
|-----------------------|-----------------------------------------|----------|-----------|--------|------------|-----------|------|--------|-------------|-----------|------|-------|------|-----------------|----------------|----------------|----------------|-----------------|-----------|--------|-------------|-----------------|--------|------------------|-----|------------|--------------------|--------------------|-----------------|----------|--------------------|-------|--------|-------|-----|-------------------------|
| UNIT NUMBER           | MANUFACTURER/MODEL NO.                  | LOCATION | TOTAL CFM | OA CFM | SUPPLY FAN |           |      |        | EXHAUST FAN |           |      |       | SEER | DX COOLING COIL |                |                |                | HEATING SECTION |           |        |             | ENERGY RECOVERY |        |                  |     | ELECTRICAL |                    |                    |                 | NOTES    |                    |       |        |       |     |                         |
|                       |                                         | SHEET    |           |        | EXT.SP(°)  | TOT.SP(°) | RPM  | HP     | EXT.SP(°)   | TOT.SP(°) | RPM  | HP    |      | EAT DB (DEG F)  | EAT WB (DEG F) | LAT DB (DEG F) | LAT WB (DEG F) | MBH SEN         | MBH TOTAL | REFRIG | HEAT SOURCE | EAT DB          | LAT DB | TOTAL MBH OUTPUT | GPM | EWT        | SUMMER EAT (DB/WB) | SUMMER LAT (DB/WB) | WINTER EAT (DB) |          | WINTER LAT (DB/WB) | VOLTS | PHASE  | FLA   | MCA | MOP                     |
| RTU-1                 | INNOVENT<br>NDHJLQJL-18000-AC-ST-HG-460 | MC-H1.7  | 16400     | 9000   | 1.5        | 4.57      | 2022 | 10 x 2 | 1           | 2.52      | 2431 | 5 x 2 |      | 81.1            | 72.5           | 59.2           | 59.1           | 189.1           | 373.2     | R-454B | STEAM       | 74.8            | 108    | 588.3            | -   | -          | 79.772.1           | 81.172.5           | 0               | 56.237.2 | 460                | 3     | -      | 111.5 | 125 | 2,3,4,5,6,7,8,9,10      |
| RTU-2                 | AAON RNA-913-B-A-3                      | MC-H1.7  | 3000      | 1060   | 1.25       | 2.37      | 1325 | 3 x 1  | 0.25        | 0.7       | 1002 | 2 x 1 |      | 76.1            | 62.9           | 50.4           | 48.9           | 85.6            | 112.8     | R-454B | HEAT PUMP   | 62.4            | 94.8   | 119.1            | -   | -          | 91/73              | 75.962.8           | 0               | 63.947.7 | 460                | 3     | 58.0 A | 71    | 80  | 1,2,3,4,5,6,7,8,9,10,11 |
| RTU-3                 | AAON RNA-918-C-A-3-GJB0A                | MC-H1.9  | 7500      | 3000   | 2.00       | 3.45      | 1760 | 10     | 1.00        | 1.77      | 1760 | 7.5   |      | 76.0            | 62.9           | 54.6           | 53.0           | 190.3           | 227.8     | R-454B | HEAT PUMP   | 64.7            | 75.0   | 91.5             |     |            | 89/73              | 77.464.2           | 0               | 56.845.4 | 460                | 3     | 59.0 A | 62    | 70  | 2,3,4,5,6,7,8,9,10,11   |
| RTU-4                 | AAON RNA-918-C-A-3-GJB0A                | MC-H1.9  | 7500      | 3000   | 2.00       | 3.45      | 1760 | 10     | 1.00        | 1.77      | 1760 | 7.5   |      | 76.0            | 62.9           | 54.6           | 53.0           | 190.3           | 227.8     | R-454B | HEAT PUMP   | 64.7            | 75.0   | 91.5             |     |            | 89/73              | 77.464.2           | 0               | 56.845.4 | 460                | 3     | 59.0 A | 62    | 70  | 2,3,4,5,6,7,8,9,10,11   |

- NOTES:
1. PROVIDE AUXILIARY ELECTRIC HEATING COIL WITH FULL BACKUP HEAT.
  2. PROVIDE HOT GAS REHEAT
  3. START/STOP BY DDC.
  4. PROVIDE FACTORY WIRED DISCONNECT.
  5. PROVIDE WITH SINGLE POINT POWER CONNECTION.
  6. PROVIDE BACKDRAFT DAMPER ON EXHAUST AIR AND MOTORIZED INTAKE DAMPER ON OUTSIDE AIR AND RETURN AIR.
  7. PROVIDE EXHAUST AND OUTSIDE AIR HOODS.
  8. PROVIDE FANS WITH FACTORY MOUNTED VFD'S.
  9. PROVIDE FACTORY FABRICATED INSULATED 18" HIGH WIND RATED ROOF CURB.
  10. PROVIDE BAGNET CONNECTION.
  11. PROVIDE COIL DETECTORS FOR DCV CONTROL.

| UNIT HEATER SCHEDULE |          |           |                   |     |         |            |       |         |                            |       |  |  |
|----------------------|----------|-----------|-------------------|-----|---------|------------|-------|---------|----------------------------|-------|--|--|
| UNIT #               | LOCATION |           | HEATING COIL DATA |     |         | ELECTRICAL |       |         | MANUFACTURE & MODEL #      | NOTES |  |  |
|                      | SHEET    | ROOM      | CFM               | EAT | CAP MBH | AMPS       | VOLTS | PHASE Ø |                            |       |  |  |
| UH-1                 | MC-H1.1  | T.R. 133D | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-2                 | MC-H1.1  | T.R. 133C | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-3                 | MC-H1.1  | T.R. 133B | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-4                 | MC-H1.1  | T.R. 133A | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-5                 | MC-H1.2  | A141      | 560               | 21  | 0.96    | 120 V      | 1     |         | REZNOR UWS WITH STEAM COIL | 1,2   |  |  |
| UH-6                 | MC-H1.5  | T.R. 217D | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-7                 | MC-H1.5  | T.R. 217C | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-8                 | MC-H1.5  | T.R. 217B | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-9                 | MC-H1.5  | T.R. 217A | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-10                | MC-H1.4  | T.R. 024A | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-11                | MC-H1.4  | T.R. 024B | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-12                | MC-H1.4  | T.R. 024C | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-13                | MC-H1.7  | T.R. 051A | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-14                | MC-H1.7  | T.R. 051B | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-15                | MC-H1.7  | T.R. 051C | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |
| UH-16                | MC-H1.4  | VESTIBULE | 425               | 68  | 10.2    | 10.8       | 277 V | 1       | TRANE UHCA-031C8A          | 1,2,3 |  |  |

- NOTES:
1. UNIT SHALL BE FURNISHED WITH DISCONNECT.
  2. PROVIDE LOW FLA ECM MOTOR.
  3. PROVIDE RECESSED TRIM KIT.

| FAN SCHEDULE |          |           |     |      |            |       |         |       |       |                       |                |           |
|--------------|----------|-----------|-----|------|------------|-------|---------|-------|-------|-----------------------|----------------|-----------|
| FAN #        | LOCATION |           | CFM | RPM  | ELECTRICAL |       |         |       | DRIVE | MANUFACTURE & MODEL # | NOTES          |           |
|              | SHEET    | ROOM      |     |      | HP         | VOLTS | PHASE Ø | SONES |       |                       |                | SP        |
| EF-1         | MC-H1.5  | ROOF      | 700 | 1725 | 1/6        | 115 V | 1       | 9.5   | .5    | DIRECT                | COOK ACE-D VFD | 1,2,3,4,5 |
| EF-2         | MC-H1.7  | ROOF      | 225 | 1050 | 1/25       | 115 V | 1       | 6.3   | .307  | DIRECT                | COOK ACE-D     | 1,2,3,4,5 |
| EF-3         | MC-H1.7  | ROOF      | 300 | 1050 | 1/25       | 115 V | 1       | 6.6   | .246  | DIRECT                | COOK ACE-D     | 1,2,3,4,5 |
| EF-4         | MC-H1.7  | ROOF      | 400 | 1140 | 1/6        | 115 V | 1       | 5.3   | .306  | DIRECT                | COOK ACE-D     | 1,3,4,5   |
| EF-5         | MC-H1.4  | T.R. 024B | 225 | 1100 | 1/6        | 115 V | 1       | 5.5   | .316  | DIRECT                | COOK GEMINI    | 1,3,5     |
| EF-6         | MC-H1.6  | T.R. 051B | 225 | 1100 | 1/6        | 115 V | 1       | 5.5   | .316  | DIRECT                | COOK GEMINI    | 1,3,5     |












- NOTES:
1. PROVIDE FACTORY MOUNTED MOUNTED AND WIRED DISCONNECT.
  2. PROVIDE MOTORIZED BACKDRAFT DAMPER.
  3. PROVIDE WITH ECM MOTOR.
  4. PROVIDE 18" HIGH WIND RATED CURB.
  5. START/STOP BY DDC.

| DUCT MOUNTED HEATING COIL SCHEDULE - STEAM |                 |               |      |         |             |         |              |                   |                     |              |                 |
|--------------------------------------------|-----------------|---------------|------|---------|-------------|---------|--------------|-------------------|---------------------|--------------|-----------------|
| UNIT #                                     | AIR SIDE UNIT # | FACE SIZE LxH | CFM  | CAP MBH | ENT AIR (F) | LAT (F) | MAX. APD (°) | STEAM CAP. (LB/H) | ENT. STEAM TEMP (F) | PRESS. (PSI) | REMARKS & NOTES |
| DHC-1                                      | RTU-3           | 39"x38"       | 7500 | 236.6   | 67.5        | 96.6    | 0.17         | 245.5             | 227                 | 5            | CAPITAL COIL    |
| DHC-2                                      | RTU-4           | 39"x38"       | 7500 | 236.6   | 67.5        | 96.6    | 0.17         | 245.5             | 227                 | 5            | CAPITAL COIL    |


| REGISTER & GRILLE SCHEDULE |          |            |                  |         |        |      |            |  |  |
|----------------------------|----------|------------|------------------|---------|--------|------|------------|--|--|
| UNIT                       | FUNCTION | MODEL      | FACE / NECK SIZE | CFM     | MAX SP | N.C. | BORDER     |  |  |
| D-1                        | SUPPLY   | PRICE SCD4 | 24"x24"/8"       | 175     | 0.05   | <20  | LAY-IN     |  |  |
| D-2                        | SUPPLY   | PRICE HCD  | 6"x6"            | VARRIES | 0.05   | <20  | DUCT-MOUNT |  |  |
| D-3                        | SUPPLY   | PRICE HCD  | 24"Wx19"H        | 150     | 0.05   | <20  | DUCT-MOUNT |  |  |
| R-1                        | RETURN   | PRICE R5   | 24"x24"          | VARRIES | 0.05   | <20  | LAY-IN     |  |  |
| R-2                        | RETURN   | PRICE 600  | 12"x6"           | VARRIES | 0.05   | <20  | DUCT-MOUNT |  |  |
| R-3                        | RETURN   | PRICE 500  | 40"Wx24"H        | 3200    | 0.05   | <20  | WALL-MOUNT |  |  |

| BOILER SCHEDULE |                  |                         |              |                  |           |            |       |     |         |
|-----------------|------------------|-------------------------|--------------|------------------|-----------|------------|-------|-----|---------|
| UNIT NUMBER     | LOCATION         | MANUFACTURER & MODEL #  | HEATING DATA |                  | FLUE SIZE | ELECTRICAL |       |     | NOTES   |
|                 |                  |                         | INPUT MBH    | GROSS OUTPUT MBH |           | VOLTS      | PHASE | FLA |         |
| B-1             | POOL FILTER ROOM | LOCHINVAR AQUAS APX800N | 800          | 776              | 6"        | 120 V      | 1     | 4.3 | 1,2,3,4 |

- NOTES:
1. E.C. TO PROVIDE SEPERATE 15A CIRCUIT FOR EACH BOILER.
  2. PROVIDE NEUTRALIZATION KIT & ROUTE CONDENSATE TO NEAREST FLOOR DRAIN.
  3. DESIGN MAKE BASED UPON POOL WATER HEATING SKID: BOILER PUMP TITANIUM HEAT EXCHANGER, PIPING, & ALL ACCESSORIES.
  4. OPERATION OF CIRCULATING PUMP TIED TO BOILER.

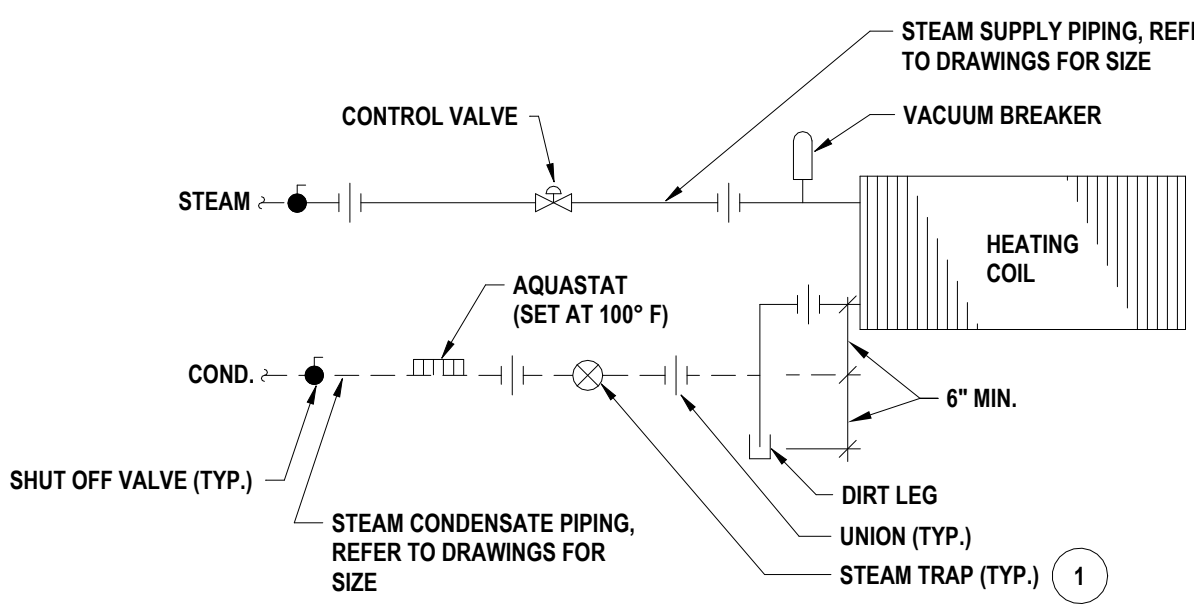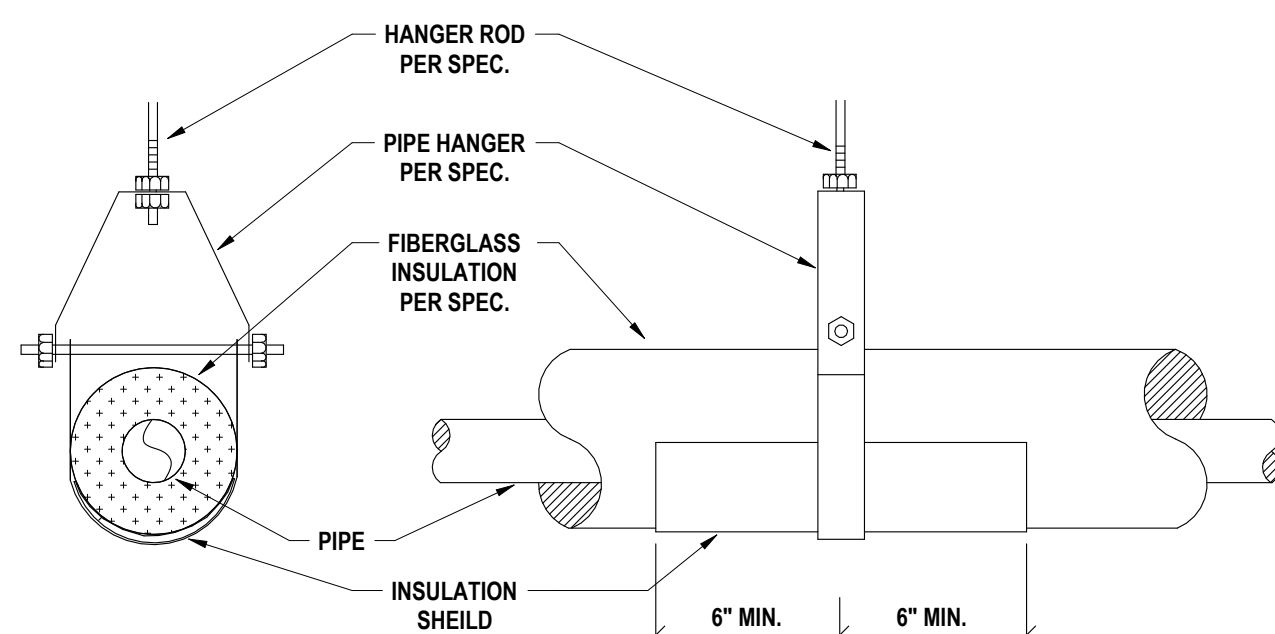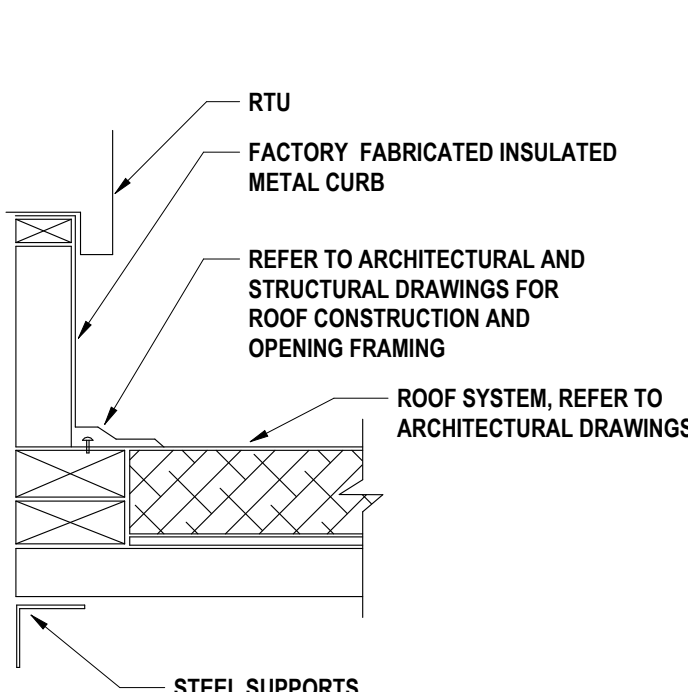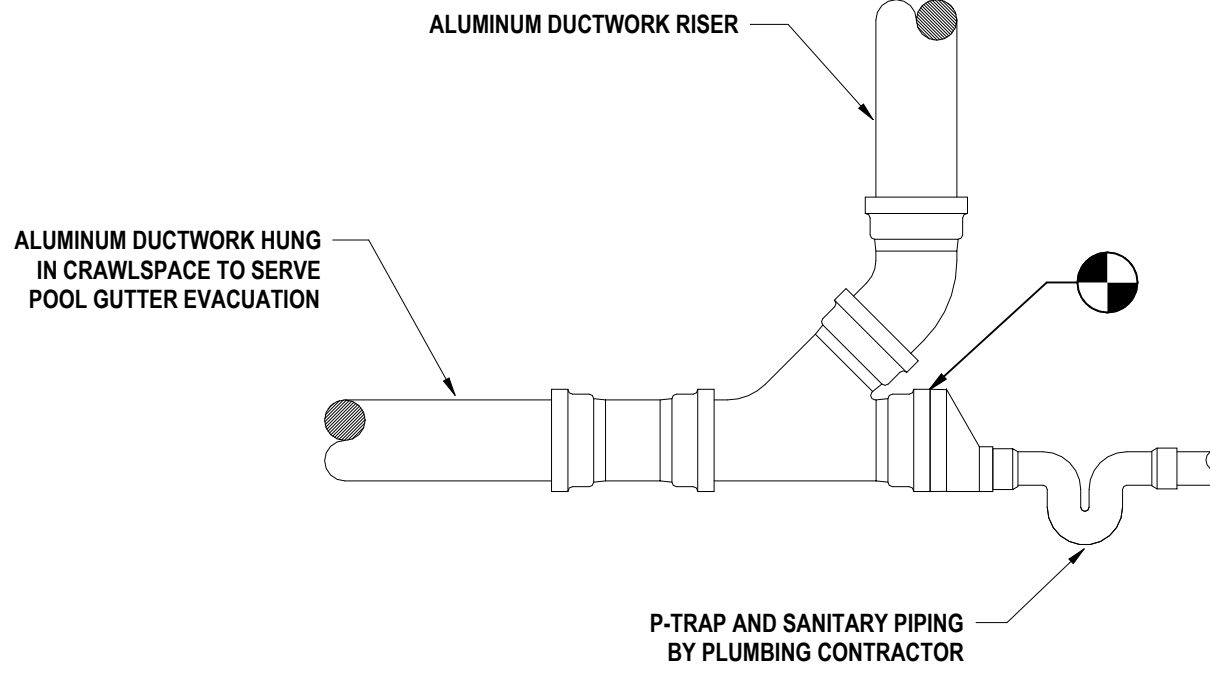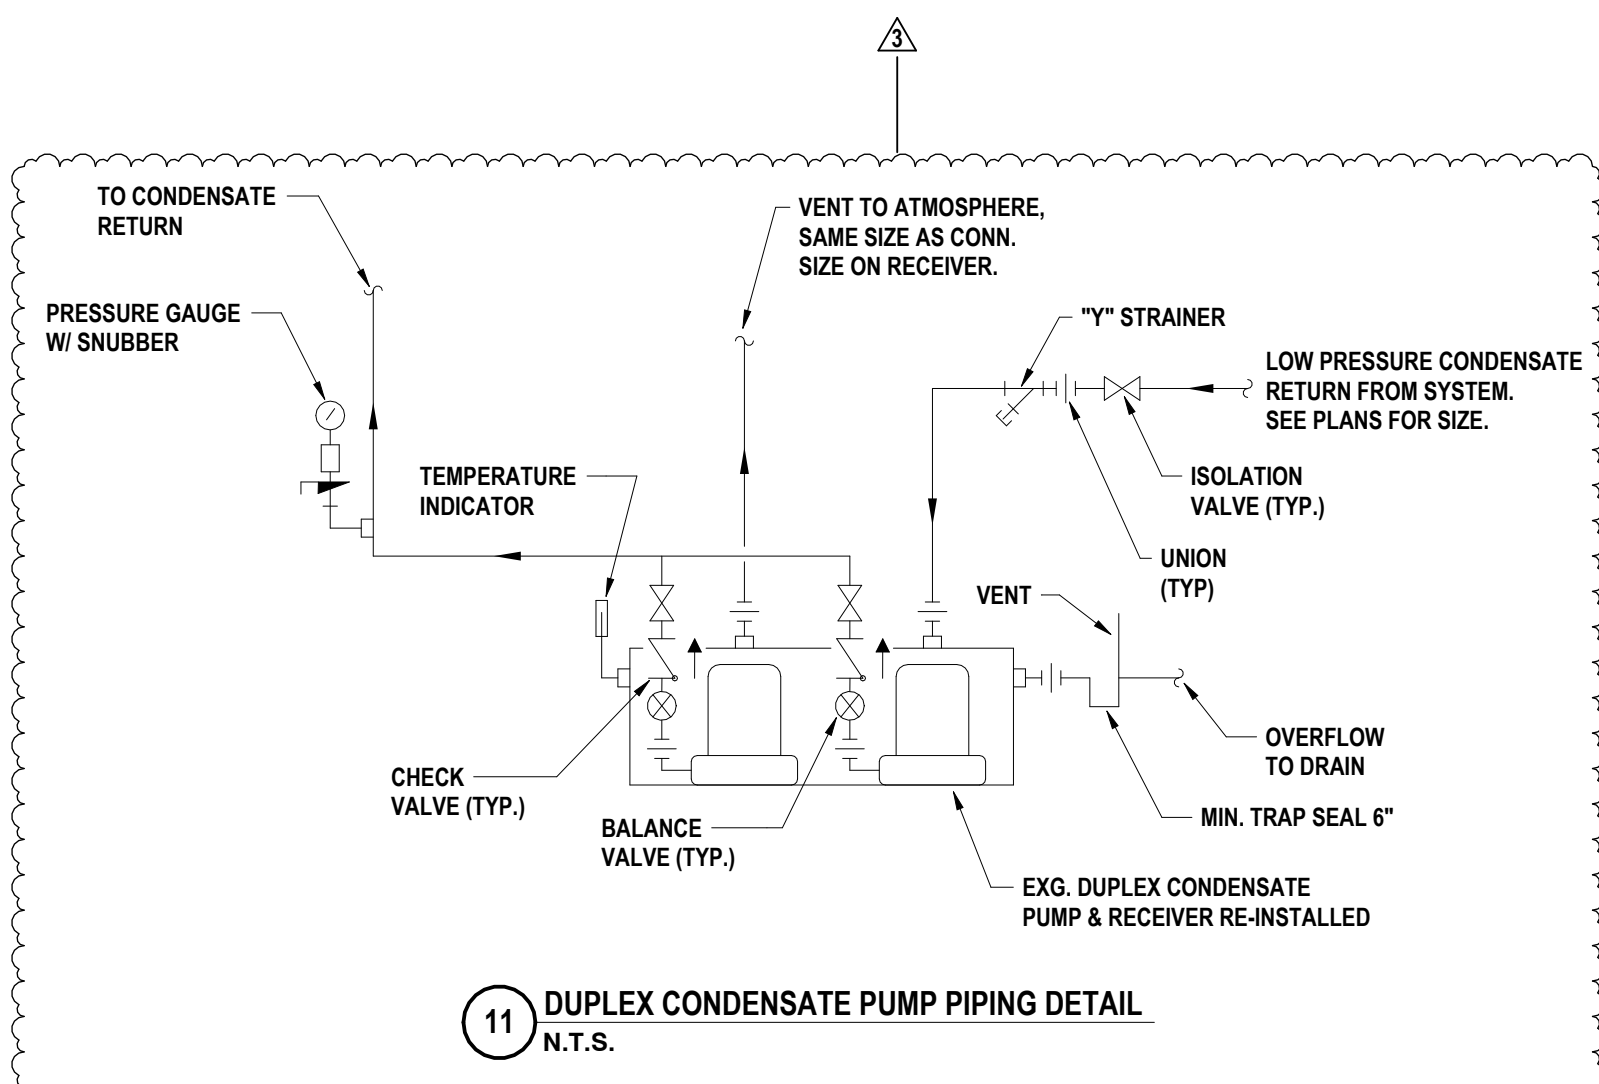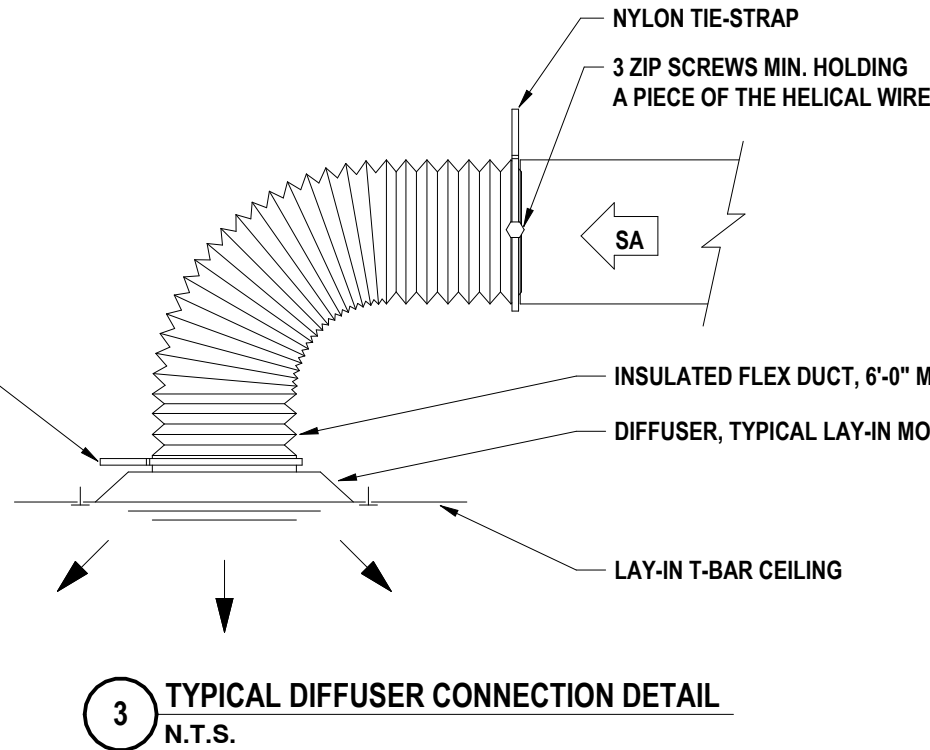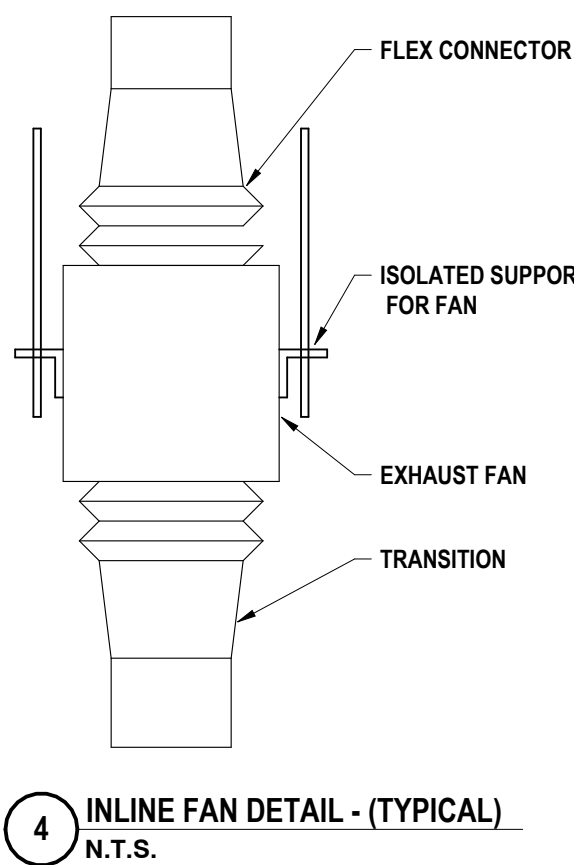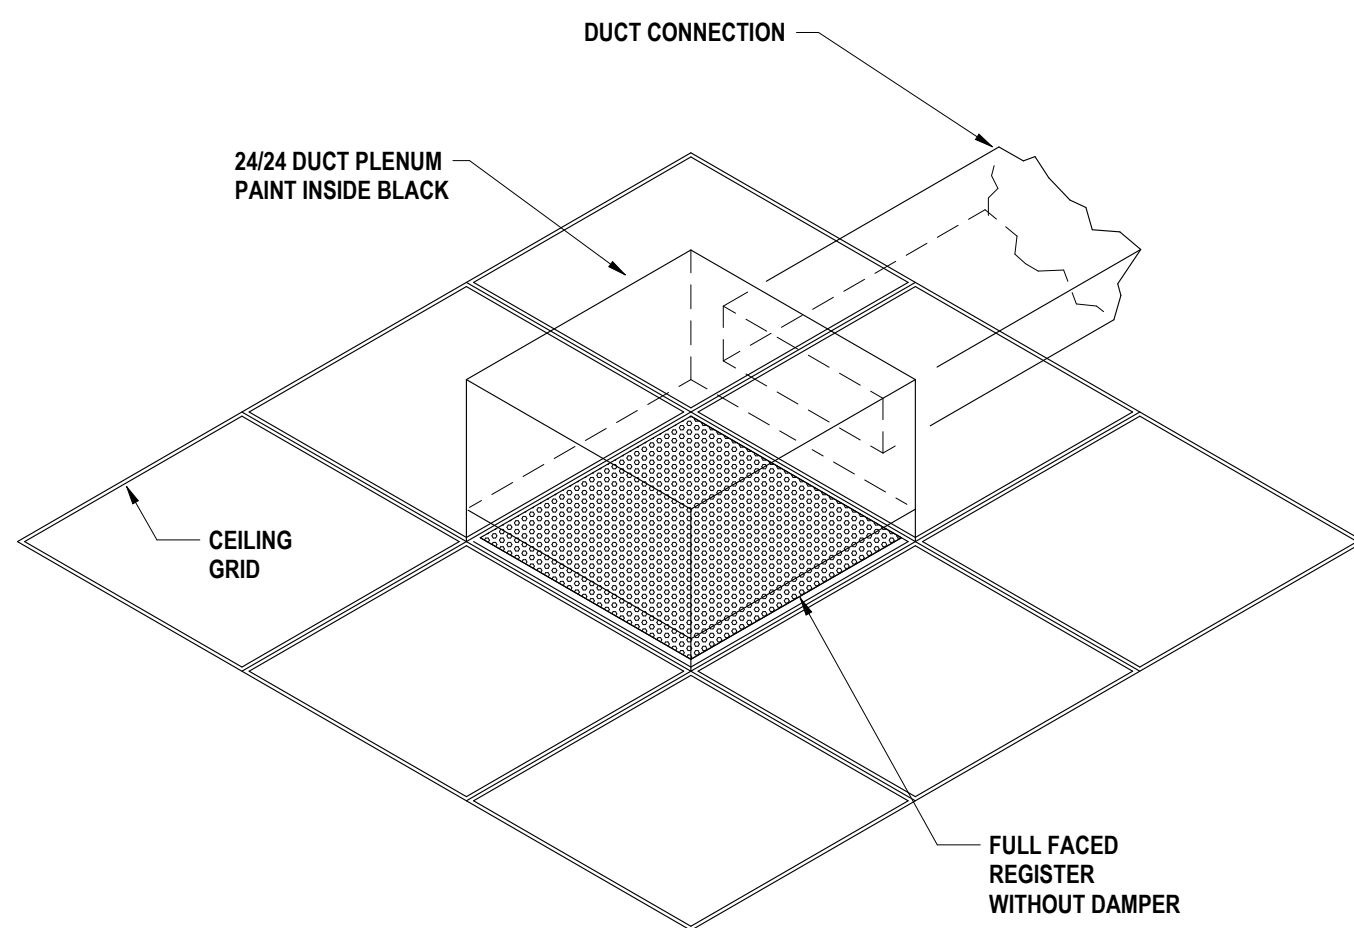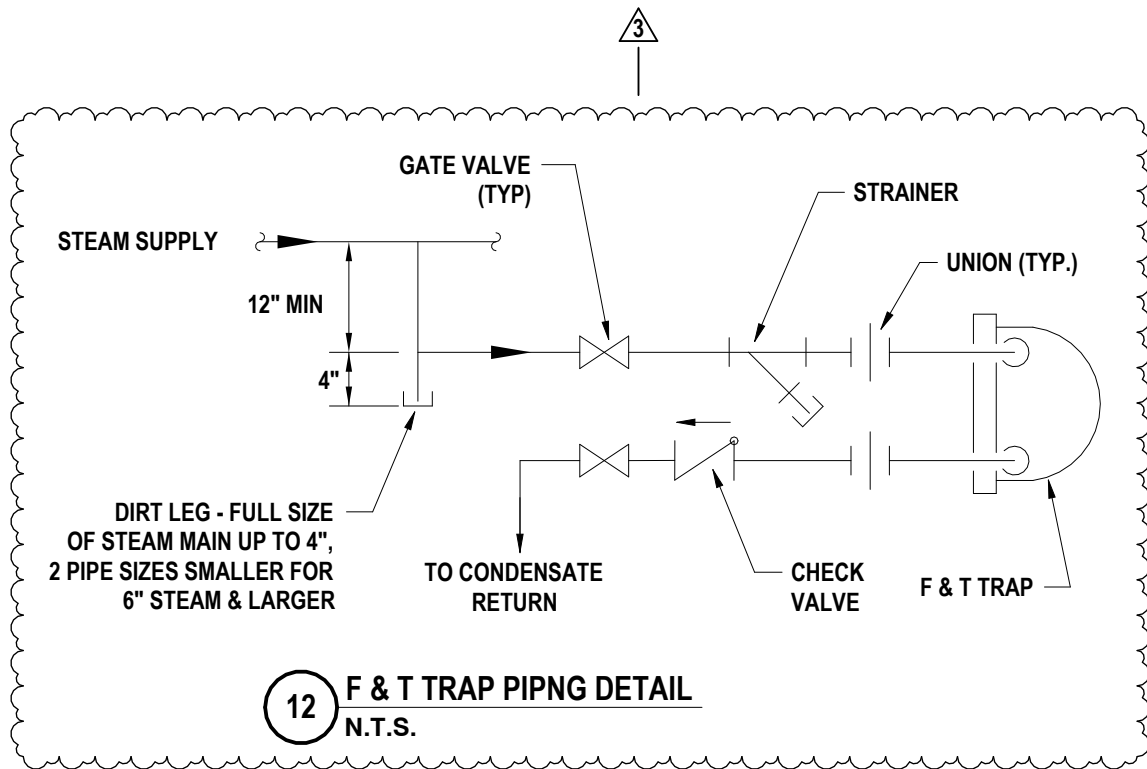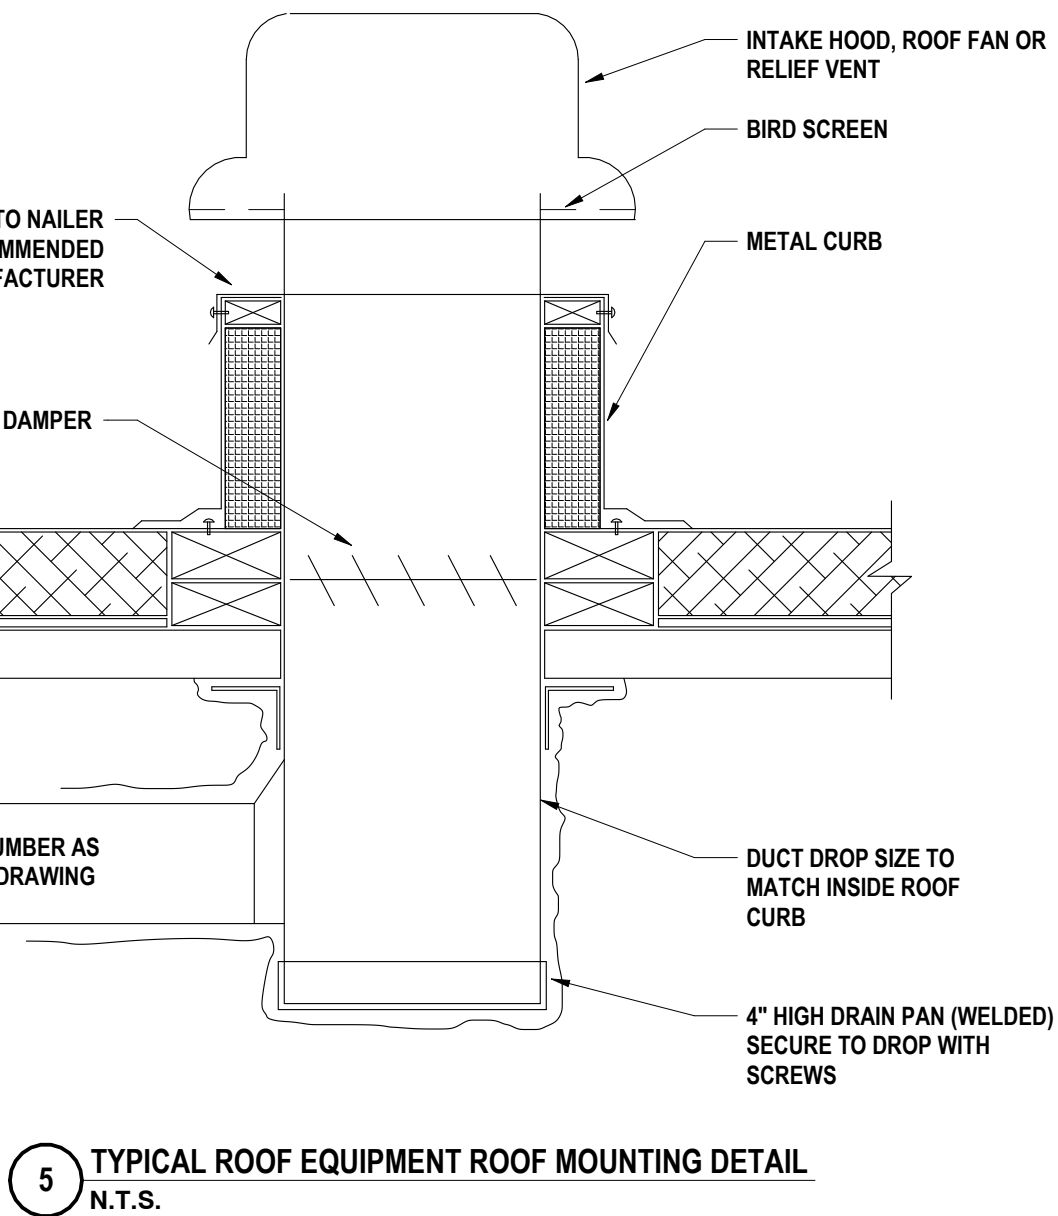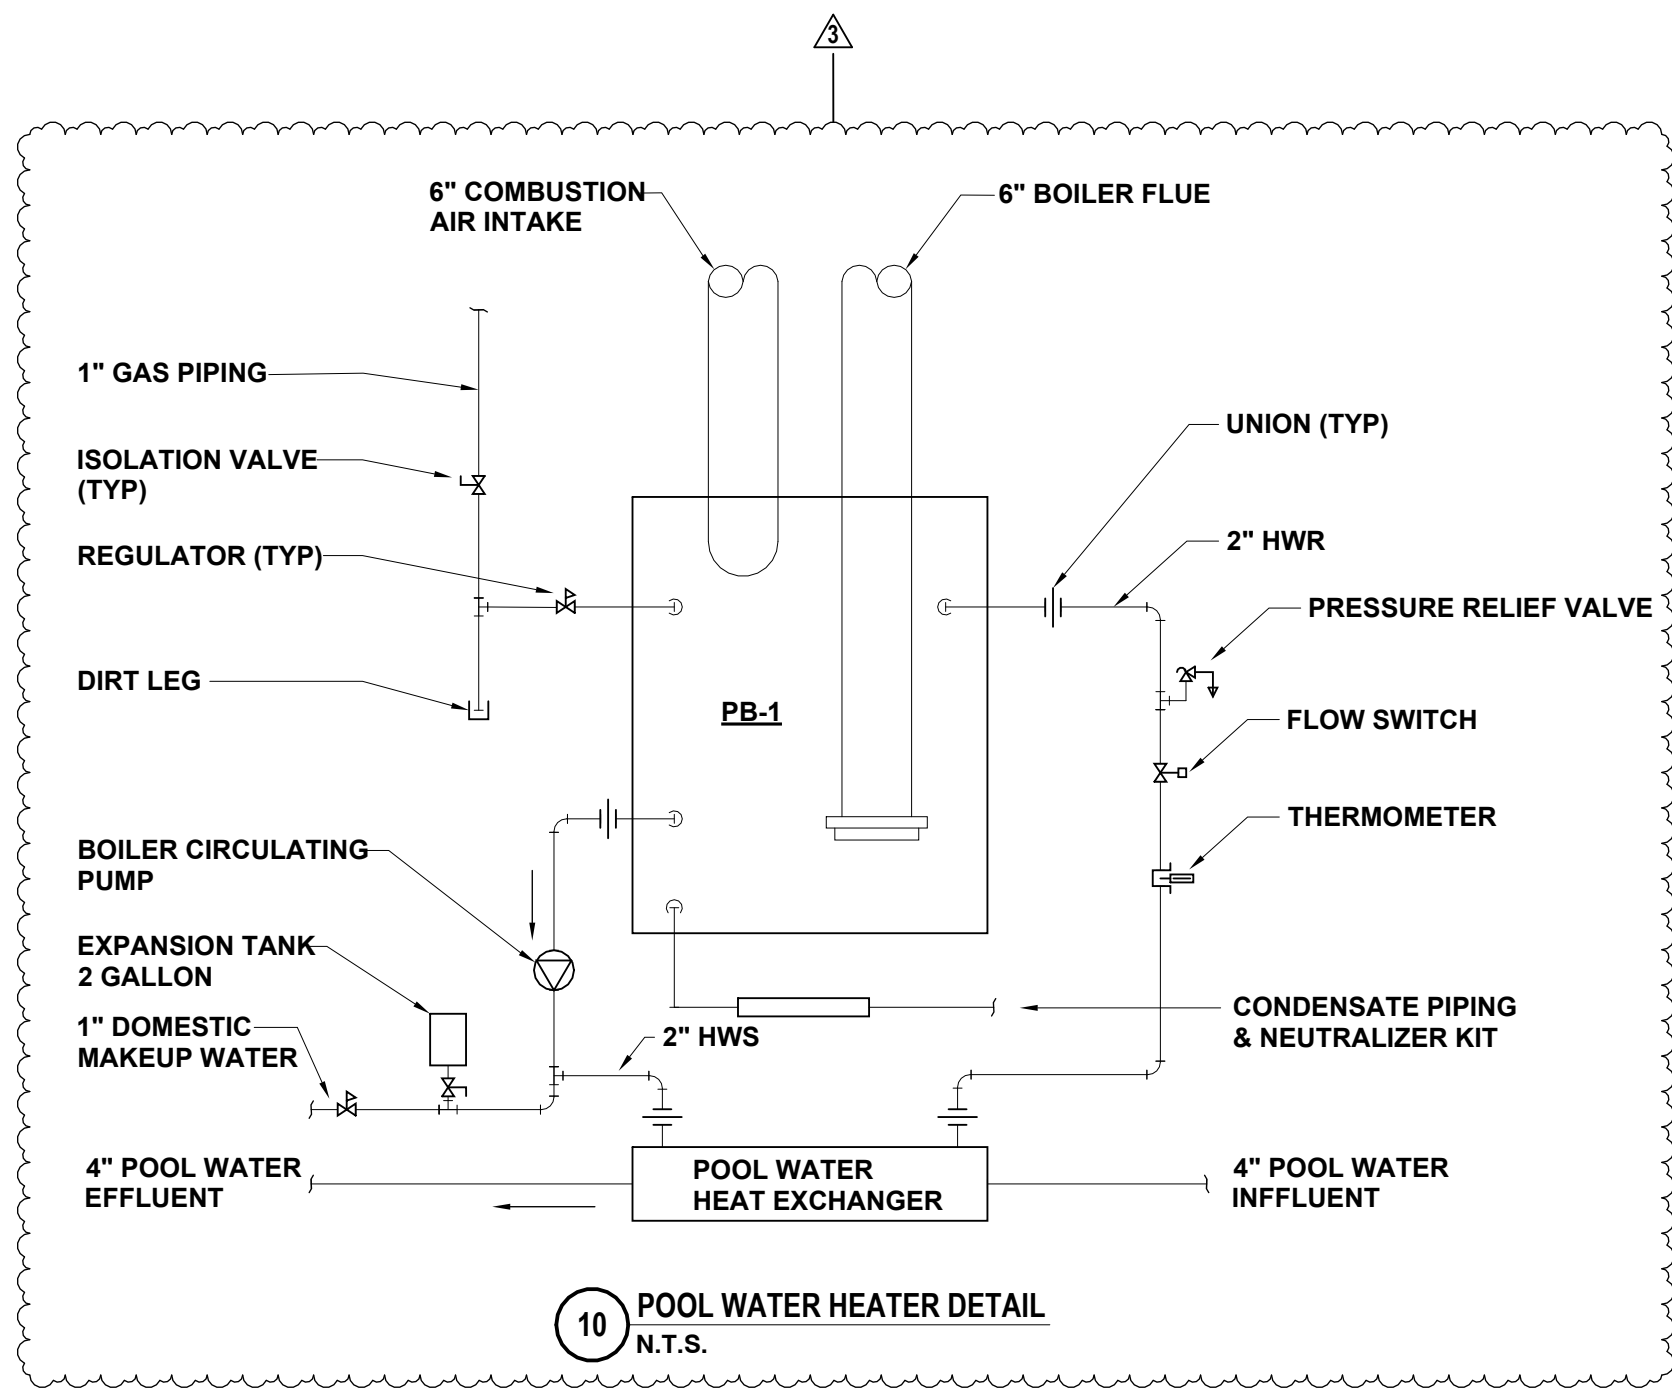

- NOTE: GENERIC SYMBOL USED TO SHOW VALVE LOCATION(S). REFER TO SPECIFICATIONS FOR EXACT VALVE TYPE.
1. STEAM TRAP SIZED TO 3 TIMES COIL CAPACITY UNLESS OTHERWISE NOTED. FLOAT AND THERMOSTATIC TYPE ABOVE 10 MBH, THERMOSTATIC TYPE UNDER 10 MBH.
  2. UNIT HEATER STEAM PIPING SCHEMATIC. N.T.S.

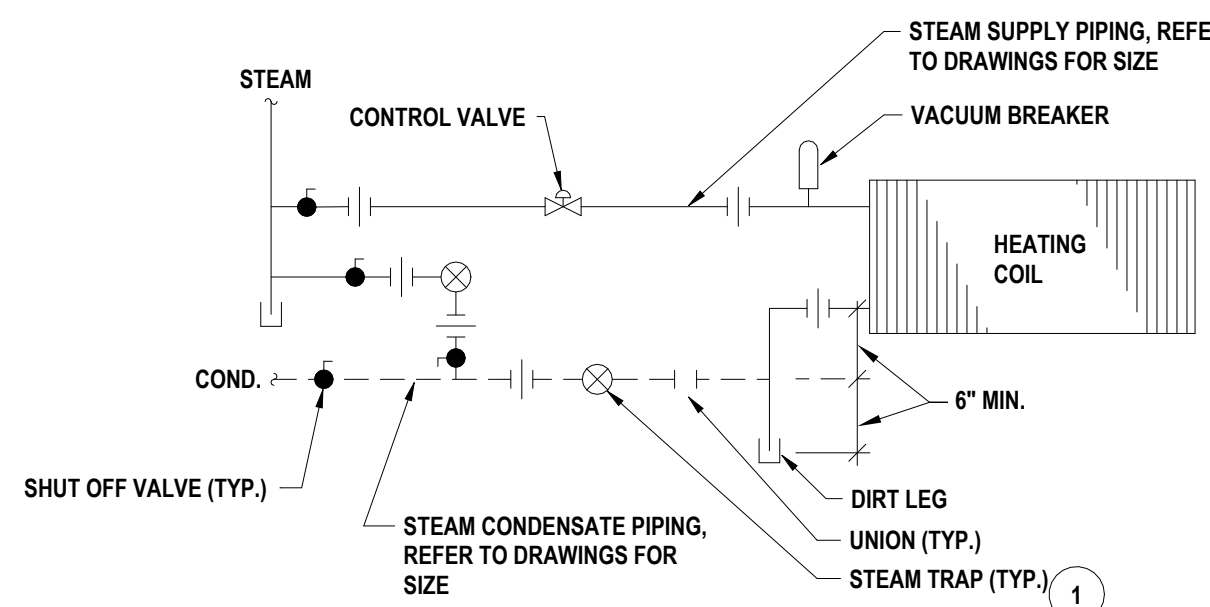

- NOTE: GENERIC SYMBOL USED TO SHOW VALVE LOCATION(S). REFER TO SPECIFICATIONS FOR EXACT VALVE TYPE.
1. STEAM TRAP SIZED TO 3 TIMES COIL CAPACITY UNLESS OTHERWISE NOTED. FLOAT AND THERMOSTATIC TYPE ABOVE 10 MBH, THERMOSTATIC TYPE UNDER 10 MBH.
  2. STEAM COIL PIPING SCHEMATIC. N.T.S.

DRAWN BY: QDW  
CHECKED BY: KEG  
DATE: 04/07/2026  
PHASE: CP

REVISION:  
ISSUED FOR AD #5

# DATE: 3 07/2026

IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER'S ARCHITECT'S OR SURVEYOR'S SEAL.