

VILLAGE OF RIVERSIDE

RIVERSIDE VILLAGE CENTER RESTROOM RENOVATIONS

35 STANTON STREET, PAINTED POST, NY 14870

CONSTRUCTION DOCUMENTS

LIST OF DRAWINGS:

GENERAL DRAWINGS

VC-G0.1 SYMBOLS AND ABBREVIATIONS

ARCHITECTURAL DRAWINGS

VC-A0.1 FIRST FLOOR DEMO PLAN & ABATEMENT PLAN
VC-A1.1 FIRST FLOOR PLAN & DETAILS
VC-A2.1 FLOOR AND WALL FINISH PLANS
VC-A3.1 INTERIOR FINISH SCHEDULES

MECHANICAL DRAWINGS

VC-M1.1 MECHANICAL AND PLUMBING PLANS

ELECTRICAL DRAWINGS

VC-E1.1 ELECTRICAL PLANS

SITE




ISSUE FOR BID: 09/14/2026
08/11/2026
HUNT PROJECT NO.: 1004-054

THIS IS TO CERTIFY THAT TO THE BEST OF OUR KNOWLEDGE, INFORMATION AND BELIEF - THE DESIGN OF THIS PROJECT CONFORMS TO ALL APPLICABLE PROVISIONS AND BUILDING CODE, THE NEW YORK STATE UNIFORM FIRE PREVENTION AND BUILDING CODE AND THE NEW YORK STATE ENERGY CONSERVATION CODE.

SITEWORK SYMBOLS		SITEWORK SYMBOLS		PLUMBING SYMBOLS		PLUMBING SYMBOLS		HVAC SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS																							
	CONTROL POINT		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	UTILITY POLE W/ ANCHOR		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	SIGN		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	EXG. WATER VALVE		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	NEW WATER VALVE		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	UTILITY POLE W/ LIGHT		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	STREET LIGHT		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	EXG. FIRE HYDRANT		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	NEW FIRE HYDRANT		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	CATCH BASIN/ DRYWELL		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	CURB BOX VALVE		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	EXISTING DECIDUOUS TREE		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	EXISTING CONIFEROUS TREE		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	EXG. ELEVATION		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	NEW ELEVATION		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	GAS LINE		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	EXISTING MANHOLE		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	NEW MANHOLE		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	NEW CONTOUR*		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	EXISTING ELECTRIC*		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	WATER LINE*		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	SANITARY LINE*		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	TELEPHONE LINE*		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	STORM SEWER*		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW FENCE		GUARD RAIL		EASEMENT LINE		CONCRETE MONUMENT		PLUMBING SYMBOLS		HVAC SYMBOLS		ELECTRICAL SYMBOLS		TECHNOLOGY SYMBOLS		ARCHITECTURAL SYMBOLS		ARCHITECTURAL SYMBOLS
	OVERHEAD UTILITY		TEST PIT		TEST HOLE		RIP RAP		COORDINATE POINT LOCATION		5/8" REBAR WITH SURVEY CAP SET		EXISTING IRON ROD		EXISTING IRON PIPE		UTILITY POLE		ORIGINAL LOT LINE		DEED LINE		PROPERTY LINE		EXISTING FENCE		NEW F																		

ELECTRICAL SYMBOLS


 NON-FUSED DISCONNECT SWITCH

 FUSED DISCONNECT SWITCH

 MAGNETIC STARTER

 COMBINATION MAGNETIC MOTOR STARTER AND FUSED DISCONNECT SWITCH

 FLUSH WALL MOUNTED POWER PANEL

 SURFACE MOUNTED POWER PANEL

 MOTOR TYPE ELECTRICAL LOAD

 HAND DRYER / HAIR DRYER ELEC. LOAD

 UV-UNIT VENT

 AHU-AIR HANDLING UNIT


 FC- FAN COIL UNIT


 P-PUMP


 EF-EXHAUST FAN


 CU-CONDENSING UNIT

 DUPLEX RECEPTACLE WALL MOUNTED (GF-GROUND FAULT CIRCUIT INTERRUPT) (IG-ISOLATED GROUND TYPE) WP-GROUND FAULT TYPE IN WATERPROOF CAST ALUMINUM HOUSING AC-MNT. ABOVE COUNTER BACKSPLASH BC-MNT. BELOW COUNTER


 SPECIAL RECEPTACLE WITH NEMA CONFIGURATION SHOWN

 LARGE CAPACITY COMMUNICATIONS BOX WITH 2-GANG OPENING

 QUAD RECEPTACLE

 TOGGLE SWITCH

 KEYED TYPE TOGGLE SWITCH

 0-10V DIMMING SWITCH


 VACANCY SENSOR TYPE SWITCH

 CEILING MOUNTED DOWN LIGHT FIXTURE

 TRACK LIGHTING WITH FIXTURES

 STRIP TYPE LIGHT FIXTURE

 RECESSED LIGHT FIXTURE

 2x4' RECESSED LIGHT FIXTURE EM-DENOTED EMERGENCY FIXTURE, CONNECTED TO EMERGENCY CIRCUIT; NL-DENOTES NITE LIGHT CKT. TYPES VARY REFER TO FIXTURE SCHEDULE

 PENDANT MOUNTED LIGHT FIXTURE

A	AREA
A/C	AIR CONDITIONING COOLING
AB	ANCHOR BOLTS
ABV	ABOVE
AC	ALTERNATING CURRENT
ACT	ACOUSTICAL TILE
AD	AREA DRAIN
ADD	ADDENDUM
ADH	ADHESIVE
ADJ	ADJACENT
AESS	ARCHITECTURAL EXPOSED STRUCTURAL STEEL
AFF	ABOVE FINISH FLOOR
AGG	AGGREGATE
AHU	AIR HANDLER
AL	ALUMINUM
ALIGN	ALIGNMENT
ALLOW	ALLOWANCE
ALT	ALTERNATE
AMP	AMPERAGE
ANC	ANCHOR (AGE)
ANOD	ANODIZED
APPROX	APPROXIMATE
ARCH	ARCHITECTURAL
ASB	ASBESTOS
ASBC	ASBESTOS CONTRACTOR
ASPH	ASPHALT
AUX	AUXILIARY
AVG	AVERAGE
AWG	AMERICAN WIRE GAGE
BCJ	BRICK CONTROL JOINT
BCU	CLOSER COIL UNIT
BD	BOARD
BEJ	BRICK EXPANSION JOINT
BEL	BELOW
BEV	BEVELED
BF	BOARD FEET
BIT	BITUMINOUS
BLD	BUILDING
BLK	BLOCK
BLKG	BLOCKING
BM	BENCH MARK
BOF	BOTTOM OF FOOTING
BOT	BOTTOM
BPL	BEARING PLATE
BRG	BEARING
BRK	BRICK
BRKT	BRACKET
BS	BOTH SIDES
BTU	BRITISH THERMAL UNITS
BUR	BUILT-UP ROOF
BW	BOTHWAYS
C	CHANNEL
C-C	CENTER TO CENTER
CAB	CABINET
CAP	CAPACITY
CB	CATCH BASIN
CBF	HUNDRED BOARD FEET
CD	COLD DRAWN
CEM	CEMENT
CER	CERAMIC
CF	CUBIC FOOT
CFG	COUNTER FLASHING
CFM	CUBIC FOOT/MINUTE
CFMF	COLD-FORMED METAL FRAMING
CFS	CUBIC FEET/SECOND
CH	CABINET HEATER
CHBD	CHALKBOARD
CI	CAST IRON
CIP	CAST-IN PLACE CONCRETE
CIR	CIRCLE
CJ	CONTROL JOINT
CK	CAULKING
CLG	CEILING

CLO	CLOSET
CLR	CLEAR(ANCE)
CLS	CLOSURE
CMP	CORRUGATED METAL PIPE
CMU	CONCRETE MASONRY UNIT
CO	CLEANOUT, COMPANY
COL	COLUMN
COMB	COMMINATION
COMP	COMPRESSED, (ION), (IBLE)
CON	CONNECTOR, CONNECTION
CONC	CONCRETE
CONST	CONSTRUCTION
CONT	CONTINUOUS, CONTINUE
CONTR	CONTRACT (OR)
COORD	COORDINATE
CP	CLAY PIPE
CPG	COPING
CPR	COPPER
CPT	CARPET(ED)
CR	COLD ROLLED
CRS	COURSE(S)
CSMT	CASEMENT
CST	CAST STONE
CT	CERAMIC TILE
CTR	COUNTER
CU	CUBIC
CULV	CULVERT
CV	CHECK VALVE
CW	COLD WATER
CY	CUBIC YARD
DBL	DOUBLE
DC	DIRECT CURRENT
DEG	DEGREE
DEMO	DEMOLITION
DF	DRINKING FOUNTAIN
DIA	DIAMETER
DIAG	DIAGONAL
DNM	DIMENSION
DIV	DIVISION
DL	DEAD LOAD
DLV	DOOR LOUVER
DN	DOWN
DOZ	DOZEN
DP	DAMP-PROOFING
DPR	DAMPER
DR	DOOR
DS	DOORPOUT
DT	DRAIN TILE
DTA	DOVETAIL ANCHOR
DTL	DETAIL
DWG	DRAWING
EA	EACH
EC	ELECTRICAL CONTRACTOR
EF	EACH FACE
EJ	EXPANSION JOINT
EL	ELEVATION
ELEC	ELECTRIC(AL)
ELEV	ELEVATOR
EMER	EMERGENCY
ENC	ENCLOSE, ENCLOSURE
ENG	ENGINEER
ENT	ENTRANCE
EOC	EVERY OTHER COURSE
EOD	EDGE OF DECK
EOS	EDGE OF SLAB
EP	ELECTRICAL PANEL BOARD
EQ	EQUAL
EQP	EQUIPMENT
EST	ESTIMATE(D)
EW	EACH WAY
EWG	ELECTRIC WATER COOL
EFW	ELECTRIC WALL FAN
EXC	EXCAVATE

GENERAL ASBESTOS ABATEMENT NOTES:

- A REFER TO ASBESTOS ABATEMENT SPECIFICATION FOR ADDITIONAL INFORMATION.
- B ALL WORK IS TO COMPLY WITH APPLICABLE CODE WITHIN JURISDICTION OR HIGHER. SITE SPECIFIC VARIANCES MAY BE IMPLEMENTED IF APPROVED BY THE ARCHITECT.
- C ASBESTOS SURVEY WAS CONDUCTED AND THE REPORT IS ON FILE WITH THE OWNER.
- D THE REGULATED ABATEMENT WORK AREA SHALL BE VACATED BY THE OCCUPANTS AND NON-CERTIFIED PERSONNEL PRIOR TO WORK AREA PREPARATION, AND SHALL REMAIN VACATED UNTIL THE ASBESTOS PROJECT IS COMPLETE.
- E THE PERSONAL AND WASTE DECONTAMINATION SYSTEM ENCLOSURE(S) SHALL BE PROVIDED OUTSIDE THE REGULATED ABATEMENT WORK AREA AND ATTACHED TO THE BUILDING AT ENTRY/EXIT LOCATIONS. THESE LOCATIONS SHALL BE REVIEWED AND APPROVED BY THE OWNER/OWNERS REPRESENTATIVE PRIOR TO COMMENCEMENT OF WORK. THE DECONTAMINATION UNIT(S) SHALL BE CORDONED OFF AT A DISTANCE OF TWENTY-FIVE (25) FEET IN ALL DIRECTIONS TO SEPARATE IT FROM PUBLIC AREAS. THE CONTRACTOR SHALL ESTABLISH, MARK, AND MAINTAIN PROPER EXITS WITHIN EACH WORK AREA FOR NORMAL AND EMERGENCY USE AND MAINTAIN A CLEAR EGRESS PATH.
- F ALL TOOLS AND EQUIPMENT SHALL BE REMOVED FROM SITE AFTER DECONTAMINATION.
- G AFTER ALL REGULATED ABATEMENT WORK AREAS HAVE BEEN DISMANTLED ANY REMAINING REMOTE DECONTAMINATION ENCLOSURES MUST BE DISMANTLED AND REMOVED FROM SITE. ALL PLASTIC SHEETHING SHALL BE REMOVED AND DISPOSED OF AS ASBESTOS WASTE.
- H ALL WASTE GENERATED AS PART OF ASBESTOS PROJECT SHALL BE REMOVED FROM THE SITE WITHIN TEN (10) CALENDAR DAYS AFTER SUCCESSFUL COMPLETION OF ALL REGULATED WORK AREAS.
- I ALL WASTE GENERATED AS PART OF THE ASBESTOS PROJECT SHALL BE LEGALLY DISPOSED OF AT AN APPROVED LANDFILL FACILITY. ALL GENERATED WASTE REMOVED SHALL BE DOCUMENTED, ACCOUNTED FOR AND DISPOSED OF IN COMPLIANCE WITH REQUIREMENTS OF EPA NESHAP.

ABATEMENT PLAN DRAWING NOTES:


- AB1 REMOVE ASBESTOS CONTAINING VCT FLOORING, MASTIC, VINYL BASE, TRANSITION STRIPS, AND ALL FLOORING ACCESSORIES. REFER TO SPECIFICATION SECTION 02 21 10 FOR APPROX. QUANTITIES.
- AB2 REMOVE ASBESTOS CONTAINING PIPE INSULATION, INSULATION JACKET, AND MUD JOINTS. REFER TO SPECIFICATION SECTION 02 21 10 FOR APPROX. QUANTITIES.

GENERAL DEMO NOTES:



- A ASBESTOS ABATEMENT IS BEING PERFORMED. ASBESTOS CONTAINING MATERIALS ARE PRESENT IN THE EXISTING BUILDING. REFER TO SPECIFICATIONS FOR LOCATIONS AND SCHEDULE. THE OWNER HAS REPORTS IDENTIFYING ACM MATERIALS AND WILL HAVE THESE AVAILABLE FOR CONTRACTORS REFERENCE. IF SUSPECT MATERIAL NOT SCHEDULED IS ENCOUNTERED, STOP WORK IMMEDIATELY, DO NOT DISTURB THE MATERIAL, AND NOTIFY THE OWNER'S REPRESENTATIVES.
- B CONTRACTOR TO PROVIDE PROTECTIVE BARRIER AT ALL AREAS OF DEMOLITION. KEEP ALL EXITS FREE AND CLEAR AT ALL TIMES DURING FACILITY OPERATIONS.
- C THE OWNER RESERVES THE RIGHT TO RETAIN ANY REMOVED ITEMS AFTER CONTRACTOR REMOVAL. THE CONTRACTOR SHALL REMOVE FROM THE SITE AND DISPOSE OF ALL REMOVED ITEMS THE OWNER DOES NOT WISH TO RETAIN.
- D CONTRACTOR SHALL PROTECT EXISTING CONSTRUCTION TO REMAIN AS REQUIRED DURING DEMOLITION. PATCH, REPAIR, PAINT OR RE-FINISH EXISTING CONSTRUCTION MATERIALS AND FINISHES DAMAGED DURING DEMOLITION TO THEIR ORIGINAL CONDITION.
- E CONTRACTOR TO COORDINATE THE WORK OF THIS CONTRACT WITH THE WORK OF ALL OTHER CONTRACTED WORK AND WORK PERFORMED BY THE OWNER.
- F DIMENSIONS SHOWN FOR ALL NEW OPENINGS IN EXISTING CONSTRUCTION SHOULD BE COORDINATED WITH THE NEW PLANS AND EXISTING CONDITIONS IN THE FIELD.
- G ITEMS SHOWN ARE INTENDED TO GIVE APPROXIMATE QUANTITY, LOCATION AND TYPE. CONTRACTOR IS RESPONSIBLE FOR VERIFYING ACTUAL QUANTITIES AND EXISTING FIELD CONDITIONS IN ORDER TO COMPLETE THE WORK.
- H COORDINATE ANY WALL/FLOOR REPAIR/INFILL THAT IS CAUSED BY THE REMOVAL OF EQUIPMENT BY OTHER PRIME CONTRACTORS AND PREPARE SURFACE TO RECEIVE NEW FINISHES.
- I REMOVE EXISTING WOOD BLOCKING FOR EXISTING WALL MOUNTED EQUIPMENT AND/OR DEVICES THAT INTERFERE WITH NEW WORK OR NEW ROOM FINISHES AND WALL TREATMENTS. TYPICAL FOR ALL AREAS.
- J MAINTAIN EXISTING STRUCTURAL SYSTEMS AT ALL TIMES. PROVIDE TEMPORARY SHORING AND BRACING AT LOCATIONS WHERE THE EXISTING STRUCTURE IS BEING MODIFIED. PROTECT THE EXISTING STRUCTURE SCHEDULED TO REMAIN FROM DAMAGE DURING DEMOLITION. MAINTAIN SHORING AND BRACING UNTIL THE NEW STRUCTURE IS INSTALLED AND READY TO ACCEPT LOADS.
- K GRINDING OF CONCRETE FLOORS AND SUBSTRATES OF DIFFERENT HEIGHTS IN THE SAME AREA IS REQUIRED AT WALL REMOVALS AND NEW DOORS IN EXISTING WALLS TO ALLOW THE NEW FINISHES TO ALIGN BETWEEN ADJACENT ROOMS AND ADJACENT ROOMS THAT BECOME ONE ROOM.
- L ROOM NUMBERS INDICATED ARE EXISTING BUILDING NUMBERS. REFER TO NEW FLOOR PLANS FOR NEW ROOM NUMBERING.

DEMOLITION NOTES:


- D1 REMOVE STUD PARTITION COMPLETELY UP TO EXISTING DECK OR STRUCTURE ABOVE TO EXTENTS SHOWN ON PLAN. DEMOLITION TO INCLUDE BASE, DOORS, FRAMES GLAZING AND ALL WALL MOUNTED/RECESSED ACCESSORIES, CASEWORK AND EQUIPMENT. EXISTING WOOD BASE TO BE SALVAGED AND REINSTALLED.
- D2 REMOVE DOOR, FRAME, AND HARDWARE IN THEIR ENTIRETY TO EXTENTS SHOWN ON PLAN.
- D3 REMOVE TOILET PARTITIONS ASSOCIATED BRACING, ACCESSORIES AND ALL WALL MOUNTED ITEMS INCLUDING, BUT NOT LIMITED TO MIRRORS, SOAP DISPENSERS, GRAB BARS, ETC. PREPARE FLOOR AND WALL SURFACES FOR NEW FINISHES.
- D4 REMOVE BUILT-IN CASEWORK/SHELVING UNITS, MARKER/DISPLAY BOARDS, MIRRORS AND WALL MOUNTED ACCESSORIES IN THEIR ENTIRETY. PREPARE SURFACES FOR NEW FINISHES.
- D5 REMOVE DESK WITH CARE AND STORE FOR REINSTALLATION.
- D6 REMOVE ACCORDION PARTITION AND ASSOCIATED HARDWARE IN THEIR ENTIRETY. PREPARE SURFACES TO RECEIVE NEW FINISHES.
- D7 REMOVE GNB CEILING TO EXTENTS SHOWN ON PLAN IN ITS ENTIRETY. PREPARE SURFACES TO RECEIVE NEW FINISHES.
- D8 SAWCUT AND REMOVE EXISTING SLAB-ON-GRADE TO EXTENTS SHOWN TO ACCOMMODATE INSTALLATION OF PLUMBING ELEMENTS.
- D9 SECTION OF PARTITION TO BE REMOVED UP TO BULKHEAD HEIGHT. ADD WOOD BLOCKING AS NEEDED TO MATCH SURROUNDING BULKHEAD HEIGHT. PREPARE SURFACES FOR NEW GNB AND FINISHES.
- D10 PROVIDE NEW OPENING IN STUD PARTITION WALL FOR NEW DOOR AND FRAME ASSEMBLY.
- D11 REMOVE EXISTING CARPET FLOORING IN IT'S ENTIRETY. REMOVE EXISTING FLOOR BASE WITH CARE AND STORE FOR REINSTALLATION. PREPARE EXISTING CONCRETE SLAB FOR NEW FLOORING.
- D12 EXISTING COUNTER, SUPPORT PANEL, AND BUILT IN CASEWORK TO REMAIN. PROTECT IN PLACE.
- D13 REMOVE DOOR AND FRAME WITH CARE. REFINISH FOR REINSTALLATION IN NEW LOCATION.
- D14 REMOVE FILING CABINETS WITH CARE AND STORE FOR REINSTALLATION.
- D15 REMOVE FREESTANDING TALL CABINET WITH CARE AND STORE FOR REINSTALLATION.

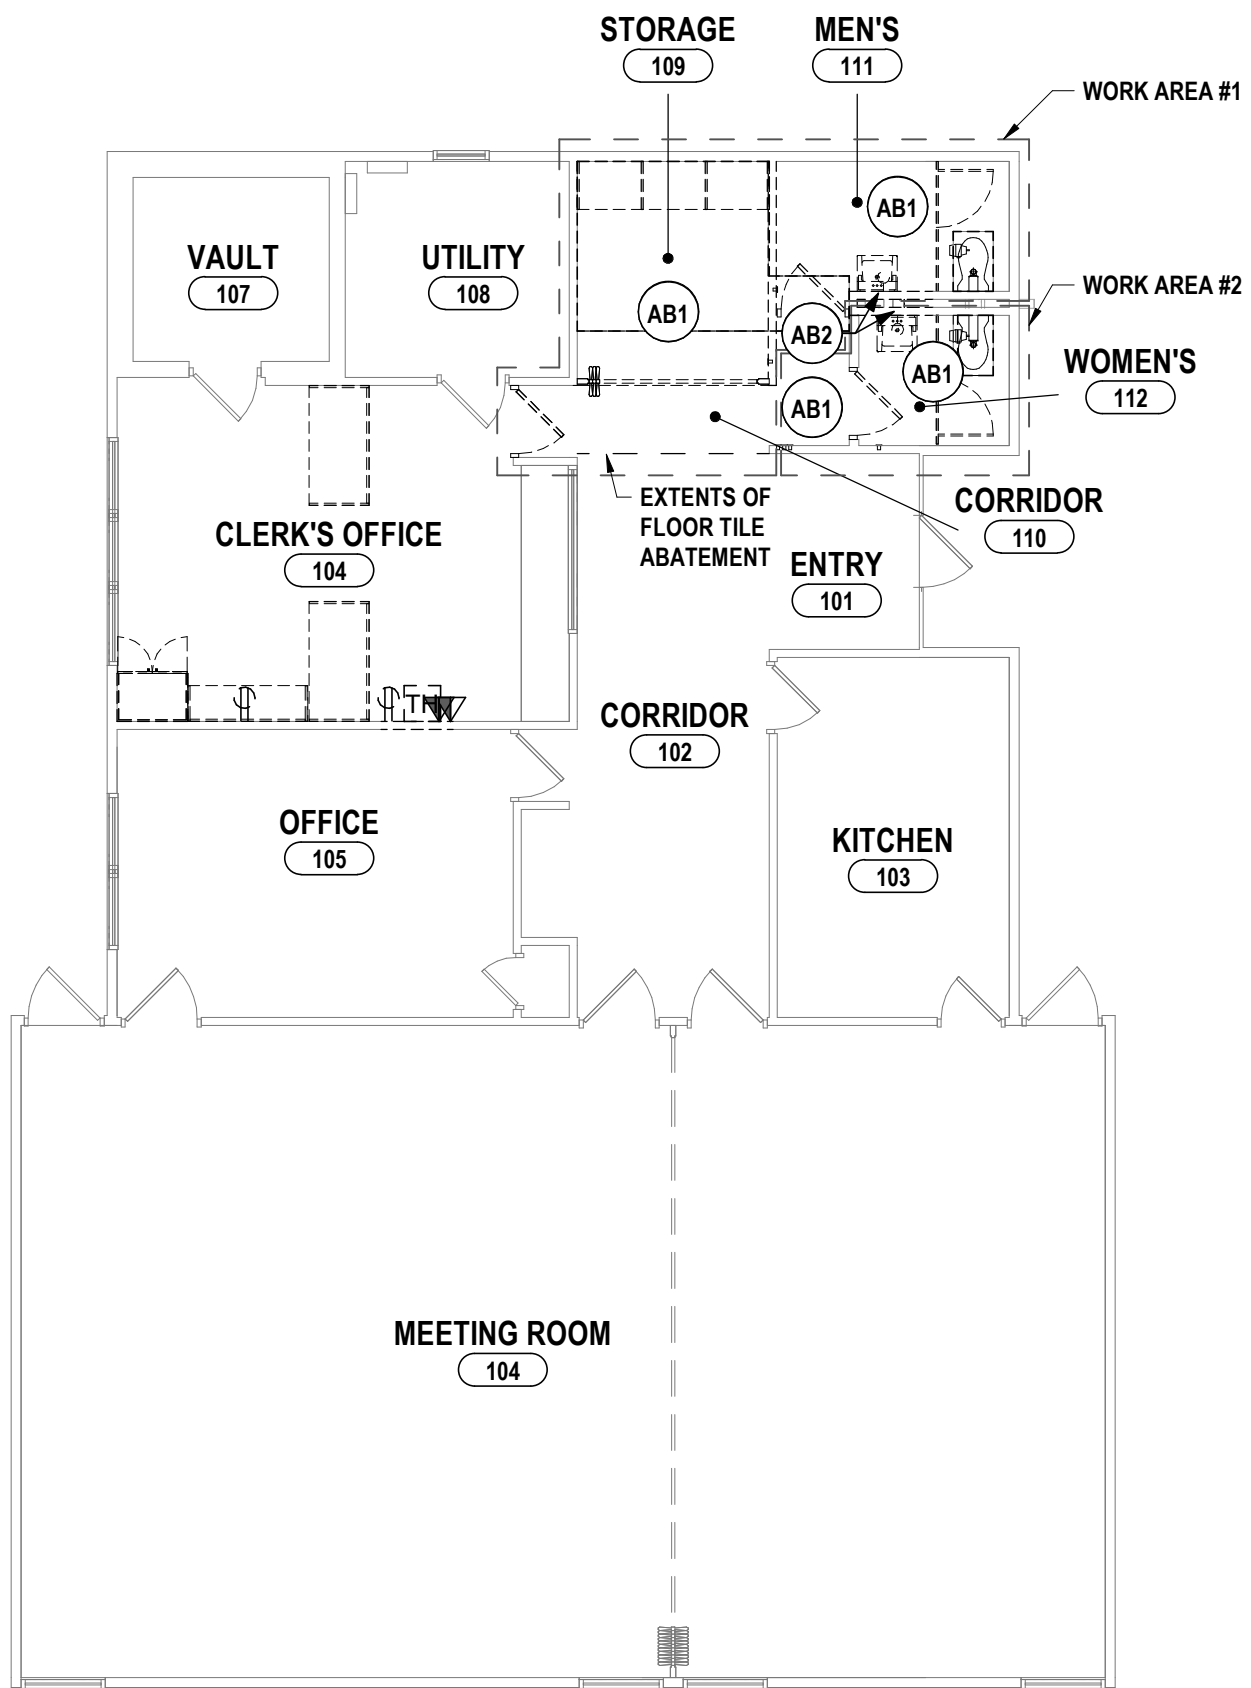

2 FIRST FLOOR ABATEMENT PLAN
1/8" = 1'-0"

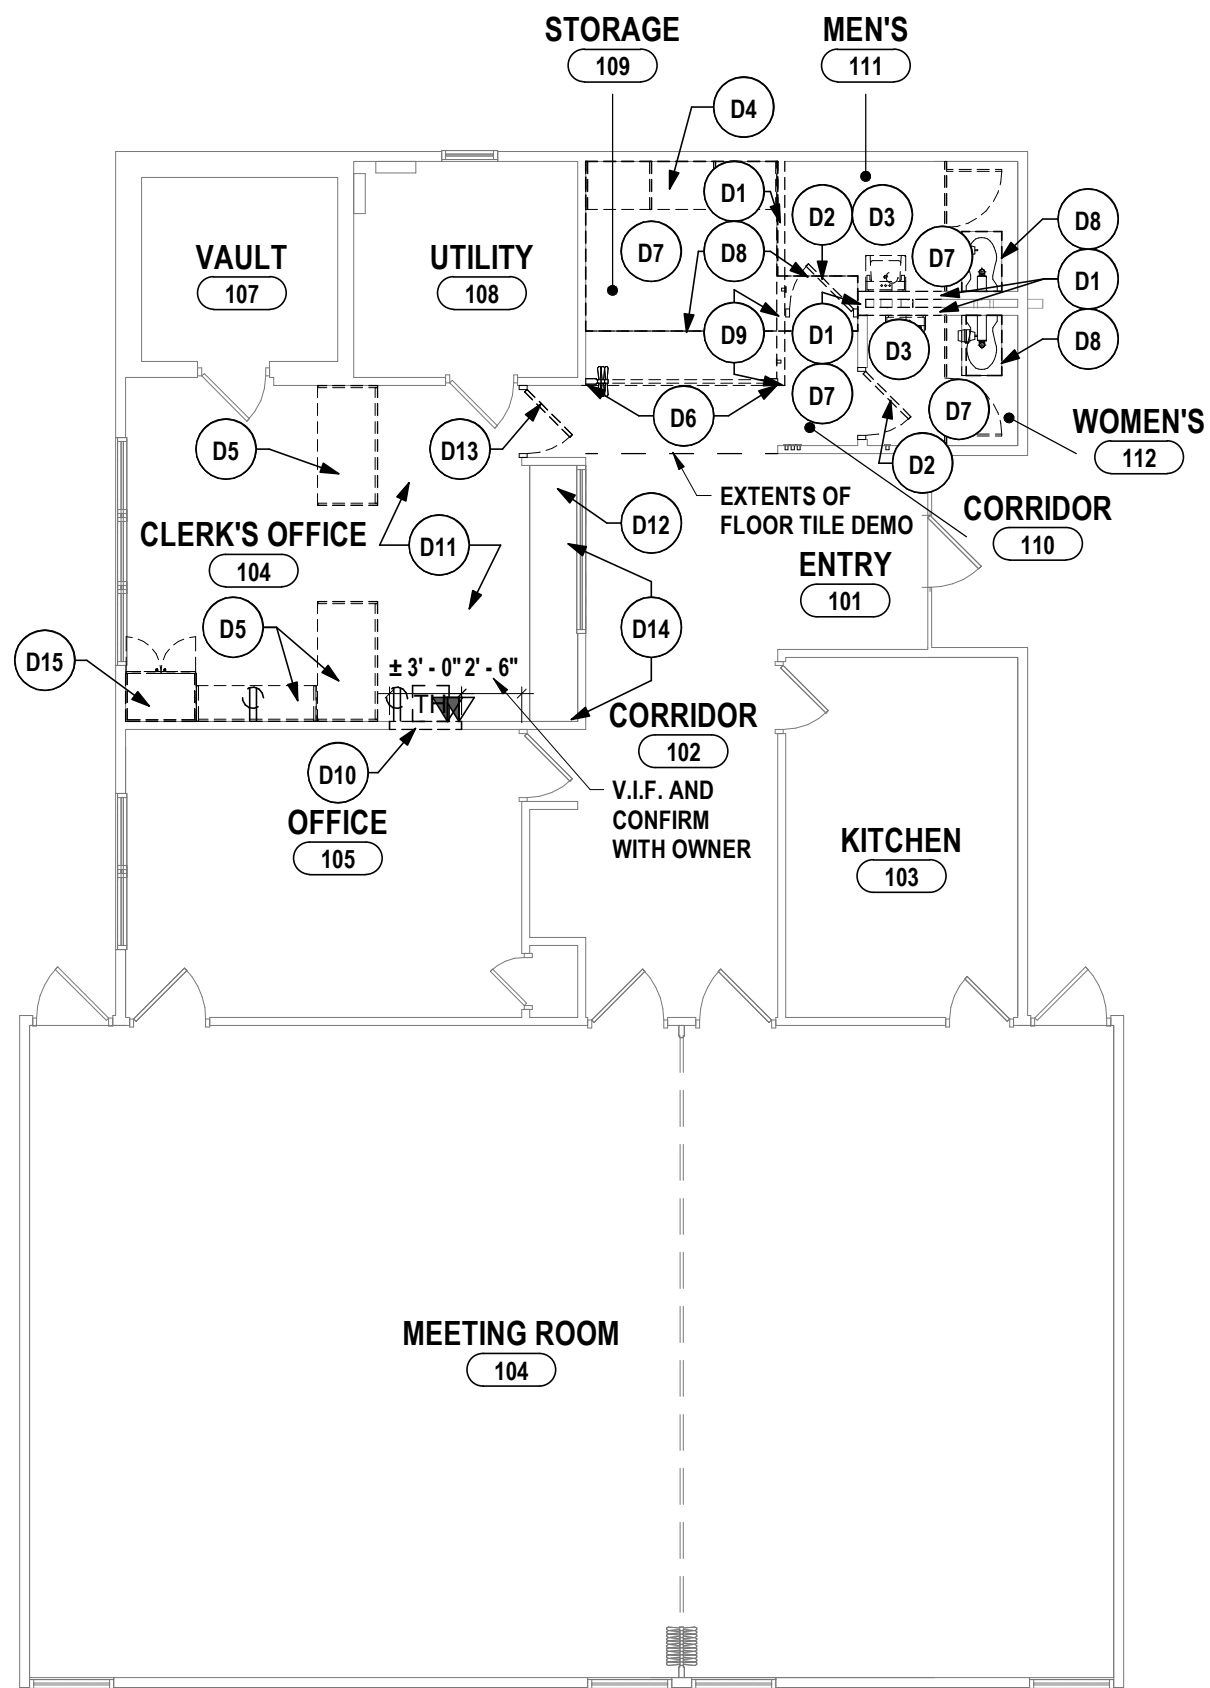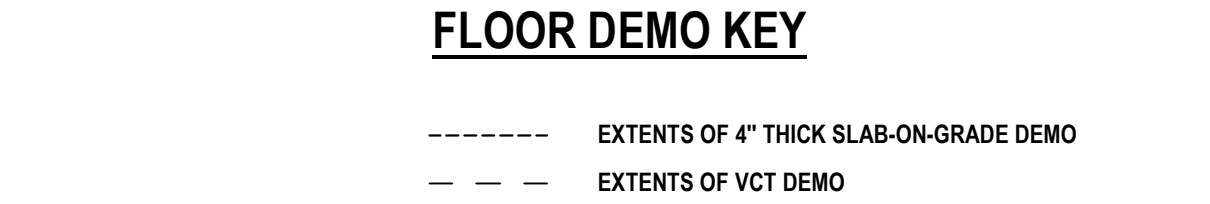

1 FIRST FLOOR DEMOLITION PLAN
1/8" = 1'-0"

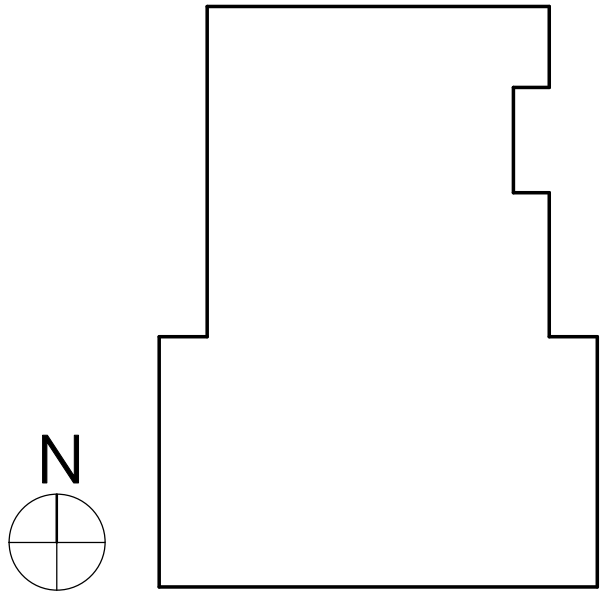


FIRST FLOOR DEMO PLAN & ABATEMENT PLAN
RIVERSIDE VILLAGE CENTER RESTROOM RENOVATIONS
VILLAGE OF RIVERSIDE
35 STANTON STREET PAINTED POST, NY 14870

HUNT ENGINEERS | ARCHITECTS | SURVEYORS
ALBANY, NY • BINGHAMTON, NY • HORSESHOE FALLS, NY • ROCHESTER, NY
SARASOTA, FL • WESTCHESTER, PA
WWW.HUNT-EAS.COM 807-358-1000
NY CERTIFICATE NO. 010520 PA CERTIFICATE NO. TSC220313464-1

VC-A0.1
PROJECT NO: 1004-054

DRAWN BY: CAM	
CHECKED BY: SJ	
DATE: 08/11/2026	
PHASE: CI	
#	REVISION
1	08/14/2026 ISSUE FOR BID
"IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER, ARCHITECT'S OR SURVEYOR'S SEAL."	

INTERIOR PARTITION TYPES

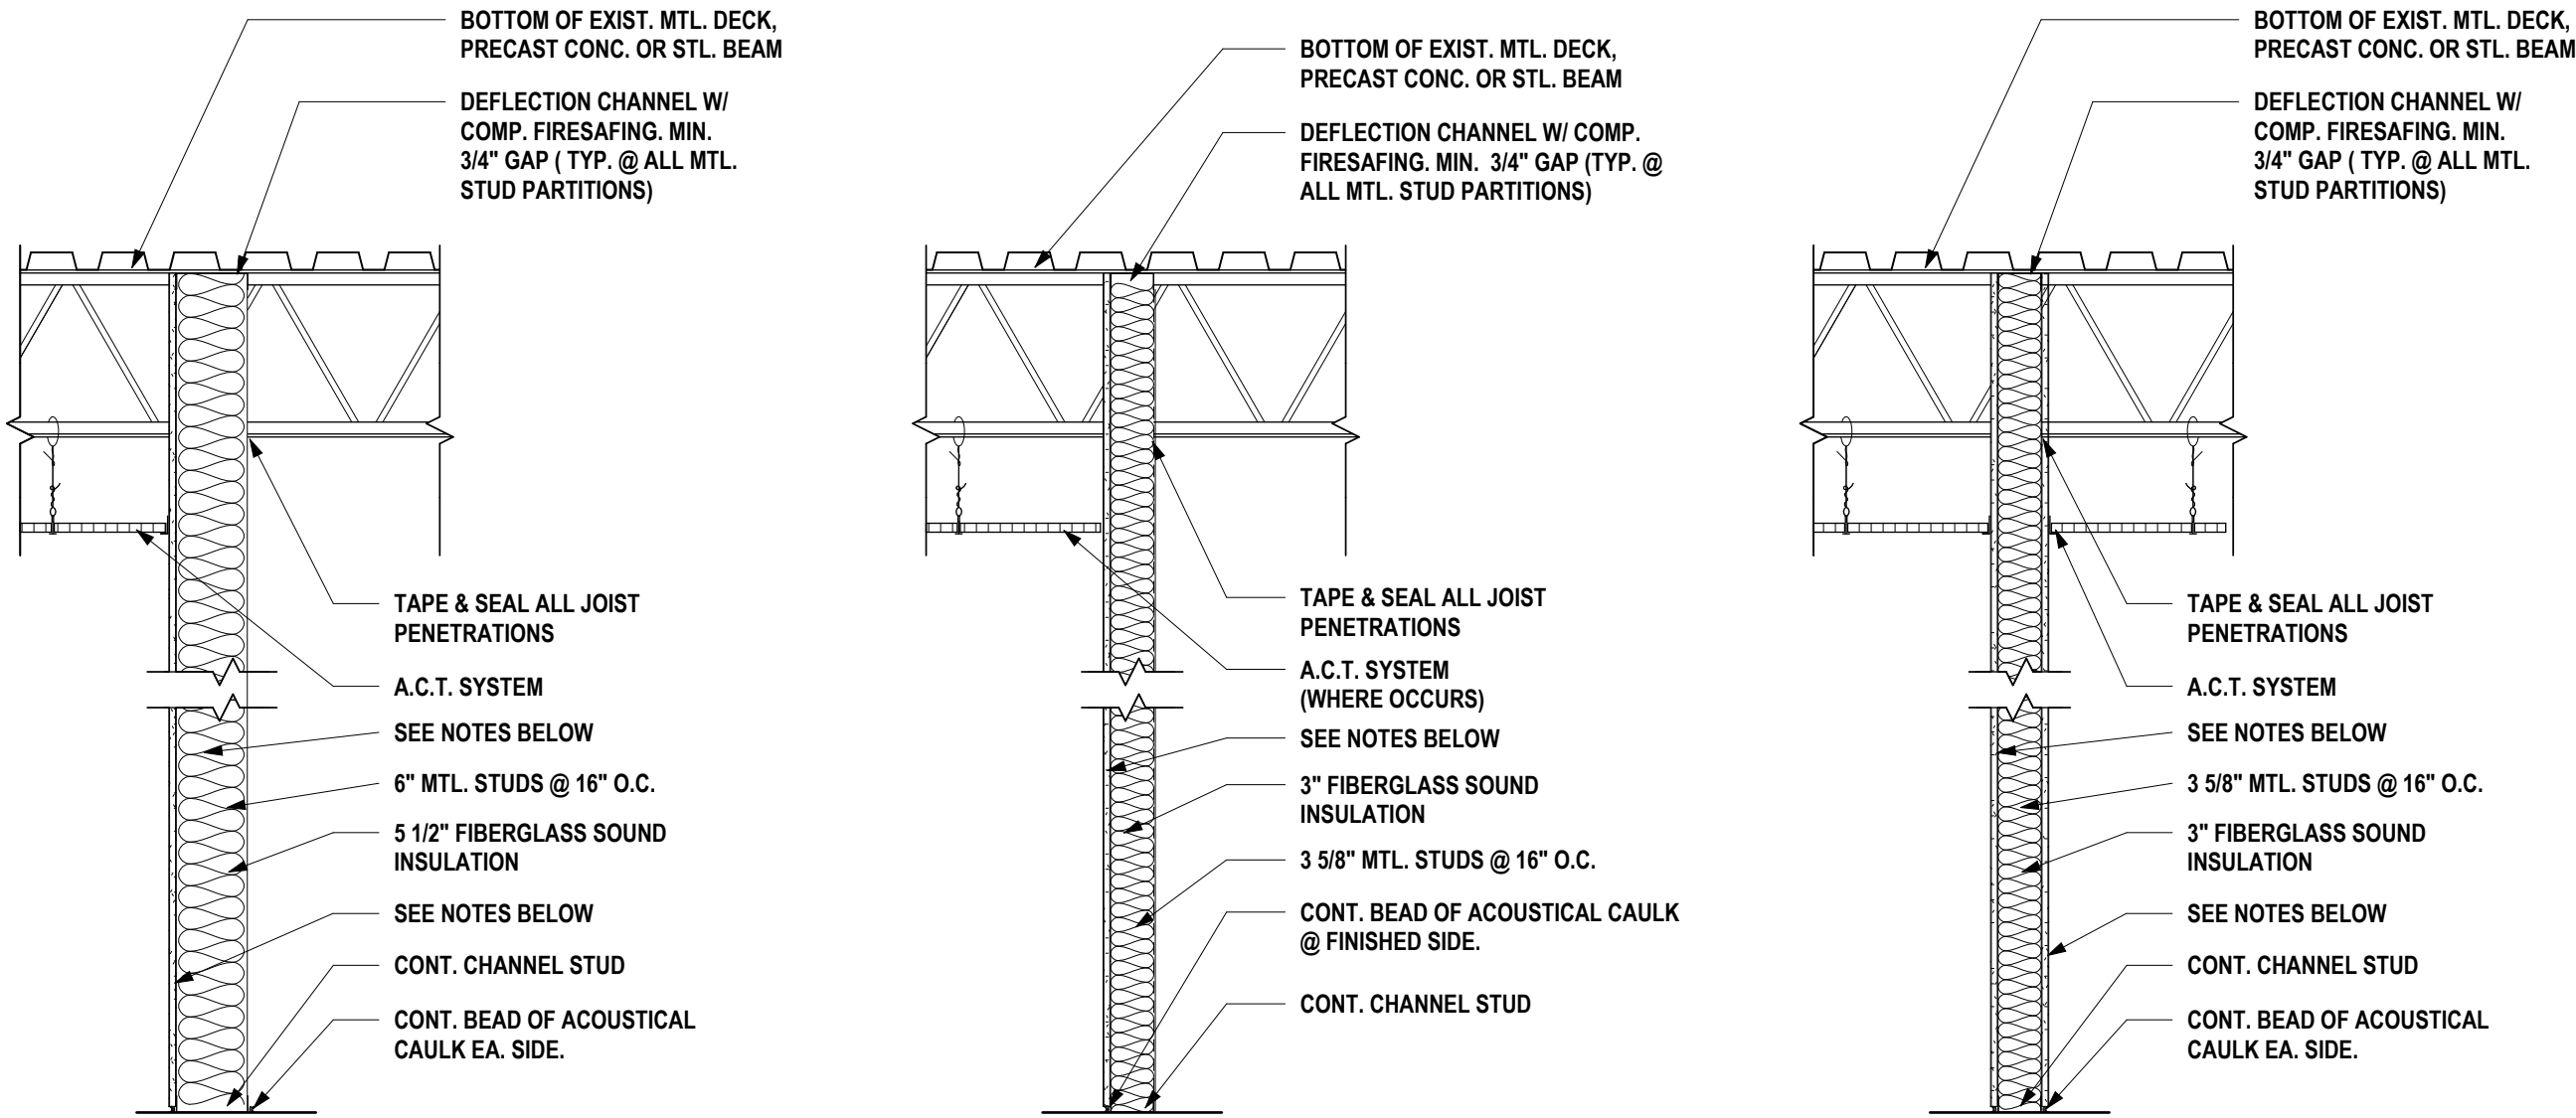

PARTITION TYPE


3 (1) LAYER 5/8" GWB ON ONE SIDE; MOISTURE RESISTANT GWB WITHIN 4"-0" OF A WET LOCATION

PARTITION TYPE

2 (1) LAYER 5/8" GWB ON ONE SIDE; MOISTURE RESISTANT GWB WITHIN 4"-0" OF A WET LOCATION

PARTITION TYPE

1 (1) LAYER 5/8" GWB EA. SIDE; MOISTURE RESISTANT GWB WITHIN 4"-0" OF A WET LOCATION

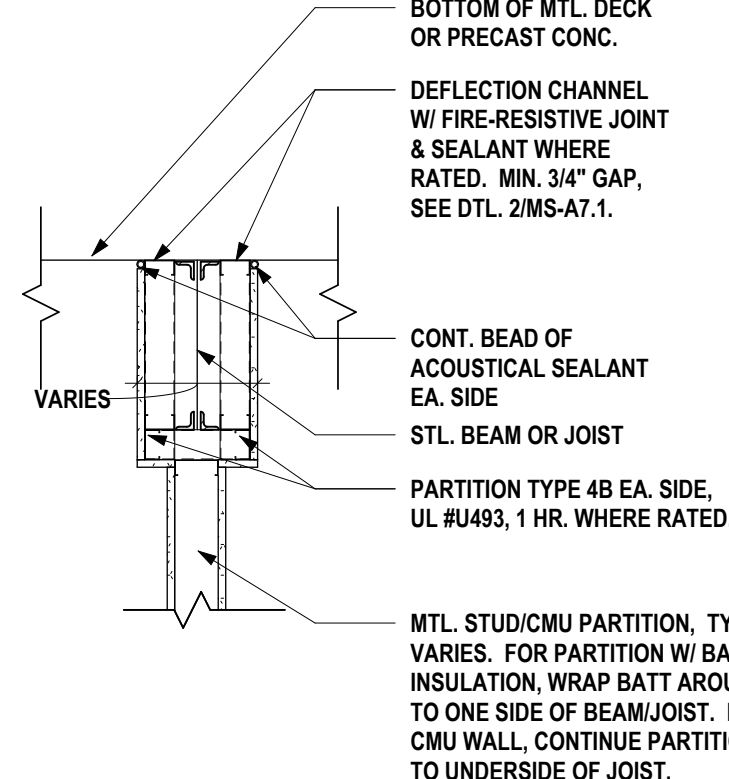

NOTE: TOP OF WALL CONDITION AT LOCATIONS WHERE WALL INTERSECTS PARALLEL TO STEEL. TYPICAL FOR ALL PARTITIONS.

NOTE: SEAL AND FIRESTOP ALL PENETRATIONS THROUGH ALL PARTITIONS SEE DETAILS 1-3 THIS SHEET TYPICAL ALL WALL TYPES.

NOTE: LOCATION OF UL DESIGNATED PARTITIONS AND THE LENGTH OF THEIR FIRE RATINGS ARE INDICATED ON CODE COMPLIANCE PLANS.

NOTE: ALL WALLS TO HAVE MOISTURE RESISTANT GWB AT WITHIN 4"-0" OF WET AREAS

GENERAL CEILING NOTES:

- ALL EXPOSED GYPSUM WALL BOARD SHALL BE PAINTED, UNLESS NOTED OTHERWISE.
- REFER TO FINISH KEY AND SCHEDULE FOR INDIVIDUAL CEILING TYPES AND SPECIFIED LOCATIONS.
- ALL NEW CEILING SYSTEMS TO BE INSTALLED DIRECTLY TO STRUCTURE. SUPPORT WIRES FOR SUSPENDED CEILING ASSEMBLY SHALL NOT BE TO ANY MECHANICAL, ELECTRICAL, PLUMBING OR FIRE PROTECTION PIPING OR EQUIPMENT.
- CENTER ALL DEVICES WITHIN CEILING GRID. COORDINATE WITH THE WORK OF ALL PRIME CONTRACTORS.
- ARCHITECTURAL DRAWINGS TAKE PRECEDENCE OVER ENGINEERING DRAWINGS FOR LOCATION OF LIGHT FIXTURES AND MECHANICAL EQUIPMENT. COORDINATE WITH ALL OTHER PRIME CONTRACTORS.
- CEILING GRID TO BE CENTERED WITHIN ROOMS, UNLESS NOTED OTHERWISE.
- INSTALL TROUBLE-ACCESS PANELS FURNISHED BY OTHER PRIME CONTRACTORS FOR GYPSUM WALL BOARD CEILING AREAS. COORDINATE SIZE, LOCATION, AND QUANTITY OF ACCESS PANELS WITH OTHER PRIME CONTRACTORS FOR ACCESS REQUIRED ABOVE HARD CEILING.
- PAINT ALL EXPOSED CONDUITS, JUNCTION BOXES, ELECTRICAL ITEMS (NOT FACTORY FINISHED), SPRINKLER LINES, MECHANICAL DUCTWORK AND PIPING UNLESS NOTED OTHERWISE. REFER TO FINISH KEY FOR COLORS.

GENERAL NOTES:

- THE CONTRACTOR IS RESPONSIBLE FOR ALL WORK REQUIRED TO IMPLEMENT THE WORK OF THE CONTRACT, REGARDLESS OF WHETHER SPECIFICALLY INDICATED OR NOT, UNLESS NOTED OTHERWISE.
- THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS IN THE FIELD PRIOR TO COMMENCING ANY WORK AND NOTIFY ARCHITECT IMMEDIATELY IF ANY DISCREPANCIES ARE FOUND.
- THE CONTRACTOR SHALL COORDINATE THE WORK OF THIS CONTRACT WITH THE WORK OF ALL OTHER CONTRACTED WORK AND WORK PERFORMED BY THE OWNER.
- ALL NEW DOOR FRAMES INSTALLED IN METAL STUD OR MASONRY PARTITIONS SHALL BE MOUNTED 4" FROM ADJACENT WALLS (6" TO DOOR). TOOTH IN CMU BLOCK AND ANCHORS AT DOORS IN EXISTING CMU WALLS, UNLESS NOTED OR DETAILED OTHERWISE.
- WHERE NEW DOORS ARE LOCATED IN EXISTING CORRIDOR WALLS, FLOORING, BASE AND WALL SHALL BE PATCHED TO MATCH EXISTING OR NEW CORRIDOR FINISHES. REFER TO FINISH KEY.
- PROVIDE SOLID WOOD BLOCKING OR METAL STRAPPING AS REQUIRED IN METAL STUD WALLS AT ALL WALL MOUNTED EQUIPMENT AND ACCESSORIES INCLUDING FURNITURE FIXTURES AND EQUIPMENT. COORDINATE WITH THE WORK OF ALL OTHER CONTRACTED WORK AND WORK PERFORMED BY THE OWNER.
- ITEMS SHOWN ARE INTENDED TO GIVE APPROXIMATE QUANTITY, LOCATION & TYPE. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ACTUAL QUANTITY & EXISTING FIELD CONDITIONS.
- ALL DIMENSIONS ARE TAKEN FROM FACE OF WALL TO FACE OF WALL, UNLESS NOTED OTHERWISE.
- THERE SHALL BE A MINIMUM OF 1'-6" CLEAR FLOOR SPACE ON THE PULL SIDE OF ALL NEW DOORS; THERE SHALL BE A MINIMUM OF 1'-4" CLEAR FLOOR SPACE ON THE PUSH SIDE OF ALL NEW DOORS.
- THE WHEELCHAIR SYMBOL INDICATES HANDICAP ACCESSIBLE MOUNTED FIXTURE ELEVATION AND SHALL CONFORM WITH CABO/ANSI A117.1 AND ADAAG.
- EXTEND ALL NEW PARTITIONS TO DECK ABOVE, UNLESS NOTED OTHERWISE.
- ALL FINISHED ASSEMBLIES ARE REQUIRED TO BE PROTECTED DURING THE COURSE OF CONSTRUCTION. ALL FINISHED ASSEMBLIES DAMAGED DURING THE COURSE OF CONSTRUCTION ARE REQUIRED TO BE REPLACED OR REPAIRED AT THE ARCHITECT'S DIRECTION.
- EXISTING INTERIOR PARTITIONS AT 108 UTILITY ROOM ARE 1 HOUR RATED. ALL PENETRATIONS SHALL BE FIRE CAULKED PER SPEC SECTION 07 40.00.




PLAN DRAWING NOTES:

- EXTENTS OF NEW FLOORING. SEE 'A8' DRAWING FOR MORE INFORMATION.
- NEW SLAB-ON-GRADE TO MATCH EXISTING SLAB-ON-GRADE THICKNESS. SEE 'TRENCHING BELOW EXISTING SLAB' DETAIL.
- REINSTALL STORED FREESTANDING TALL CABINET IN EXISTING LOCATION.
- REINSTALL STORED DESK IN EXISTING LOCATION.
- REINSTALL STORED FILING CABINETS IN EXISTING LOCATIONS.
- PATCH AND REPAIR ROOF WHERE EXISTING VENT IS REMOVED.

TOILET ROOM ACCESSORY SCHEDULE

SYMBOL	DESCRIPTION	MANUFACT.	MODEL	SIZE	REMARKS
1A	GRAB BAR	AMERICAN SPECIALTIES INC.	3800	36"	HORIZONTAL
1B	GRAB BAR	AMERICAN SPECIALTIES INC.	3800	42"	HORIZONTAL
1C	GRAB BAR	AMERICAN SPECIALTIES INC.	3800	18"	VERTICAL
2	SOAP DISPENSER	FURNISHED BY OWNER	--	--	INSTALLED BY GC
3	TOILET TISSUE DISPENSER	FURNISHED BY OWNER	--	--	INSTALLED BY GC
4	PAPER TOWEL DISPENSER	FURNISHED BY OWNER	--	--	INSTALLED BY GC
5	MIRROR	AMERICAN SPECIALTIES INC.	#600 SERIES	24" x 36"	
6	BABY CHANGING TABLE	AMERICAN SPECIALTIES INC.	9012	36" x 22" x 4"	SURFACE MOUNTED

- NOTES:
- REFER TO FLOOR PLANS FOR QUANTITIES
 - CUT ALL REQUIRED OPENINGS IN MASONRY TO ACCOMMODATE RECESSED ACCESSORIES
 - ALL DIMENSIONS FROM FACE OF FINISHED FLOOR OR WALL

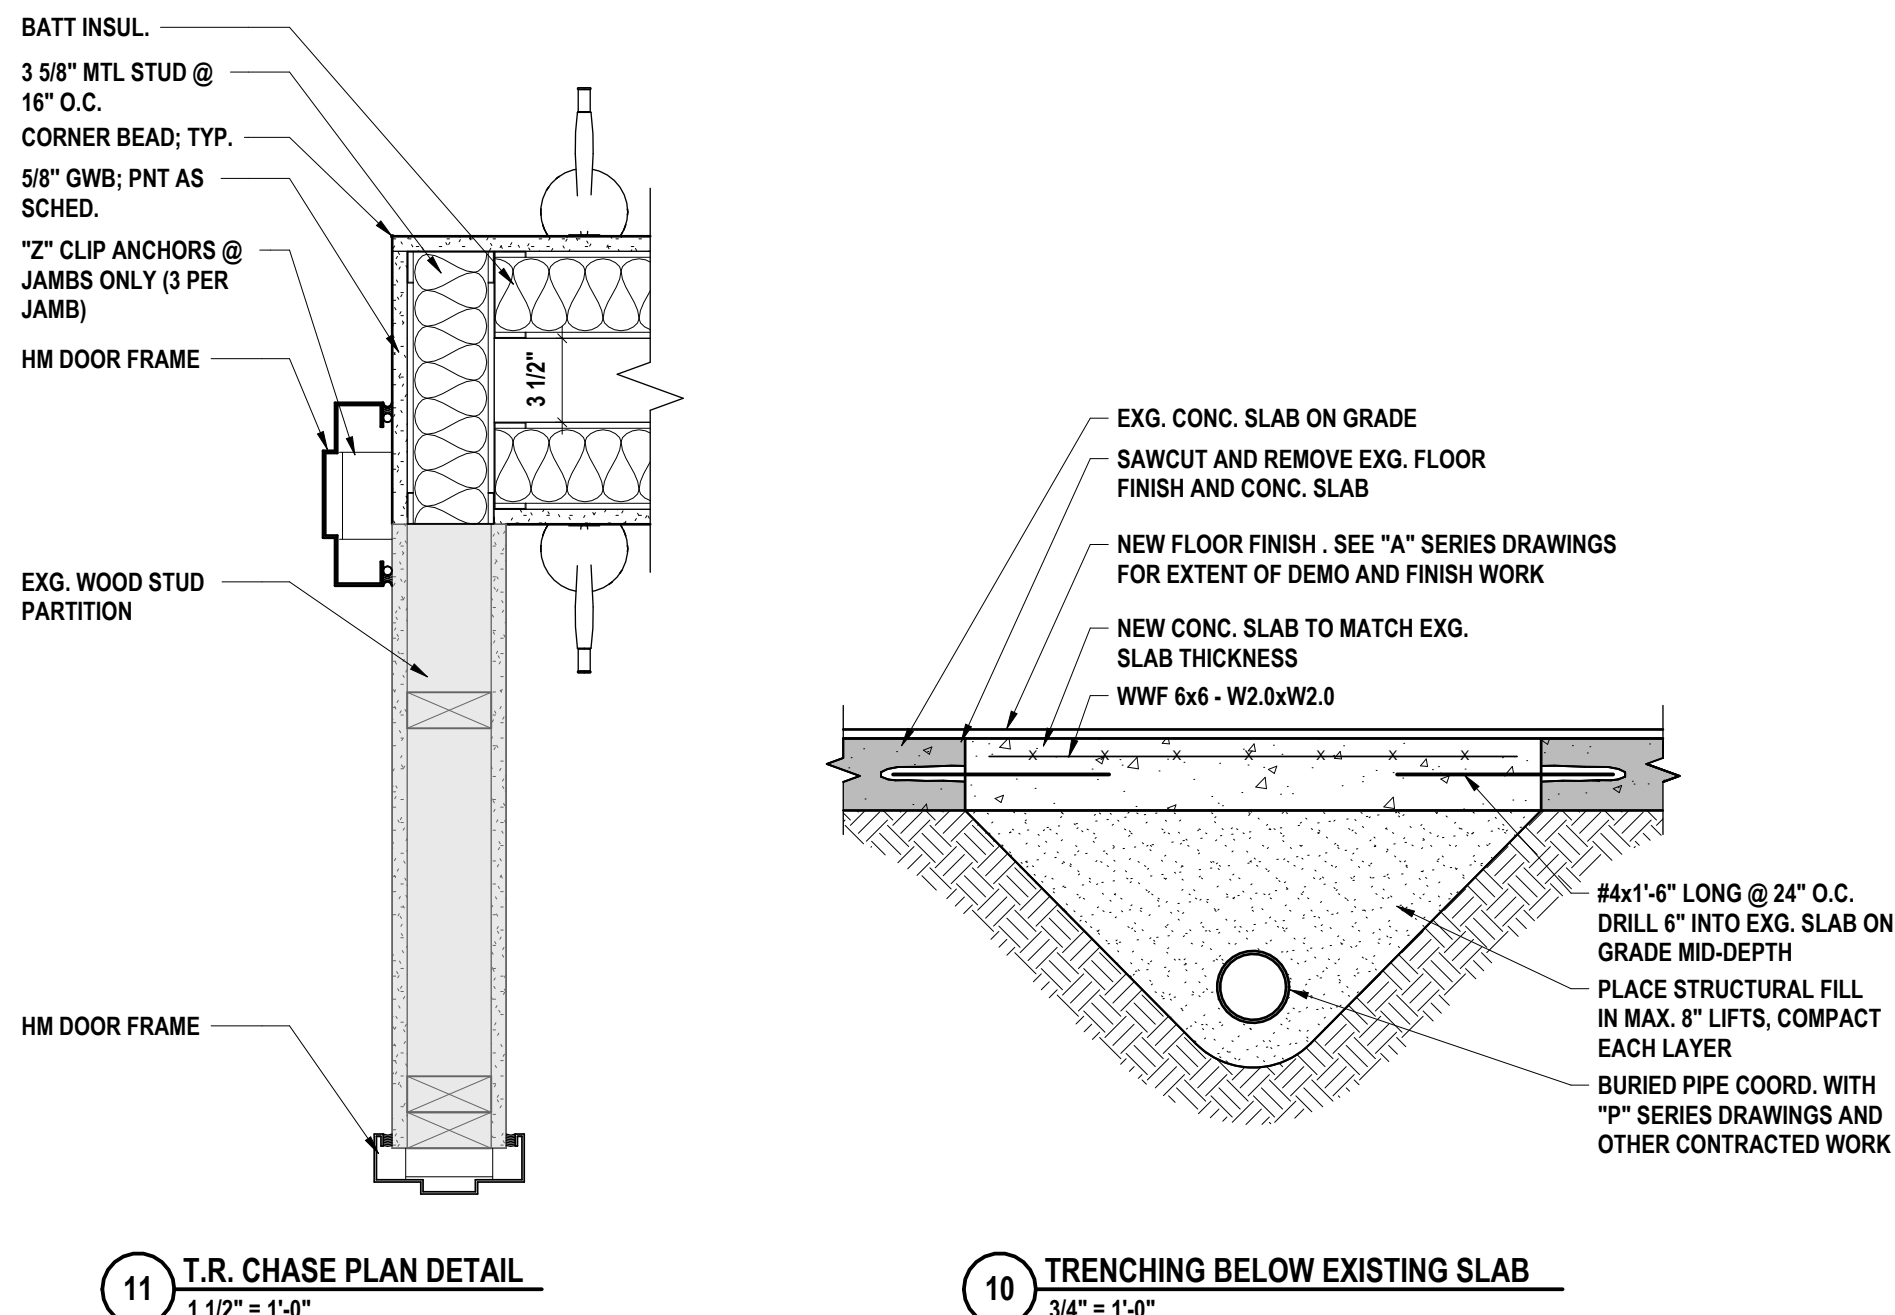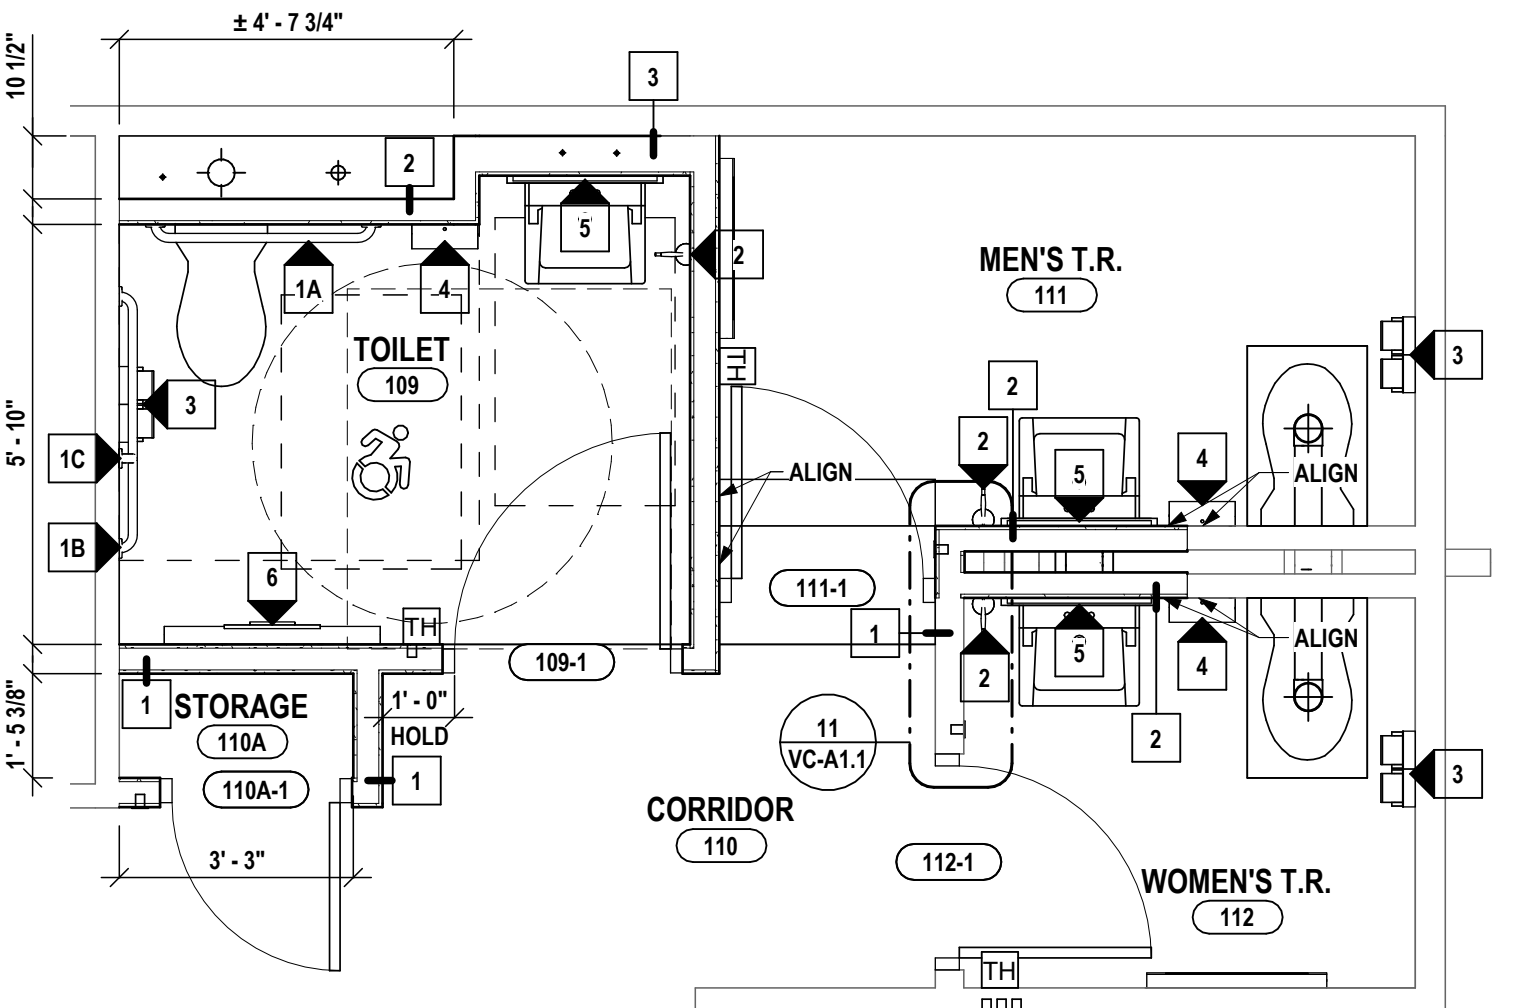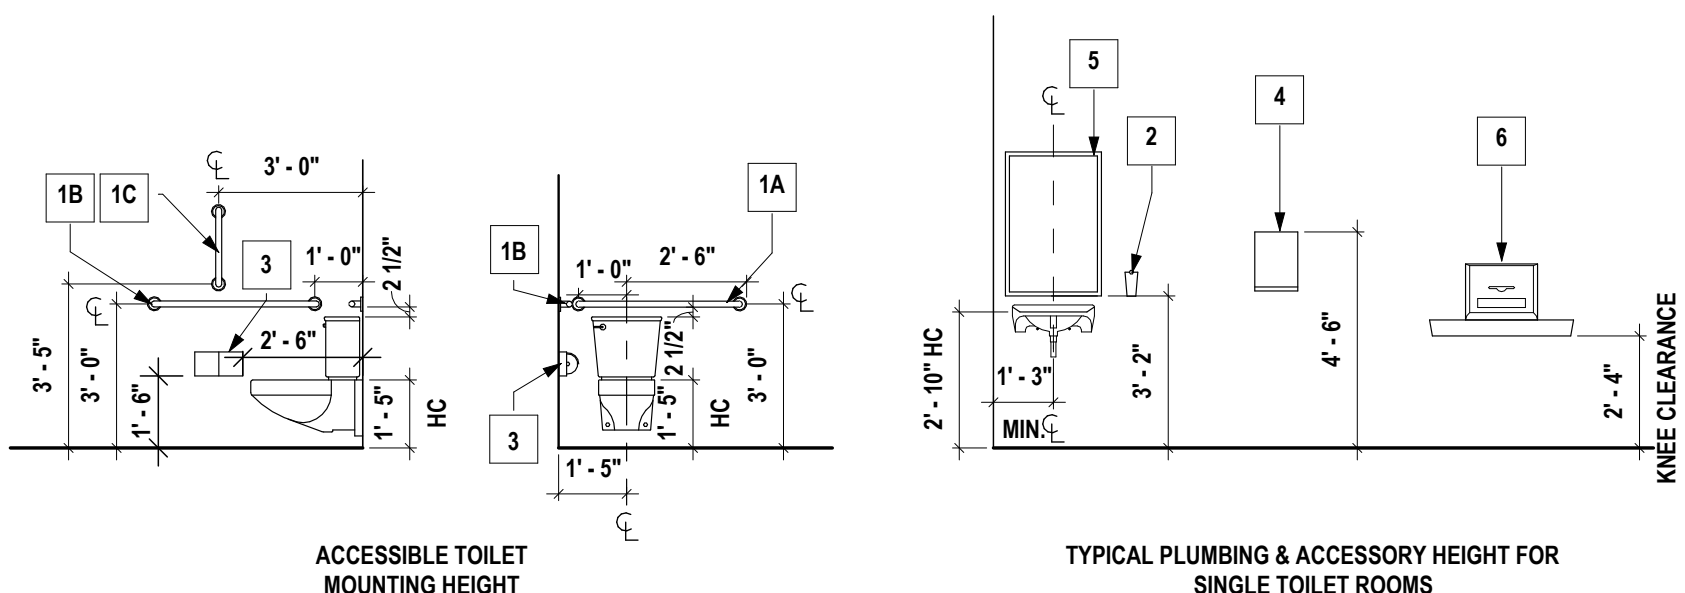


11 T.R. CHASE PLAN DETAIL
1 1/2" = 1'-0"

10 TRENCHING BELOW EXISTING SLAB
3/4" = 1'-0"


DOOR SCHEDULE

#	TYPE	SIZE	DOOR THICK.	MATL.	FINISH	ASSEMBLY LABEL	GLAZING MATL.	MARKING	HDWR SET	FRAME MATL.	FRAME TYPE	FRAME FINISH	DETAIL HEAD JAMB SILL	NOTES
106-1	A	2'-8" x 7'-0"	1 3/4"	WD	STN	--	--	--	3.0	HM	1	PNT	7VC-A1.1 6VC-A1.1 5VC-A1.1	REINSTALLED EXISING DOOR IN NEW LOCATION.
106-2	A	2'-8" x 7'-0"	1 3/4"	WD	STN	--	--	--	4.0	HM	1	PNT	7VC-A1.1 6VC-A1.1 5VC-A1.1	REUSE EXISTING KEYPAD IN NEW DOOR.
109-1	A	2'-0" x 7'-0"	1 3/4"	WD	STN	--	--	--	2.0	HM	1	PNT	4VC-A1.1 3VC-A1.1 5VC-A1.1	TOILET ROOM DOOR WITH PRIVACY INDICATOR.
110A-1	A	2'-4" x 7'-0"	1 3/4"	WD	STN	--	--	--	1.0	HM	1	PNT	4VC-A1.1 3VC-A1.1 5VC-A1.1	
111-1	A	2'-8" x 7'-0"	1 3/4"	WD	STN	--	--	--	2.0	HM	1	PNT	7VC-A1.1 6VC-A1.1 5VC-A1.1	TOILET ROOM DOOR WITH PRIVACY INDICATOR.
112-1	A	2'-8" x 7'-0"	1 3/4"	WD	STN	--	--	--	2.0	HM	1	PNT	7VC-A1.1 6VC-A1.1 5VC-A1.1	TOILET ROOM DOOR WITH PRIVACY INDICATOR.

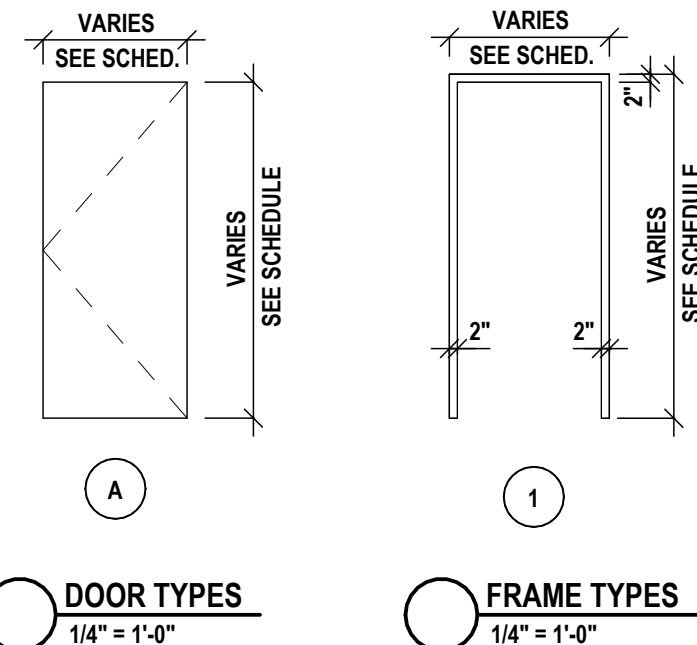


DOOR TYPES
1/4" = 1'-0"


FRAME TYPES
1/4" = 1'-0"

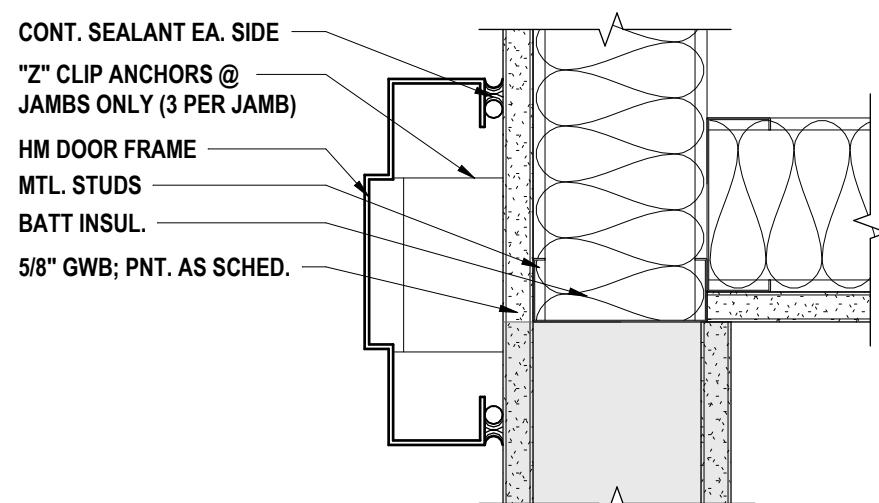


8 DOOR JAMB DETAIL - C
3" = 1'-0"

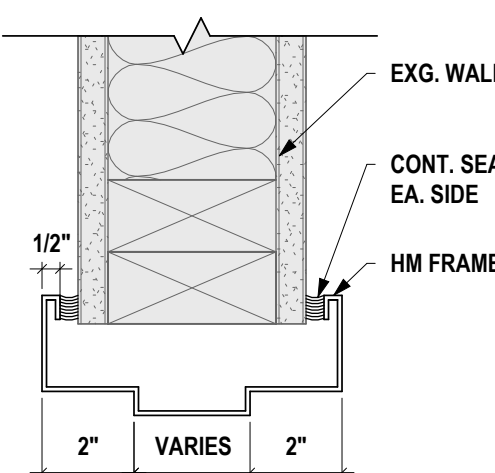


7 DOOR HEAD DETAIL - B
3" = 1'-0"

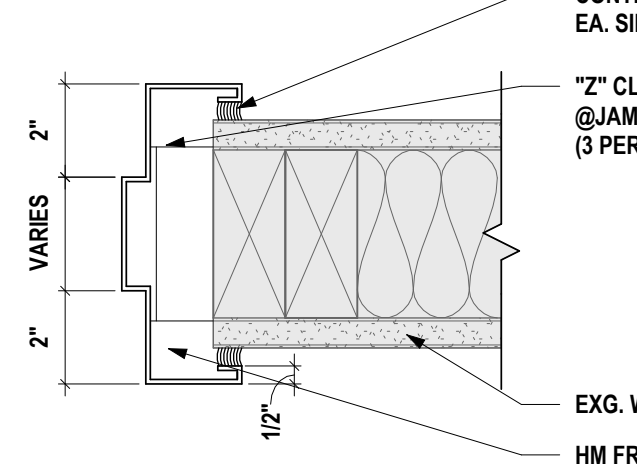


6 DOOR JAMB DETAIL - B
3" = 1'-0"

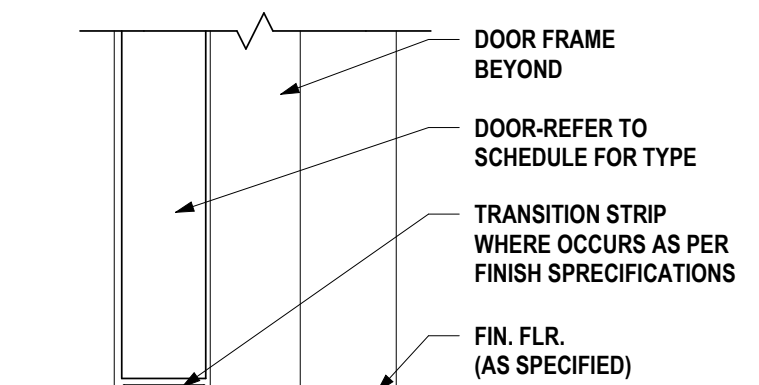

5 DOOR THRESHOLD DETAIL
3" = 1'-0"

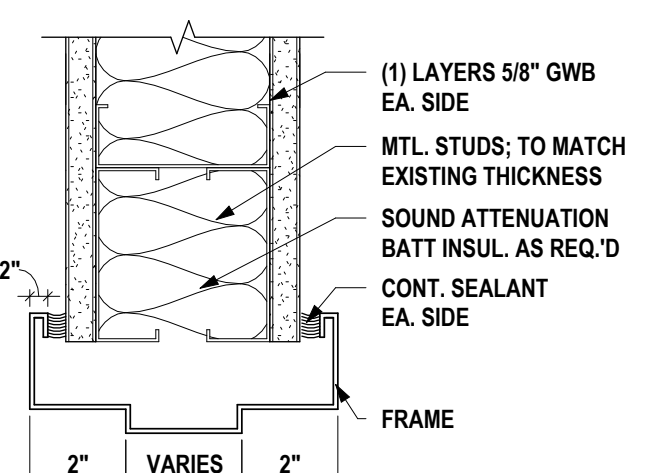


4 DOOR HEAD DETAIL - A
3" = 1'-0"

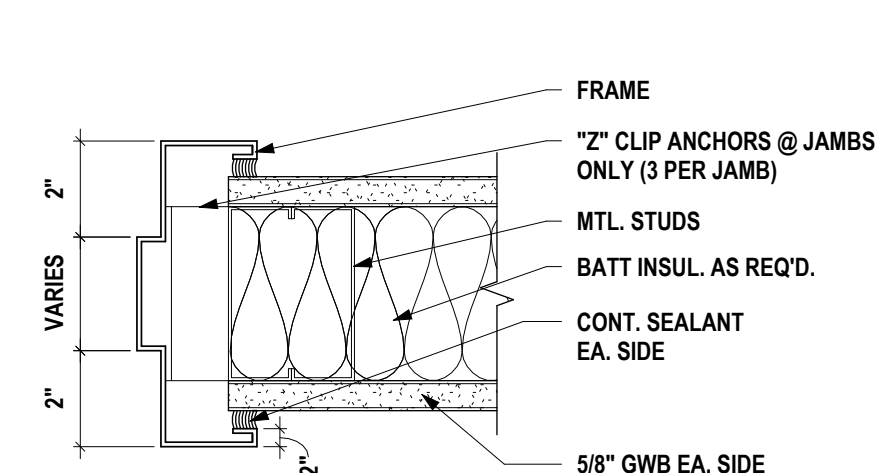

3 DOOR JAMB DETAIL - A
3" = 1'-0"


FIRST FLOOR REFLECTED CEILING PLAN


1/8" = 1'-0"

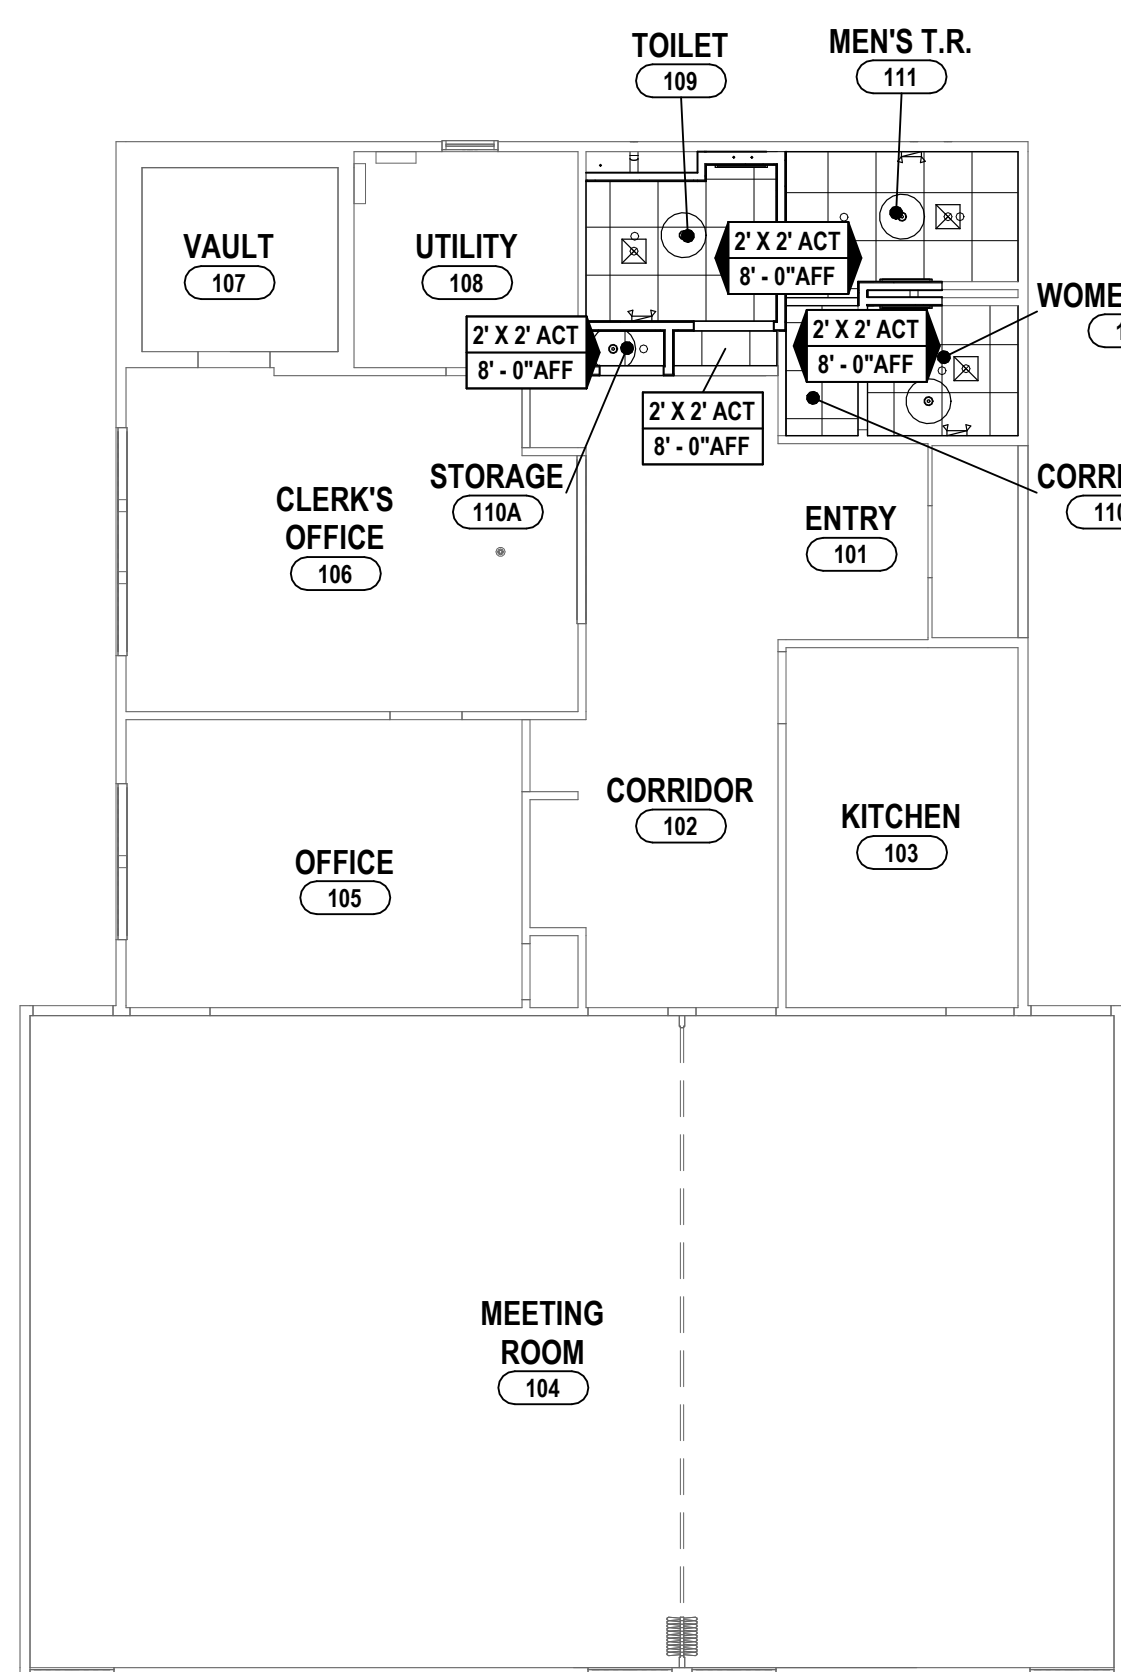

FIRST FLOOR PLAN


1/8" = 1'-0"

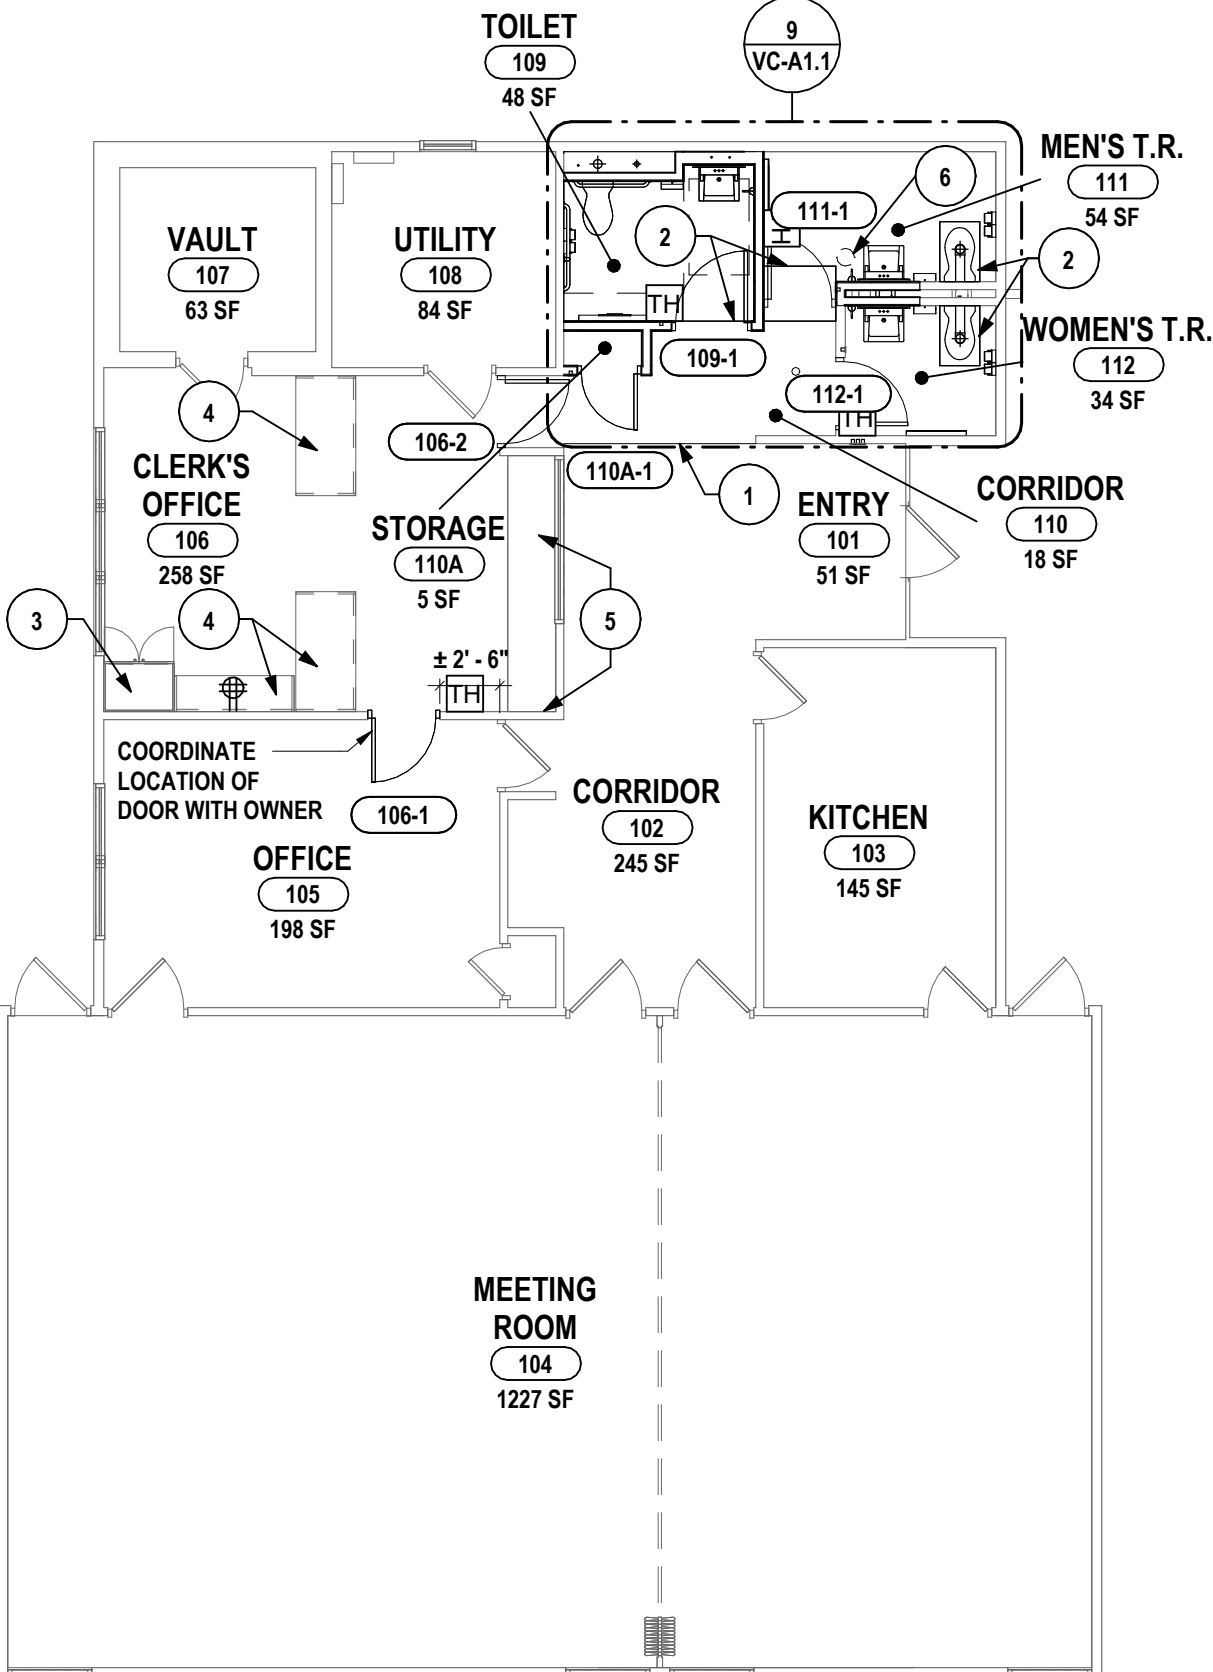

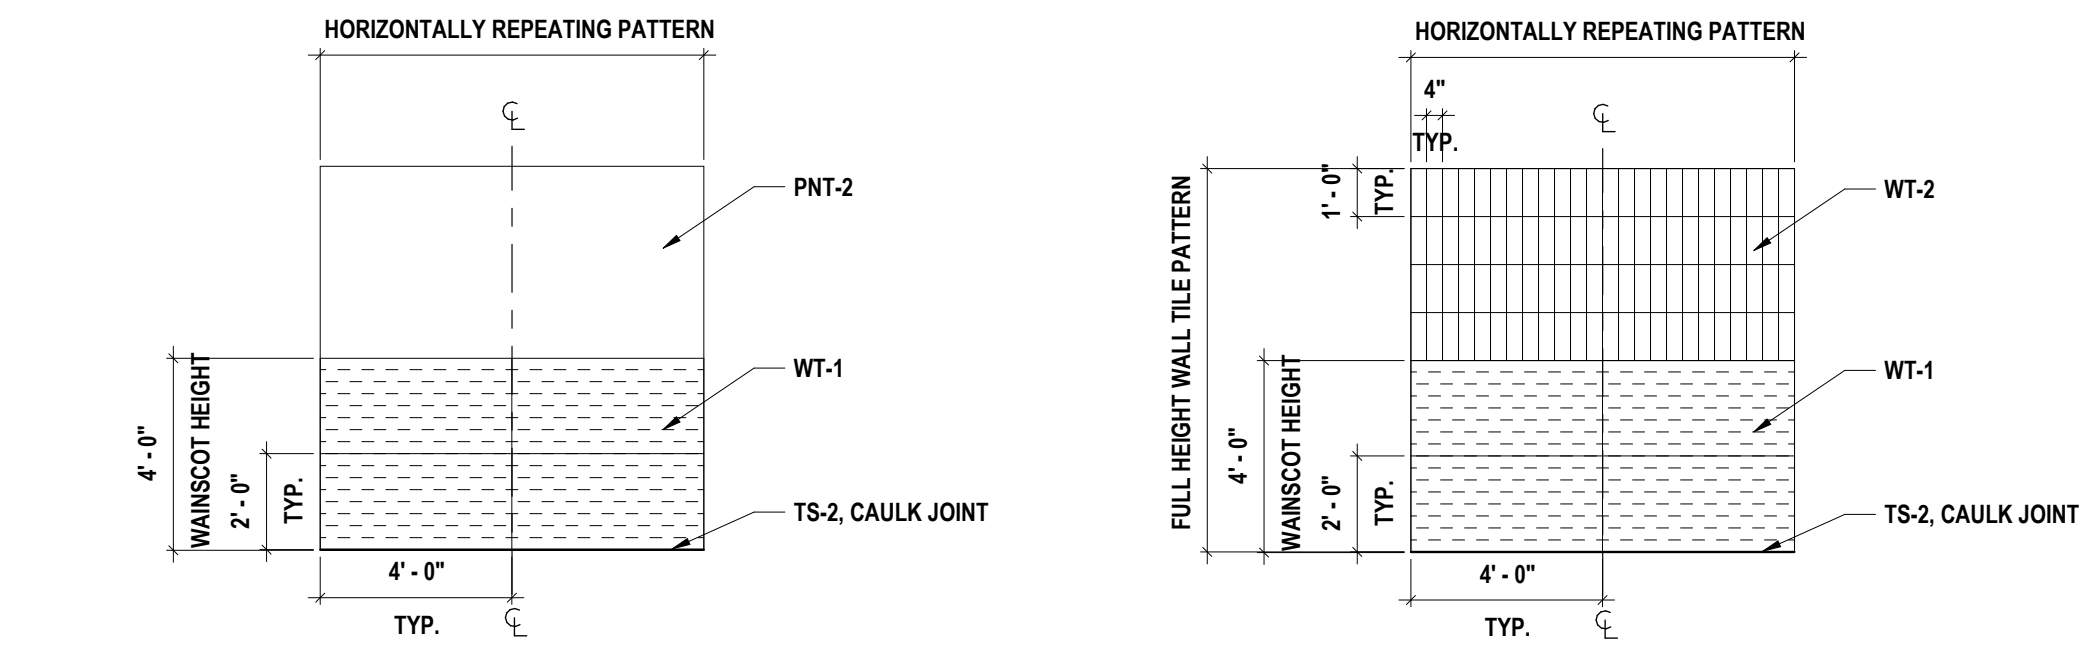


7 ALTERNATE #1 - TYPICAL RESTROOM WALL TILE PATTERN
1/4" = 1'-0"

6 BASE BID - TYPICAL RESTROOM WALL TILE PATTERN
1/4" = 1'-0"

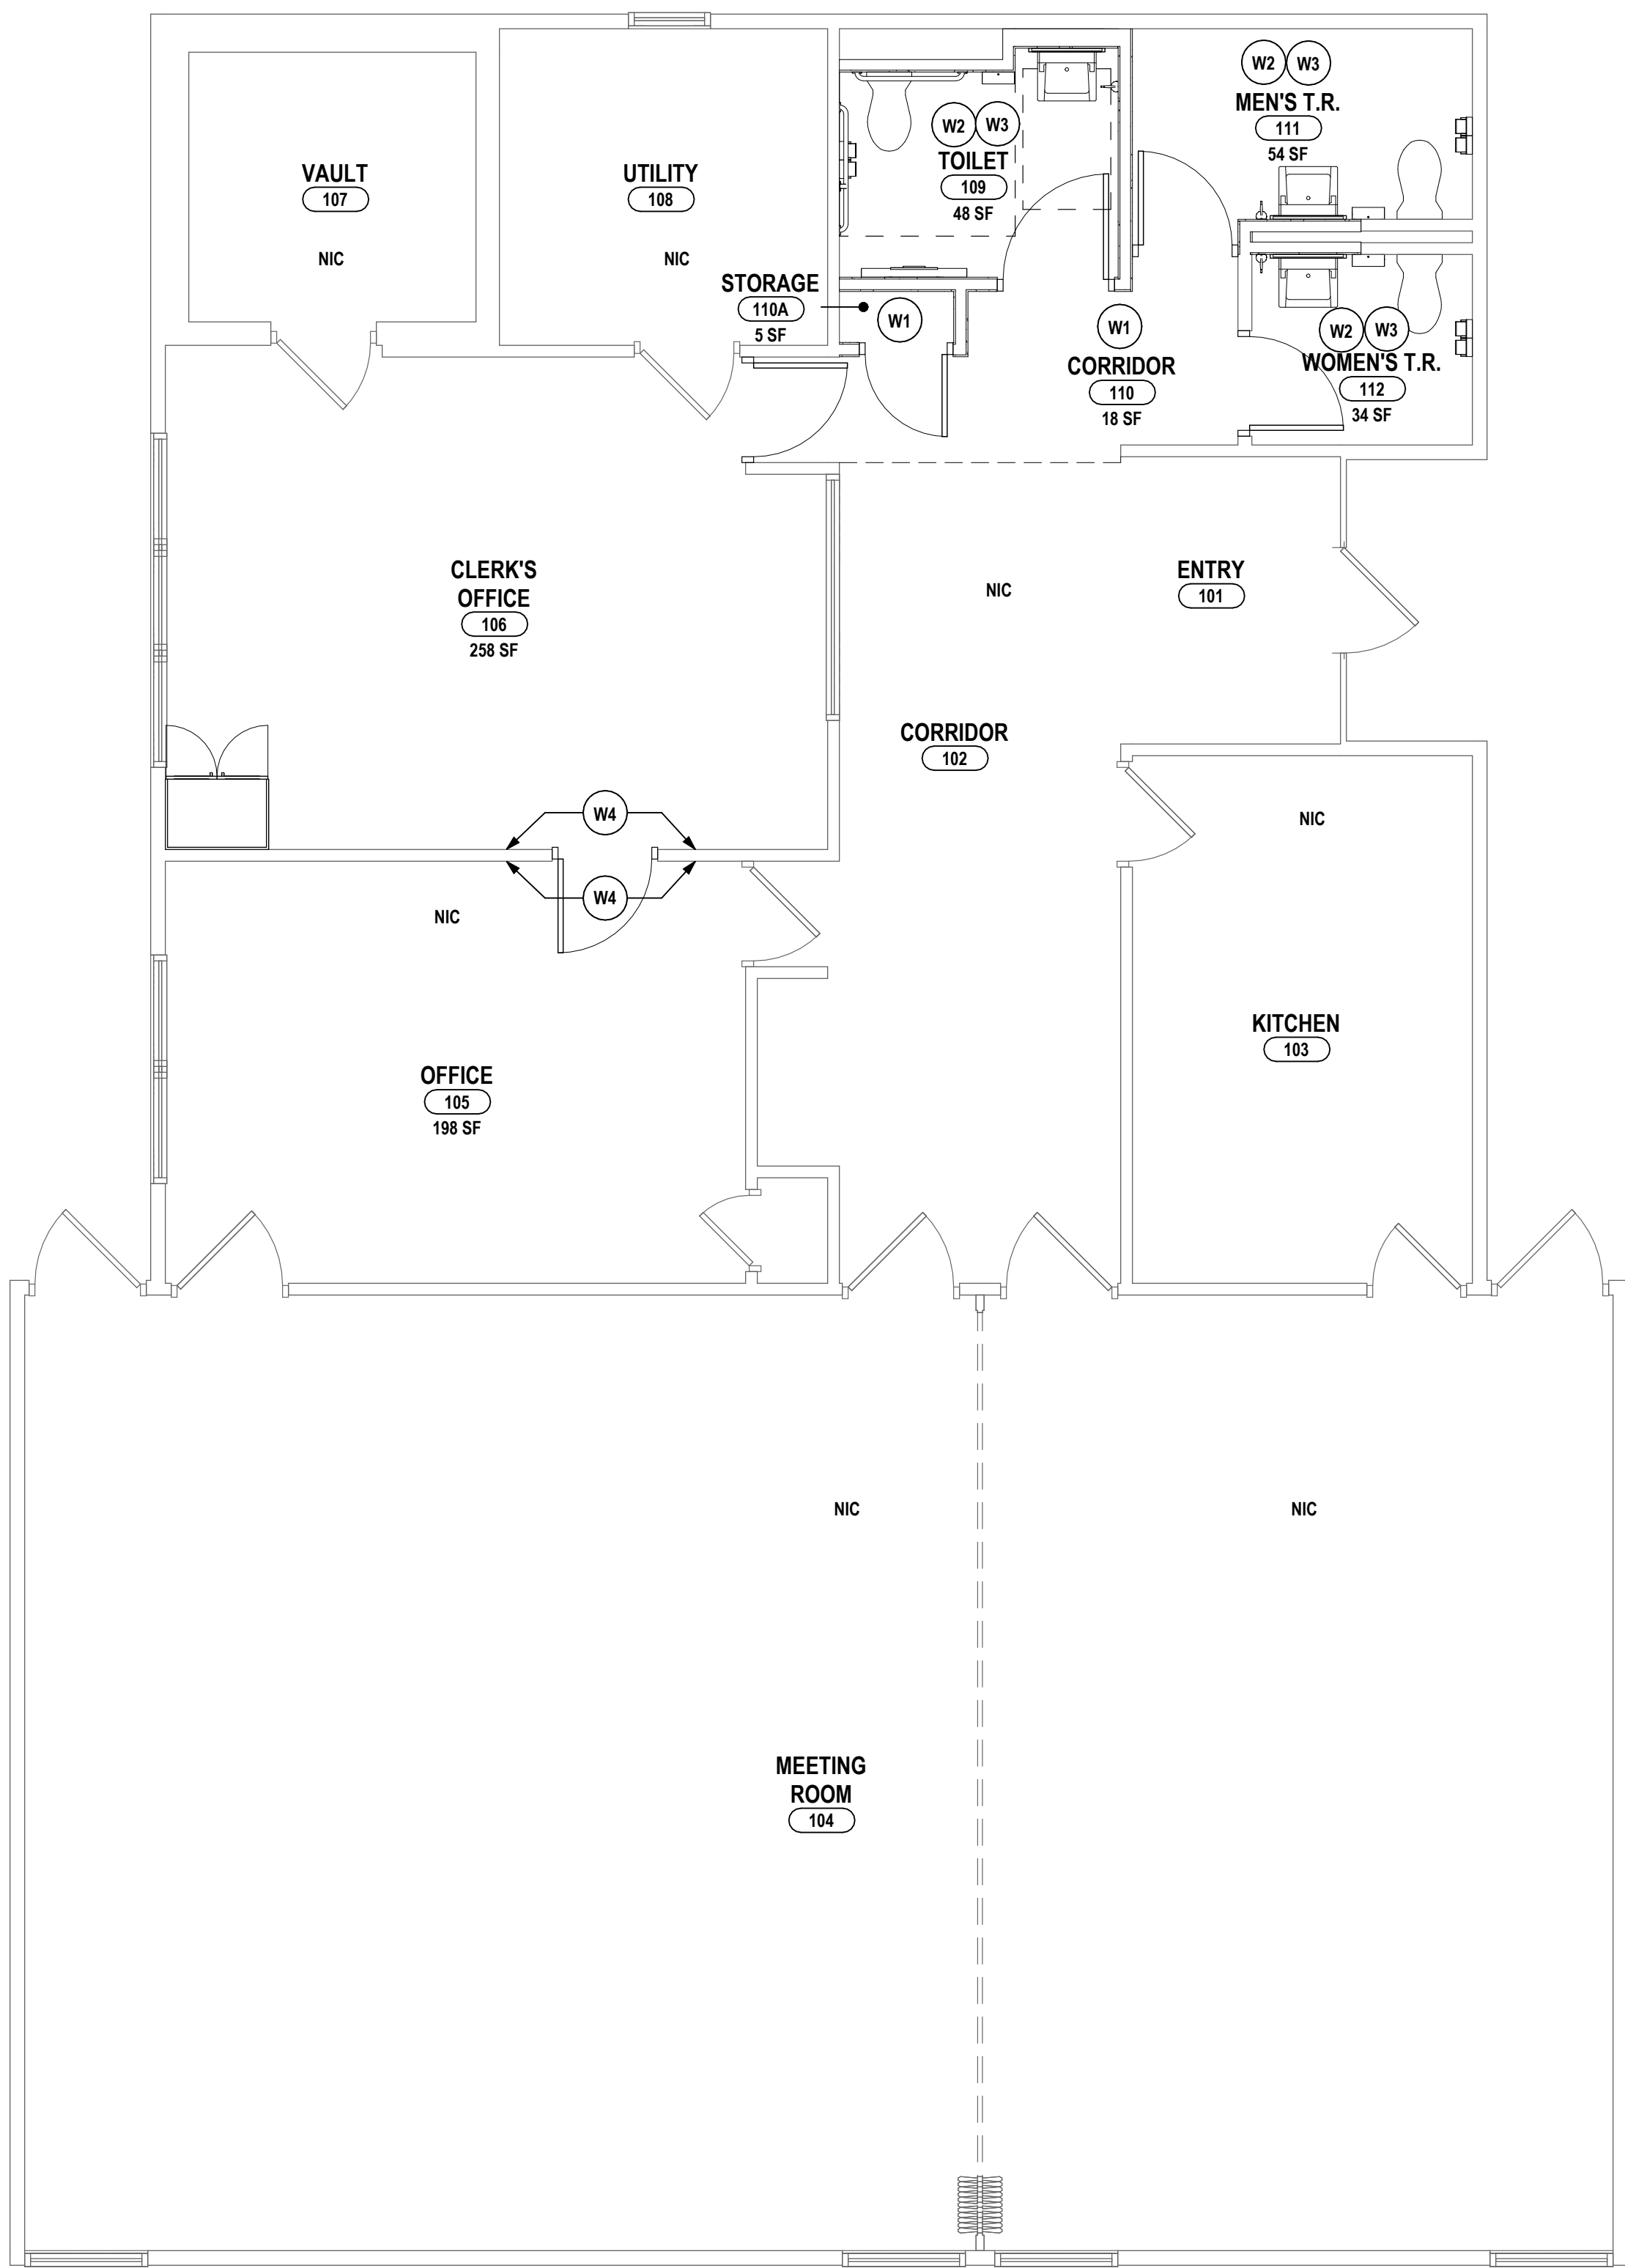


4 FIRST FLOOR WALL FINISH PLAN
1/4" = 1'-0"

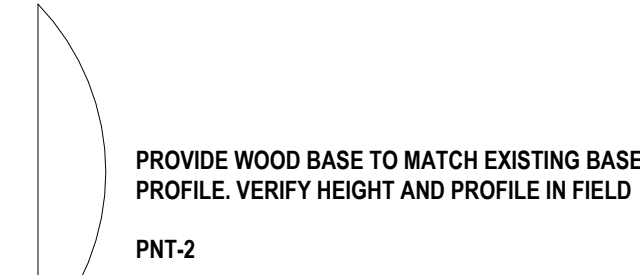


5 WOOD BASE
1/2" = 1'-0"




3 CLERKS OFFICE FLOOR PATTERN
1/2" = 1'-0"

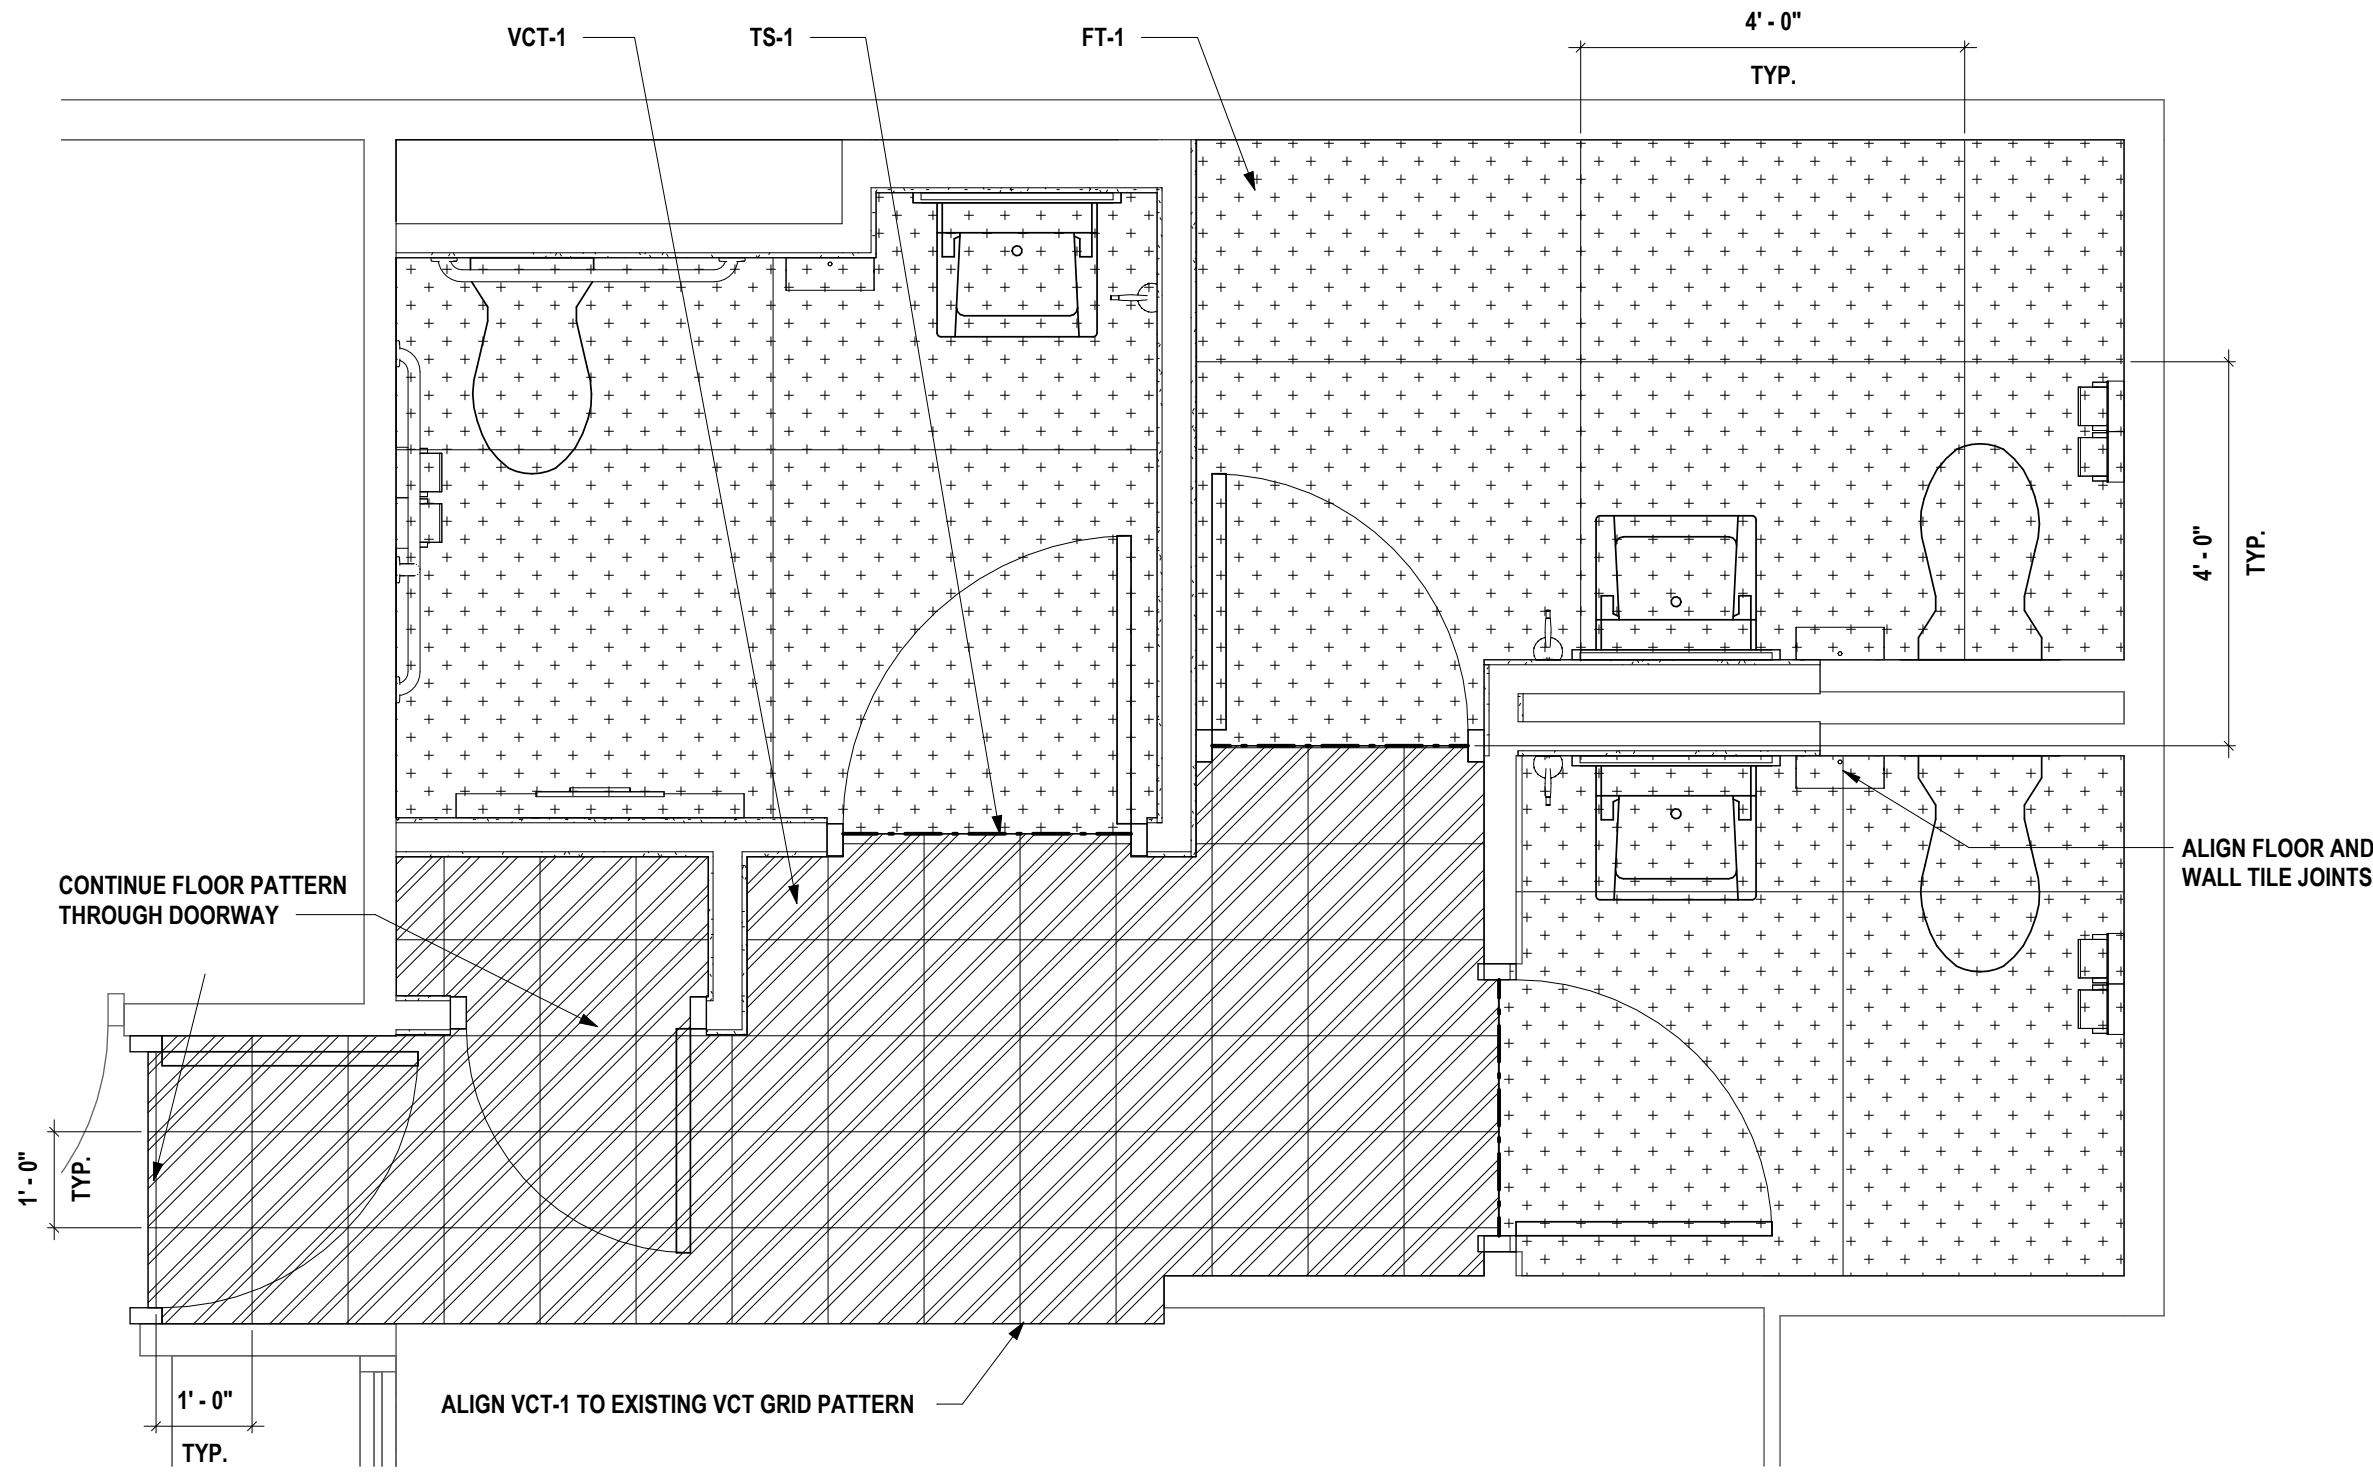

2 RESTROOM AND CORRIDOR FLOOR PATTERN
1/2" = 1'-0"

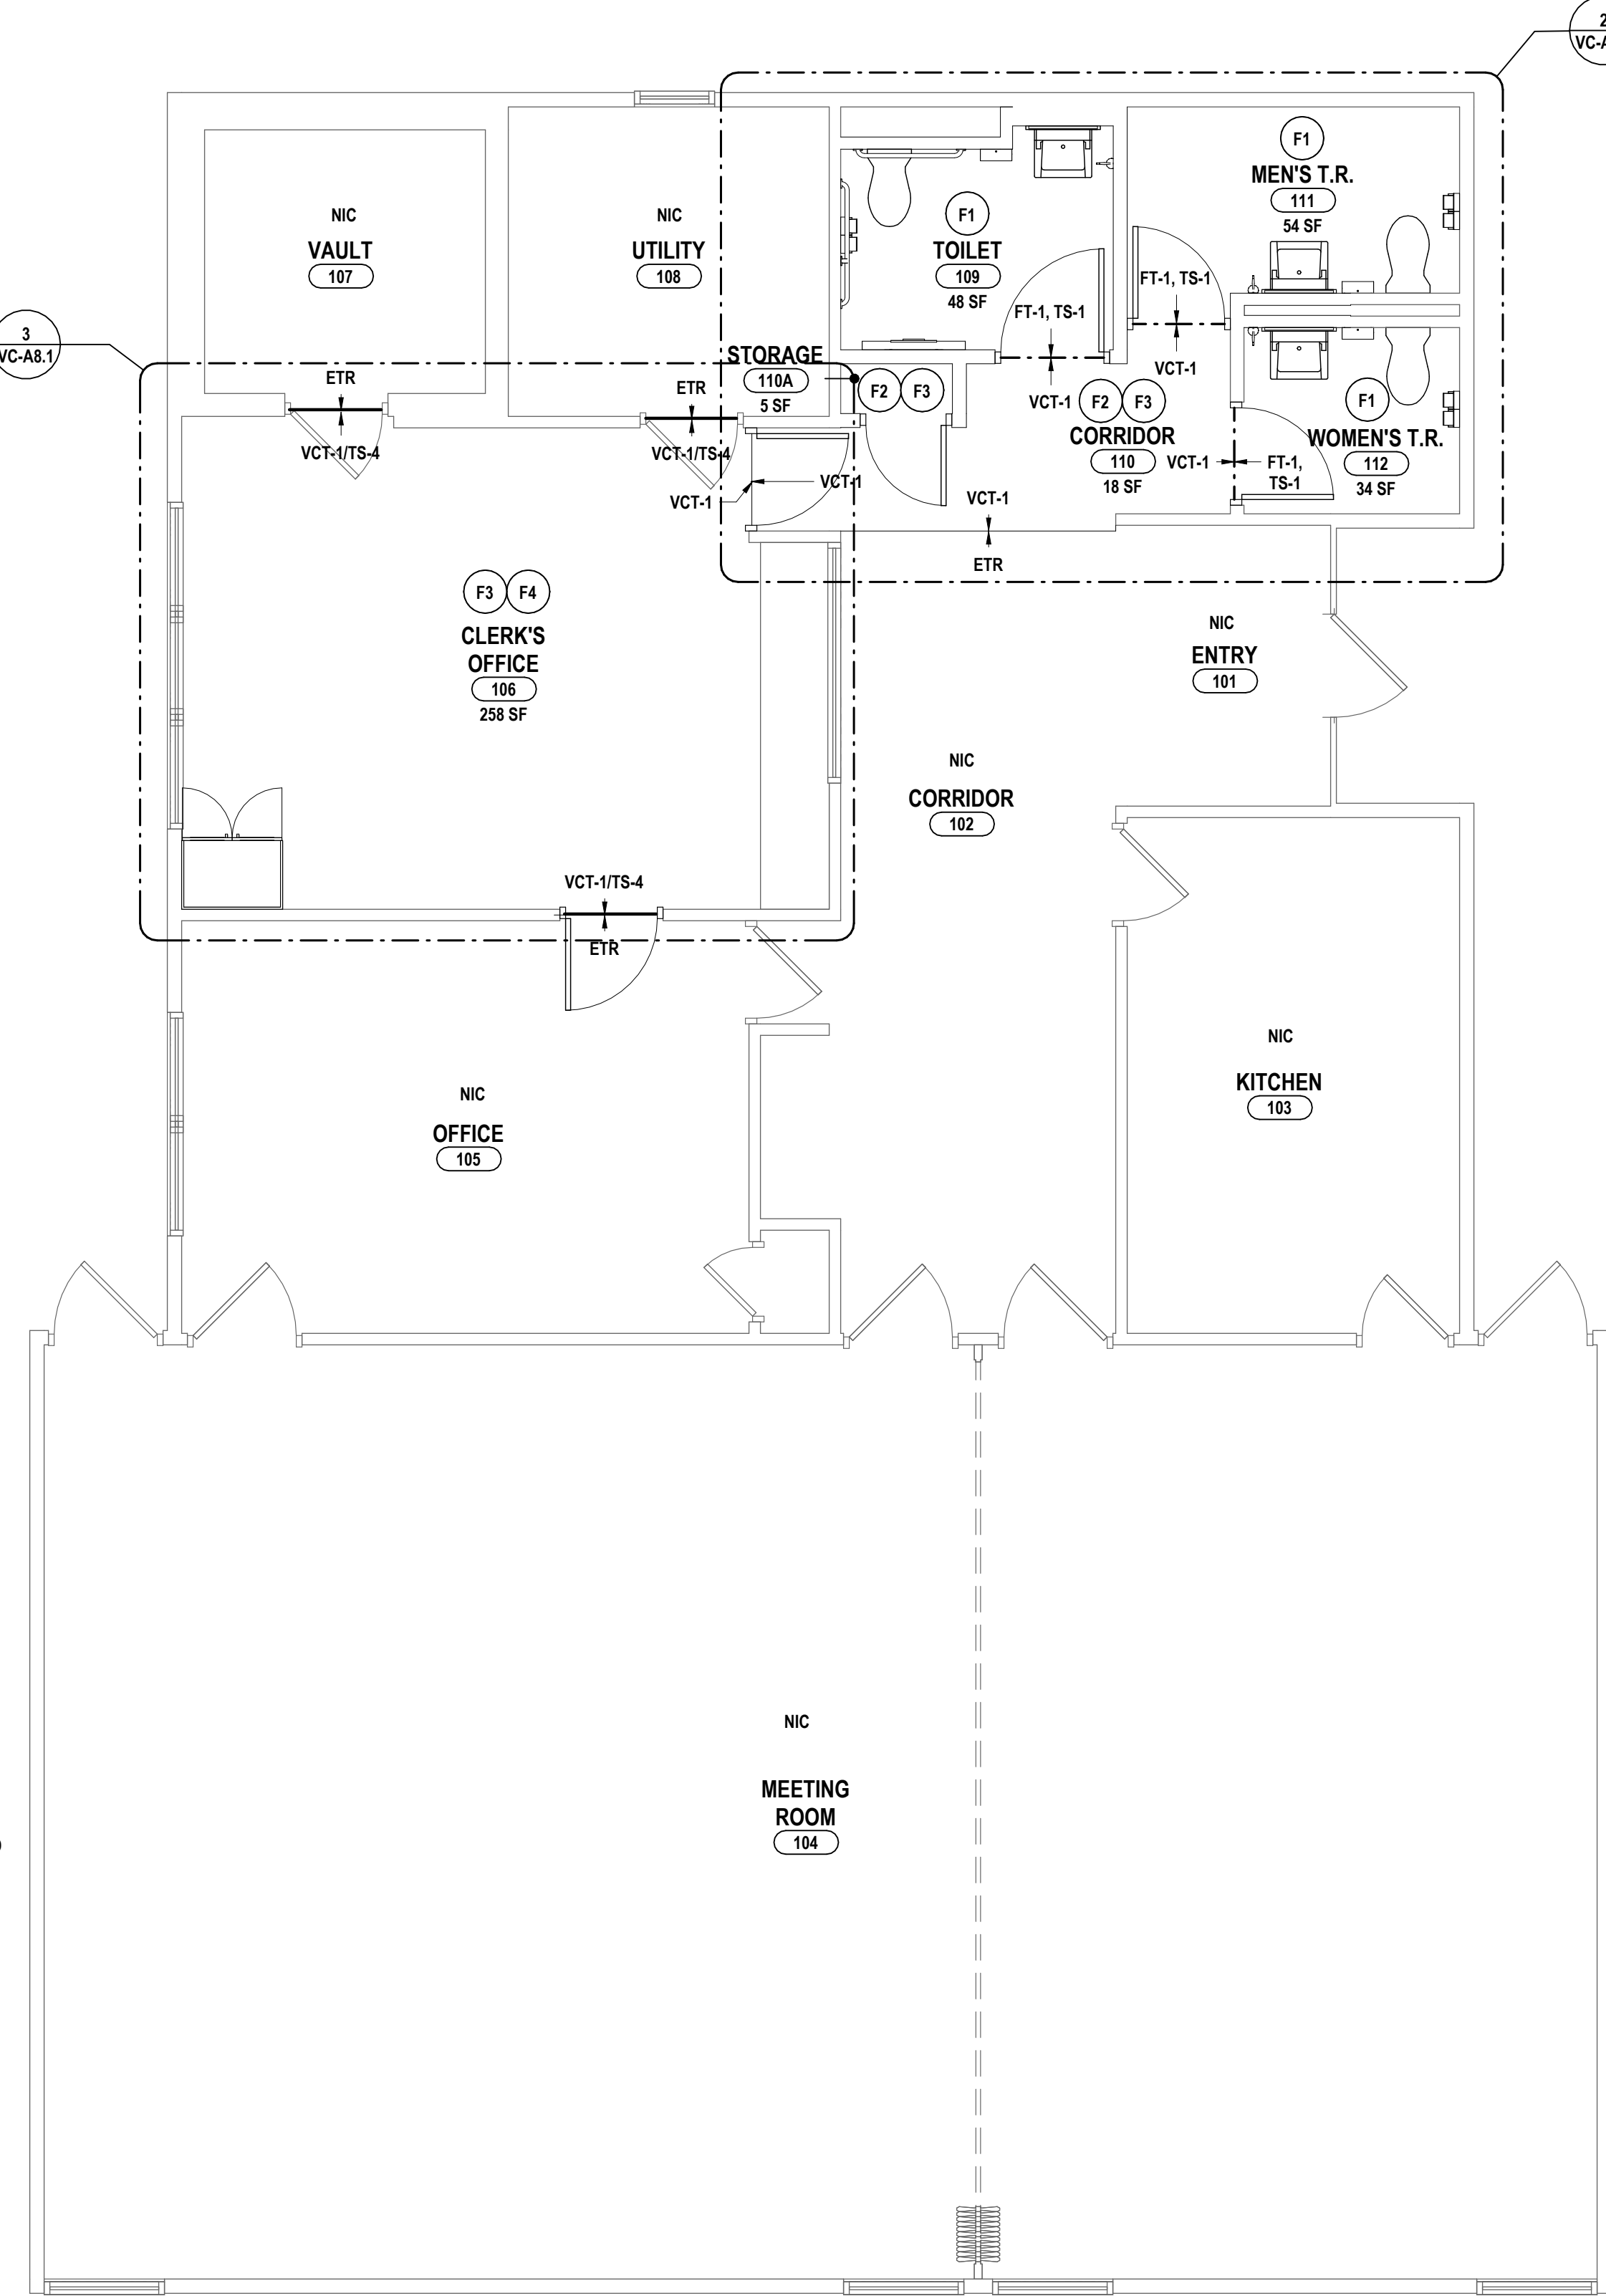

1 FIRST FLOOR FINISH PLAN
1/4" = 1'-0"

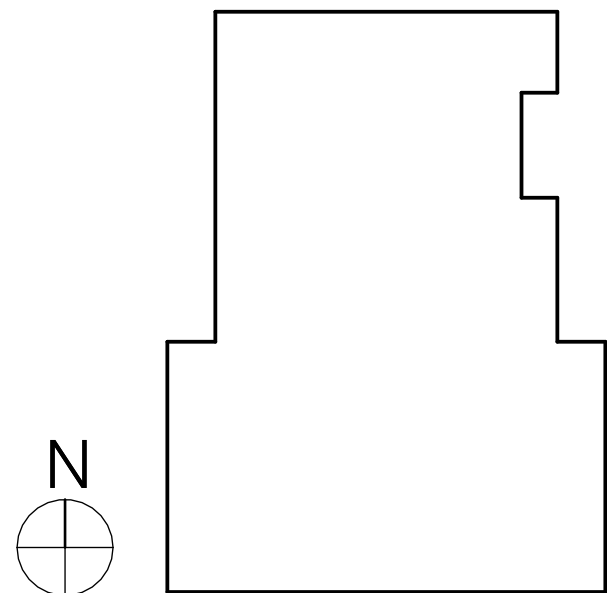


GENERAL NOTES - INTERIOR WALL FINISH:

- A DRAWINGS REPRESENT LOCATIONS OF NEW WALL FINISHES AND INDICATE PATTERNS FOR INSTALLATION. FOR A COMPLETE LIST OF FINISHES, REFER TO THE FINISH KEY AND ROOM FINISH SCHEDULE.
- B REFER TO A2 DRAWINGS FOR CEILING HEIGHTS. VERIFY CEILING HEIGHTS IN THE FIELD PRIOR TO START OF WORK.
- C PAINT ALL UNFINISHED EXPOSED HVAC EQUIPMENT INCLUDING DUCTWORK, AIR DIFFUSERS AND RETURNS AT CEILING PLANE TO MATCH ADJACENT CEILING FINISH/COLOR. ARCHITECT TO SELECT COLOR.
- D REFER TO WALL FINISH LEGEND AND ELEVATIONS FOR FINISHES THAT REQUIRE ADDITIONAL INFORMATION REGARDING EXTENTS OR INSTALLATION PATTERNING.
- E PAINT ALL NEW INTERIOR WINDOW TRIM AND DOOR FRAMES. REFER TO FINISH KEY FOR COLORS.

CONSTRUCTION NOTES - INTERIOR WALL FINISH:

- W1 ALL WALLS TO RECEIVE PAINT, PNT-1.
- W2 BASE BID: ALL RESTROOM WALLS TO RECEIVE TILE, WT-1,2. REFER SVC-A8.1 FOR INSTALLATION PATTERN. PROVIDE TS-3 AT EXPOSED EDGES.
- W3 ALTERNATE #1: ALL RESTROOM WALLS TO RECEIVE WT-1 AT WAINSCOT HEIGHT AND PNT-4 ABOVE. PROVIDE TS-3 AT EXPOSED TILE EDGES. REFER TO SVC-A8.1
- W4 PATCH TO MATCH EXISTING ADJACENT WALL AND BASE FINISHES WHERE NEW WORK HAS AFFECTED EXISTING CONDITIONS.

WALL FINISH LEGEND




GENERAL NOTES - INTERIOR FLOOR FINISH:


- A ALL FLOOR FINISHES, WITH THE EXCEPTION OF CARPET, SHALL BE INSTALLED EXTENDING COMPLETELY UNDER NEW BUILT-IN CASEWORK, EVEN WHEN NOT SHOWN ON FLOOR FINISH PLANS.
- B ALL FLOOR FINISHES TO TRANSITION AT CENTERLINE OF DOOR JAMB UNLESS OTHERWISE NOTED ON FLOOR FINISH PLANS.
- C FLOOR FINISHES TO EXTEND UNDERNEATH COUNTERTOPS WHERE FLOORING WOULD OTHERWISE BE EXPOSED.
- D REFER TO FINISH KEY AND ROOM FINISH SCHEDULE FOR ALL FINISHES NOT INDICATED ON FLOOR FINISH PLANS.
- E PREP FLOORS ACCORDING TO SPECIFICATION 09 05 61, "COMMON WORK RESULTS FOR FLOOR PREPARATION".
- F SLOPE ALL FLOOR TILE TO FLOOR DRAINS AS REQUIRED. REFER TO PLUMBING AND STRUCTURAL DRAWINGS FOR DETAILS.
- G PROVIDE ADA COMPLIANT TRANSITION STRIP WHEN ADJUTING FLOOR FINISHES DIFFER IN THICKNESS OR MATERIAL. REFER TO FINISH KEY AND ROOM FINISH SCHEDULE FOR DETAILS.

CONSTRUCTION NOTES - INTERIOR FLOOR FINISH:

- F1 FLOOR TO RECEIVE FT-1 IN GRID INSTALLATION PATTERN. REFER TO 2/AVC-A8.1 FOR INSTALLATION DETAILS. PROVIDE CAULK JOINT AS WALL BASE.
- F2 FLOOR TO RECEIVE VCT-1 IN GRID INSTALLATION PATTERN. PROVIDE WB-1 AS BASE WITH PNT-2. REFER TO 2/VC-A8.1 FOR INSTALLATION DETAILS.
- F3 PROVIDE RUBBER BASE, RB-1.
- F4 FLOOR TO RECEIVE VCT-1 IN GRID INSTALLATION PATTERN. REFER TO 3/VC-8.2 FOR INSTALLATION DETAILS.


FLOOR FINISH LEGEND



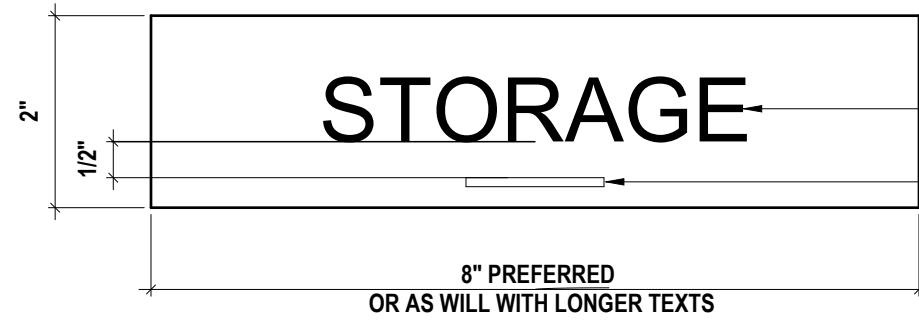

4 TYPE-4 PERMANENT NAME, NO NUMBER
6" x 1'-0"

NOTE:
ALL PERMANENT ROOM IDENTIFICATION SIGNS
SHALL COMPLY WITH THE 2010 ADA
STANDARDS FOR ACCESSIBLE DESIGN AND ICC
A117.1.
MOUNT TACTILE CHARACTER BASELINES 48"
MIN. TO 60" MAX. AFF.

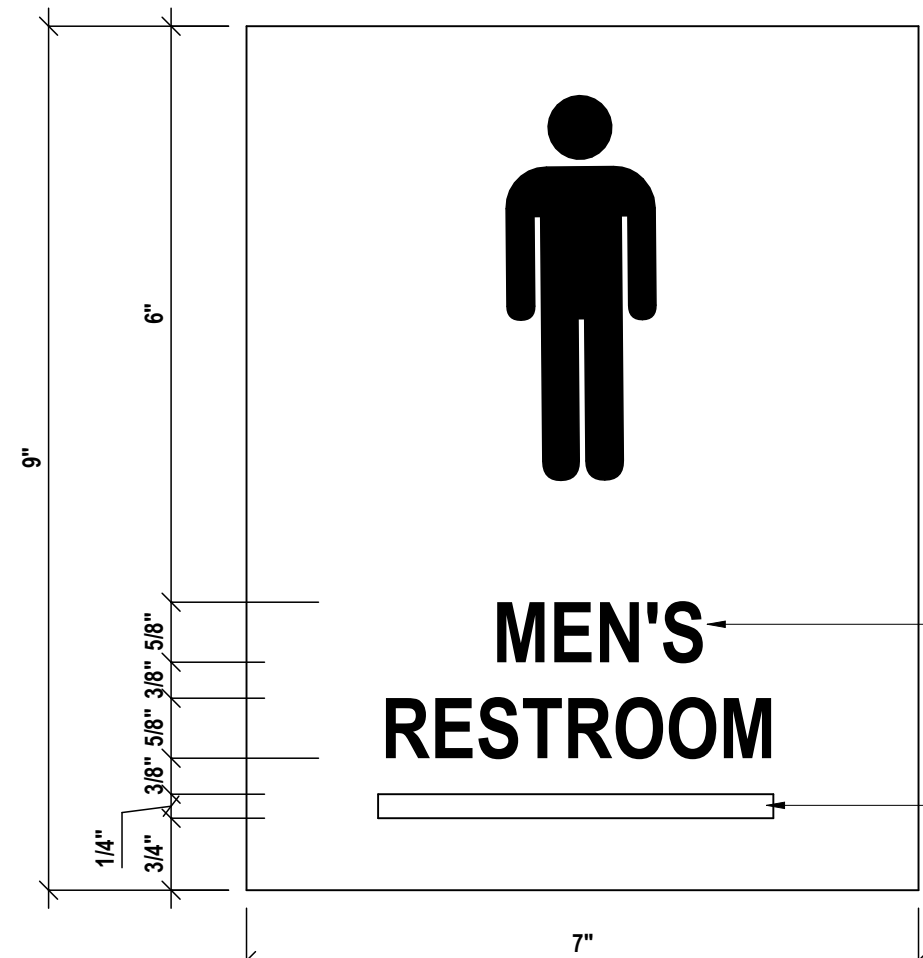

3 TYPE-3 MEN'S RESTROOM, NON-ACCESSIBLE
6" x 1'-0"

NOTE:
ALL PERMANENT ROOM IDENTIFICATION SIGNS
SHALL COMPLY WITH THE 2010 ADA
STANDARDS FOR ACCESSIBLE DESIGN AND ICC
A117.1.
MOUNT TACTILE CHARACTER BASELINES 48"
MIN. TO 60" MAX. AFF.



2 TYPE-2 WOMEN'S RESTROOM, NON-ACCESSIBLE
6" x 1'-0"

NOTE:
ALL PERMANENT ROOM IDENTIFICATION SIGNS
SHALL COMPLY WITH THE 2010 ADA
STANDARDS FOR ACCESSIBLE DESIGN AND ICC
A117.1.
MOUNT TACTILE CHARACTER BASELINES 48"
MIN. TO 60" MAX. AFF.



1 TYPE-1 ALL GENDER RESTROOM, ACCESSIBLE
6" x 1'-0"

NOTE:
ALL PERMANENT ROOM IDENTIFICATION SIGNS
SHALL COMPLY WITH THE 2010 ADA
STANDARDS FOR ACCESSIBLE DESIGN AND ICC
A117.1.
MOUNT TACTILE CHARACTER BASELINES 48"
MIN. TO 60" MAX. AFF.

FINISH KEY								
ABBR.	MATERIAL TYPE	MANUFACTURER	SERIES	SIZE	NUMBER	COLOR	SECTION #	LOCATION / REMARKS
BASE								
RB-1	RUBBER BASE	ROPPE	700 SERIES	VIF	MARINER	627	09 65 00	CLERKS OFFICE METAL CABINETS
WB-1	WOOD BASE	-	-	VIF	-	PNT-2	09 64 29	CLERKS OFFICE AND CORRIDOR - REF 5VC-A8.1
CEILING SYSTEM								
ACT-1	ACOUSTICAL TILE	ARMSTRONG CEILINGS	ULTIMA HEALTH ZONE	24" x 24"	1445	WHITE	09 51 00	
FLOOR TILE								
FT-1	PORCELAIN TILE	TILE BAR	BOSCATO	48" X 48"	-	CREAM - MATTE	09 30 00	RESTROOM FLOORS
GROUT								
G-1	GROUT	LATICRETE	PERMACOLOR	-	97	IRON	09 30 00	WALL TILE
G-2	GROUT	LATICRETE	SPECTRALOCK - PRO PREMIUM GROUT	-	97	IRON	09 30 00	FLOOR TILE
LUXURY VINYL FLOORING								
VCT-1	VINYL COMPOSITE TILE	TARKETT	VCT II	12" X 12"	873	DAYLIGHT	09 65 00	CORRIDOR, STORAGE, CLERKS OFFICE
PAINT								
PNT-1	PAINT	SHERWIN WILLIAMS	-	-	SW 7005	PURE WHITE	09 91 23	WALLS - SATIN FINISH
PNT-2	PAINT	SHERWIN WILLIAMS	-	-	SW 7005	PURE WHITE	09 91 23	TRIM - SEMI GLOSS FINISH
PNT-3	PAINT	SHERWIN WILLIAMS	-	-	SW 7757	HIGH REFLECTIVE WHITE	09 91 23	SOFFITS
PNT-4	PAINT	SHERWIN WILLIAMS	-	-	SW 6516	DOWN POUR	09 91 23	ALTERNATE #1: RESTROOM WALLS - SATIN FINISH
TRANSITION STRIP								
TS-1	STAINLESS STEEL	SCHLUTER SYSTEMS	RENO-U	-	EBTK-80	BRUSHED STAINLESS STEEL	09 30 00	FLOOR TILE TO VCT TRANSITION
TS-2	CAULK JOINT	LATICRETE	LATASIL	-	ARCHITECT TO SELECT	ARCHITECT TO SELECT	09 30 00	WALL TILE TO FLOOR TILE TRANSITION
TS-3	STAINLESS STEEL	SCHLUTER SYSTEMS	JOLLY	-	ARCHITECT TO SELECT	ARCHITECT TO SELECT	09 30 00	WALL TILE EXPOSED EDGES AND OUTSIDE CORNERS
TS-4	VINYL	JOHNSONITE	SLIM TRIM TRANSITION	-	ARCHITECT TO SELECT	ARCHITECT TO SELECT	09 65 00	EXISTING CARPET TO VCT
WALL TILE								
WT-1	PORCELAIN TILE	TILE BAR	BOSCATO	24" X 48"	-	CREAM - MATTE	09 30 00	4" WAINSCOT
WT-2	PORCELAIN TILE	TILE BAR	PARK HILL	4" X 12"	-	BLUE	09 30 00	BASE BID: ACCENT ABOVE WAINSCOT

ROOM FINISH SCHEDULE							
ROOM #	ROOM NAME	FLOOR FINISH	BASE FINISH	WALL FINISH	DOOR FRAME COLOR	CEILING FINISH	REMARKS
AREA A							
105	OFFICE	ETR	ETR/PTM	ETR/PTM	ETR/PNT-2	ETR	PATCH TO MATCH FINISHED AFFECTED BY NEW WORK
106	CLERK'S OFFICE	VCT-1	ETR/WD-1, PTM	ETR, PTM	PNT-2	ETR	
109	TOILET	FT-1, TS-1	TS-2	BASE BID: WT-1,2, TS-3 ALT: WT-1, PNT-4, TS-3	PNT-2	ACT-1	
110	CORRIDOR	ETR, VCT-1, TS-1	ETR /WD-1	PNT-1	ETR, PNT-2	ETR, ACT-1, PNT-3	SAND, PAINT, AND REINSTALL SALVAGED WALL BASE, PAINT GYP SOFFITS PNT-3.
110A	STORAGE	VCT-1	ETR / WD-1	PNT-1	PNT-2	ACT-1	SAND, PAINT, AND REINSTALL SALVAGED WALL BASE.
111	MEN'S T.R.	FT-1, TS-1	TS-2	BASE BID: WT-1,2, TS-3 ALT: WT-1, PNT-4, TS-3	PNT-2	ACT-1	
112	WOMEN'S T.R.	FT-1, TS-1	TS-2	BASE BID: WT-1,2, TS-3 ALT: WT-1, PNT-4, TS-3	PNT-2	ACT-1	

ROOM SIGNAGE SCHEDULE				
ROOM / SIGN NUMBER	ROOM NAME	SIGN NAME	TYPE #	REMARKS / COMMENTS
109	TOILET	ALL GENDER RESTROOM	1	WALL MOUNT ON LATCH SIDE OF DOOR
110A	STORAGE	STORAGE	4	WALL MOUNT ON LATCH SIDE OF DOOR
111	MEN'S T.R.	MEN'S RESTROOM	3	MOUNT ON DOOR
112	WOMEN'S T.R.	WOMEN'S RESTROOM	2	WALL MOUNT ON LATCH SIDE OF DOOR

INTERIOR FINISH SCHEDULES
RIVERSIDE VILLAGE CENTER RESTROOM RENOVATIONS
VILLAGE OF RIVERSIDE
35 STANTON STREET, PAINTED POST NY 14870

VC-A9.1

PROJECT NO: 1004-054

HUNT ENGINEERS | ARCHITECTS | SURVEYORS
ALBANY, NY • BINGHAMTON, NY • HORSENEADS, NY • ROCHESTER, NY
ONE HUNTERS LANE, SUITE 200, ALBANY, NY 12206
WWW.HUNT-EAS.COM 607-358-1000
NY CERTIFICATE NO. 0016320 PA CERTIFICATE NO. TSC220313464-1

DRAWN BY: EKM
CHECKED BY: SZ
DATE: 08/11/2026
PHASE: CP

REVISION:
1 08/14/2026
DATE: 08/14/2026
1
ISSUE FOR BID
"IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER'S ARCHITECT'S OR SURVEYOR'S SEAL."

Copyright 2026

GENERAL NOTES - MECHANICAL

- A ALL EQUIPMENT INTENDED TO BE TURNED OVER TO THE OWNER, SHALL BE BALANCED, FULLY CONTROLLED & FUNCTIONALLY TESTED REGARDLESS OF SUBSTANTIAL COMPLETION DATE.
- B THIS DRAWING IS INTENDED TO SHOW THE GENERAL SCOPE OF ITEMS TO BE REMOVED. IT IS NOT INTENDED TO BE ALL INCLUSIVE. THE CONTRACTOR SHALL FIELD VERIFY ALL ITEMS TO BE REMOVED. ANY ITEM IN QUESTION SHOULD BE VERIFIED WITH THE ENGINEER PRIOR TO REMOVAL.
- C ALL ITEMS SCHEDULED FOR DEMOLITION ARE THE PROPERTY OF THE OWNER. THE CONTRACTOR SHALL PLACE WANTED EQUIPMENT IN AREA DESIGNATED, ON SITE BY THE OWNER. ANY ITEM THE OWNER WISHES NOT TO KEEP SHALL BE DISPOSED OF BY THE CONTRACTOR.
- D THE CONTRACTOR WILL BE RESPONSIBLE FOR ALL CUTTING AND PATCHING UNLESS CLEARLY INDICATED TO BE PART OF ANOTHER PRIME CONTRACT. CONTRACTOR TO PATCH TO MATCH ALL EXISTING FINISHES RESULTING FROM DEMOLITION WORK UNLESS INDICATED TO BE PART OF ANOTHER PRIME CONTRACT.
- E THE CONTRACTOR SHALL REMOVE, PROTECT, REPLACE AND/OR REINSTALL ANY CEILING OR GRID DAMAGED OR REMOVED AS A RESULT OF EXECUTION OF CONTRACT SCOPE. UNLESS INDICATED TO BE PART OF ANOTHER PRIME CONTRACT.
- F COORDINATE ALL NEW ROOF, WALL, AND FLOOR PENETRATIONS WITH OTHER TRADES.
- G PRIOR TO CONSTRUCTION AND INSTALLATION OF NEW WORK, THE CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS (FRAMING, ELECTRICAL, PLUMBING, HVAC, ETC.). NOTIFY ARCHITECT/ENGINEER OF ANY CONFLICTS THAT REQUIRE MODIFICATION TO NEW HVAC SYSTEM INSTALLATION.

DEMOLITION NOTES - MECHANICAL

- D1 REMOVE EXHAUST FAN, DUCTWORK & ROOF HOOD IN THEIR ENTIRETY.
- D2 REMOVE RADATION IN ITS ENIRETY. RECONNECT & RECONNECT INLET/OUTLET OF PIPING FROM RADATION ABOVE CEILING.

CONSTRUCTION NOTES MECHANICAL

- 1 EXHAUST FAN SIMILAR TO LOREN COOK GC-120. BALANCE FAN @100 CFM FAN SHALL BE 120V, TIE INTO LIGHT SWITCH.
- 2 SURFACE MOUNT ELECTRIC HEATER SIMILAR TO TRANE MODEL UHAA, 1.5KW, 120V1Ø. PROVIDE REMOTE MOUNTED LINE-VOLTAGE T-STAT WITH GAURO

GENERAL NOTES - PLUMBING


- A ALL WORK ON THIS DRAWING IS THE RESPONSIBILITY OF THE PLUMBING CONTRACTOR UNLESS CLEARLY INDICATED TO BE PART OF ANOTHER CONTRACT.
- B THESE DRAWINGS ARE INTENDED TO SHOW THE GENERAL SCOPE OF ITEMS TO BE REMOVED. IT IS NOT INTENDED TO BE ALL INCLUSIVE. THE CONTRACTOR SHALL FIELD VERIFY ALL ITEMS TO BE REMOVED. ANY ITEM IN QUESTION SHOULD BE VERIFIED WITH ENGINEER PRIOR TO REMOVAL.
- C ALL ITEMS SCHEDULED FOR DEMOLITION ARE THE PROPERTY OF THE OWNER. THE CONTRACTOR SHALL PLACE WANTED EQUIPMENT IN AREA DESIGNATED ON SITE BY OWNER. ANY ITEM THE OWNER WISHES NOT TO KEEP SHALL BE PROPERLY DISPOSED OF BY THE CONTRACTOR.
- D THE CONTRACTOR SHALL REMOVE, PROTECT, REPLACE AND/OR REINSTALL ANY CEILING OR GRID DAMAGED OR REMOVED AS A RESULT OF EXECUTION OF CONTRACT SCOPE. UNLESS OTHERWISE INDICATED TO BE PART OF ANOTHER PRIME CONTRACT, THE PLUMBING CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS (FRAMING, ELECTRICAL, PLUMBING, HVAC, ETC) PRIOR TO CONSTRUCTION AND INSTALLATION OF NEW WORK. NOTIFY ARCHITECT/ENGINEER OF ANY CONFLICTS THAT REQUIRE MODIFICATION TO NEW PLUMBING SYSTEM INSTALLATION.
- F THE CONTRACTOR IS TO REINSULATE ALL PORTIONS OF EXISTING PLUMBING SYSTEM DISTURBED DURING EXECUTION OF CONTRACT SCOPE.
- G THE PLUMBING CONTRACTOR WILL BE RESPONSIBLE FOR ALL NEW FLOOR OPENINGS, EXCAVATIONS OF EXISTING SUBSTRATES AND WALL PENETRATIONS TO INSTALL NEW PIPING. UNLESS OTHERWISE NOTED, ALL PIPE PENETRATIONS THROUGH WALLS AND FLOORS WILL BE SEALED WITH FIRE-STOPPING.
- H UNLESS NOTED OTHERWISE THE PLUMBING CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF ALL PIPING WITHIN 5 FEET FROM BUILDING. COORDINATE CONNECTIONS.
- I THE PLUMBING CONTRACTOR WILL BE RESPONSIBLE FOR PATCHING AND SEALING OF ALL DISTURBED SUBSTRATE, WALLS AND CEILING TO EXISTING FINISHES UNLESS OTHERWISE NOTED.
- J THE PLUMBING CONTRACTOR TO COORDINATE ALL NEW ROOF, WALL & FLOOR PENETRATIONS.
- K INVERT DIMENSION IS TO BOTTOM OF PIPE.
- L ALL PIPING TO BE ROUTED AS HIGH AND AS TIGHT TO STEEL STRUCTURE AS POSSIBLE.
- M THE CONTRACTOR WILL BE RESPONSIBLE FOR FINAL CONNECTION OF PLUMBING UTILITIES TO ALL EQUIPMENT REQUIRING SAID UTILITIES, INCLUDING THOSE PROVIDED BY OTHERS. COORDINATE AS REQUIRED.
- N THE CONTRACTOR IS TO PROVIDE ADA COMPLIANT VINYL PIPE COVER ON EXPOSED COLD WATER, HOT WATER AND SANITARY PIPING BELOW ADA LAVATORY/SINK. SANITARY PIPE COVER SHALL BE INSTALLED UP TO BOTTOM OF FIXTURE.
- O REFER TO ARCH DRAWINGS FOR INDICATION OF ADA FIXTURES & ACCESSORIES, & ASSOCIATED MOUNTING HEIGHTS.

DEMOLITION NOTES - PLUMBING


- D1 REMOVE SANITARY BACK TO POINTS INDICATED.
- D2 REMOVE PLUMBING FIXTURE IN ITS ENTIRETY. REMOVE HW/CW BACK TO MAINS. REMOVE SANITARY BACK TO POIN INDICATED.

CONSTRUCTION NOTES - PLUMBING


- 1 CONNECT 3/4" HW/CW TO MAINS IN BOILER ROOM.
- 2 RECONNECT & EXTEND CW TO WATER CLOSET.
- 3 RECONNECT & EXTEND CW/HW TO LAV.

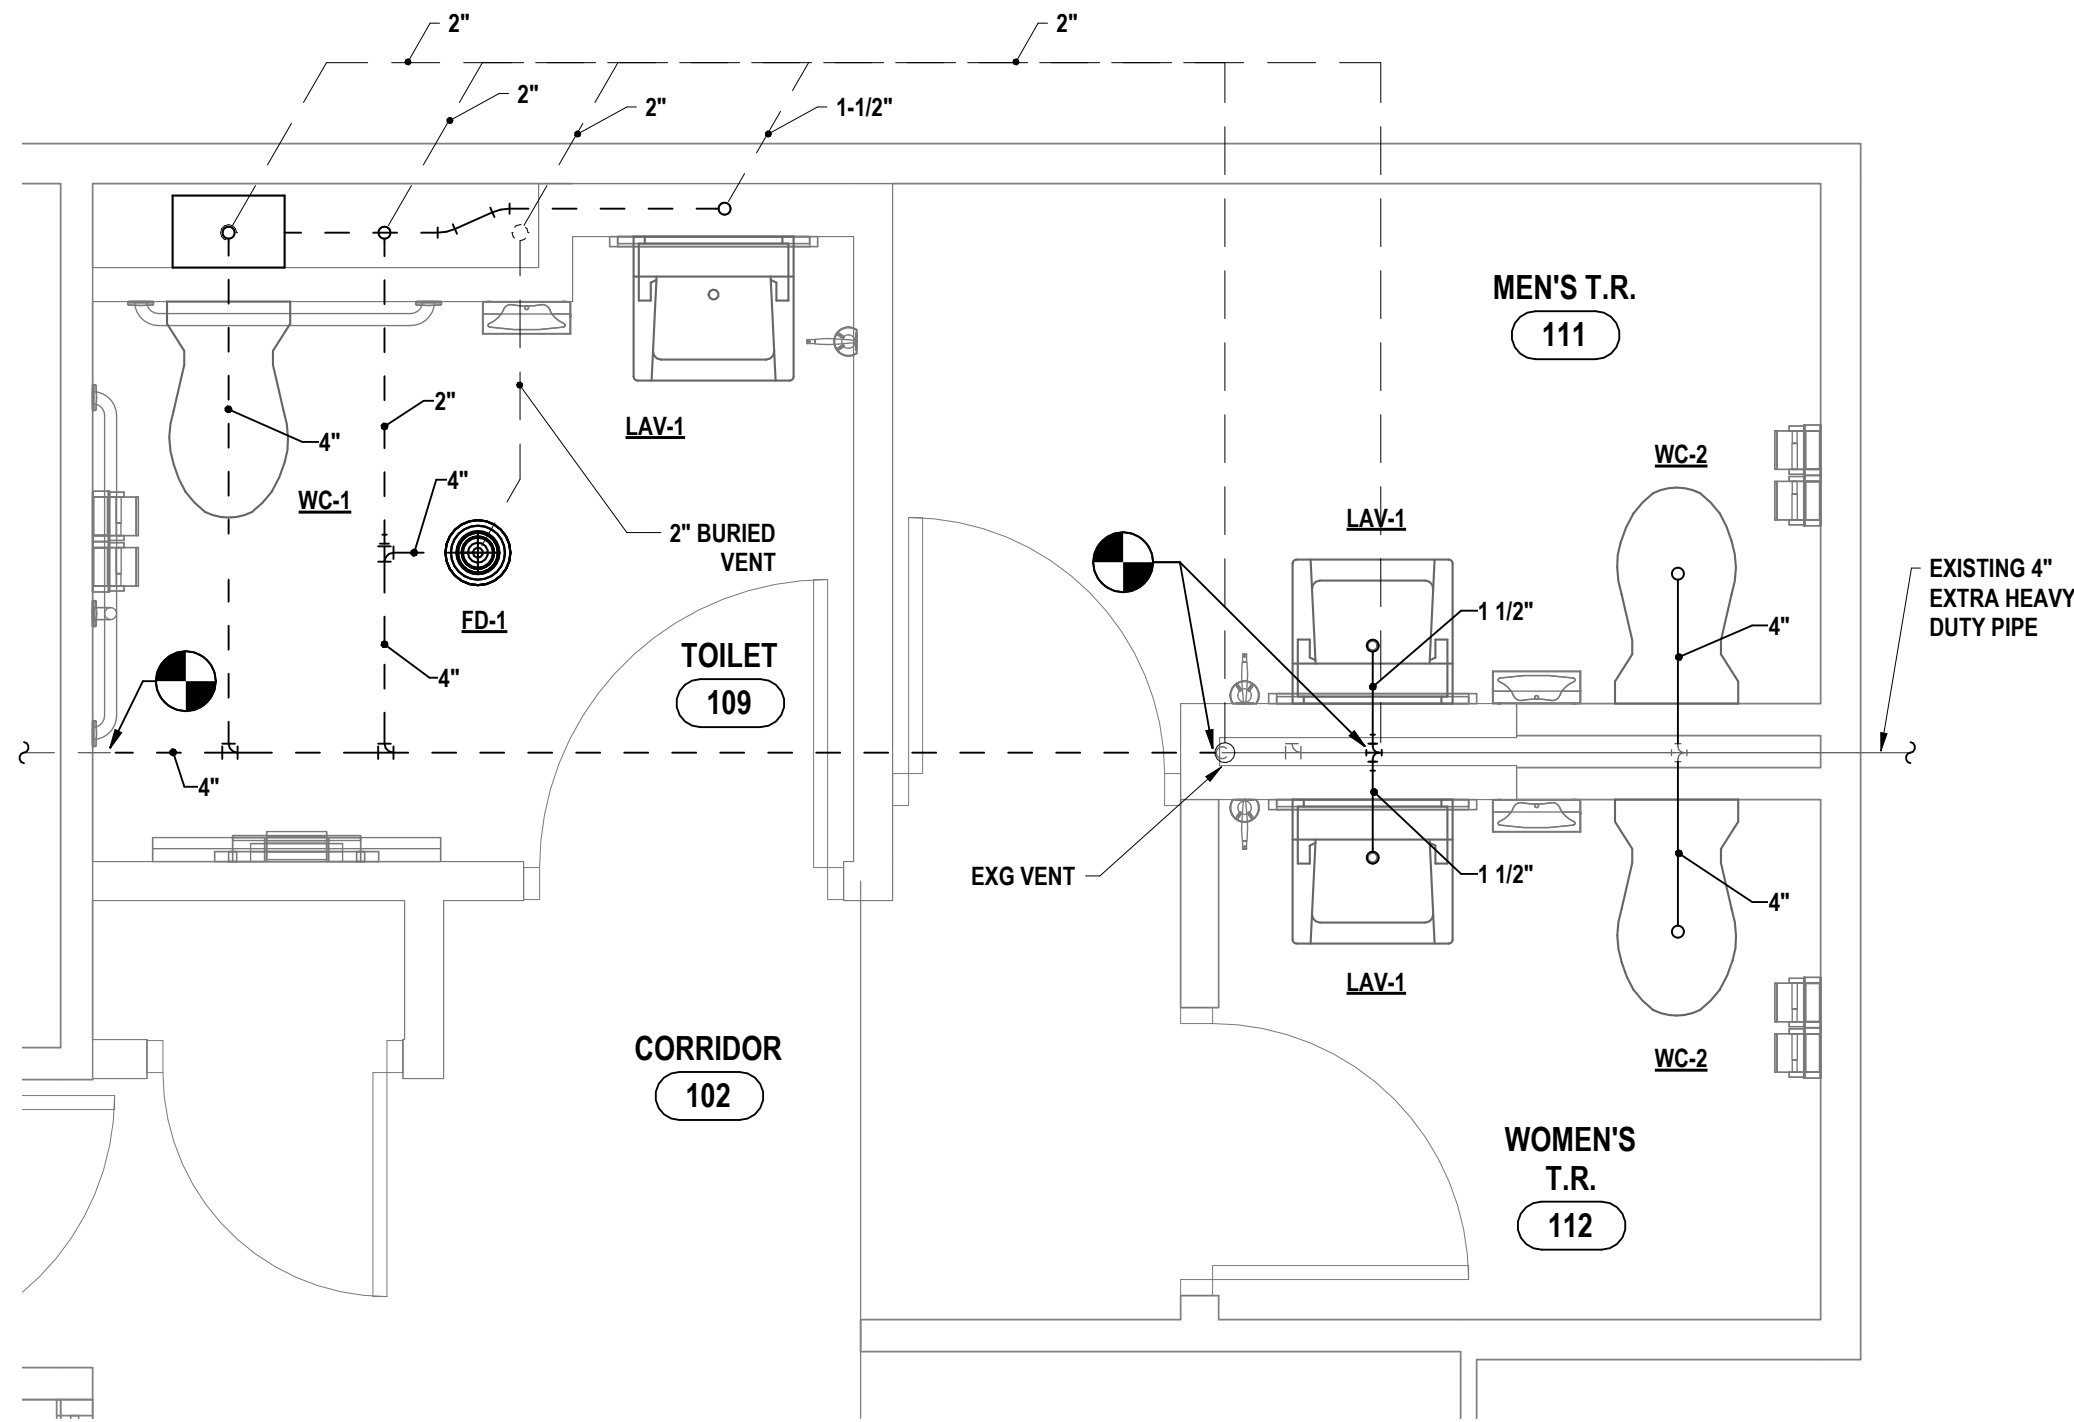


5 FIRST FLOOR SANITARY PLAN - PLUMBING
1/2" = 1'-0"

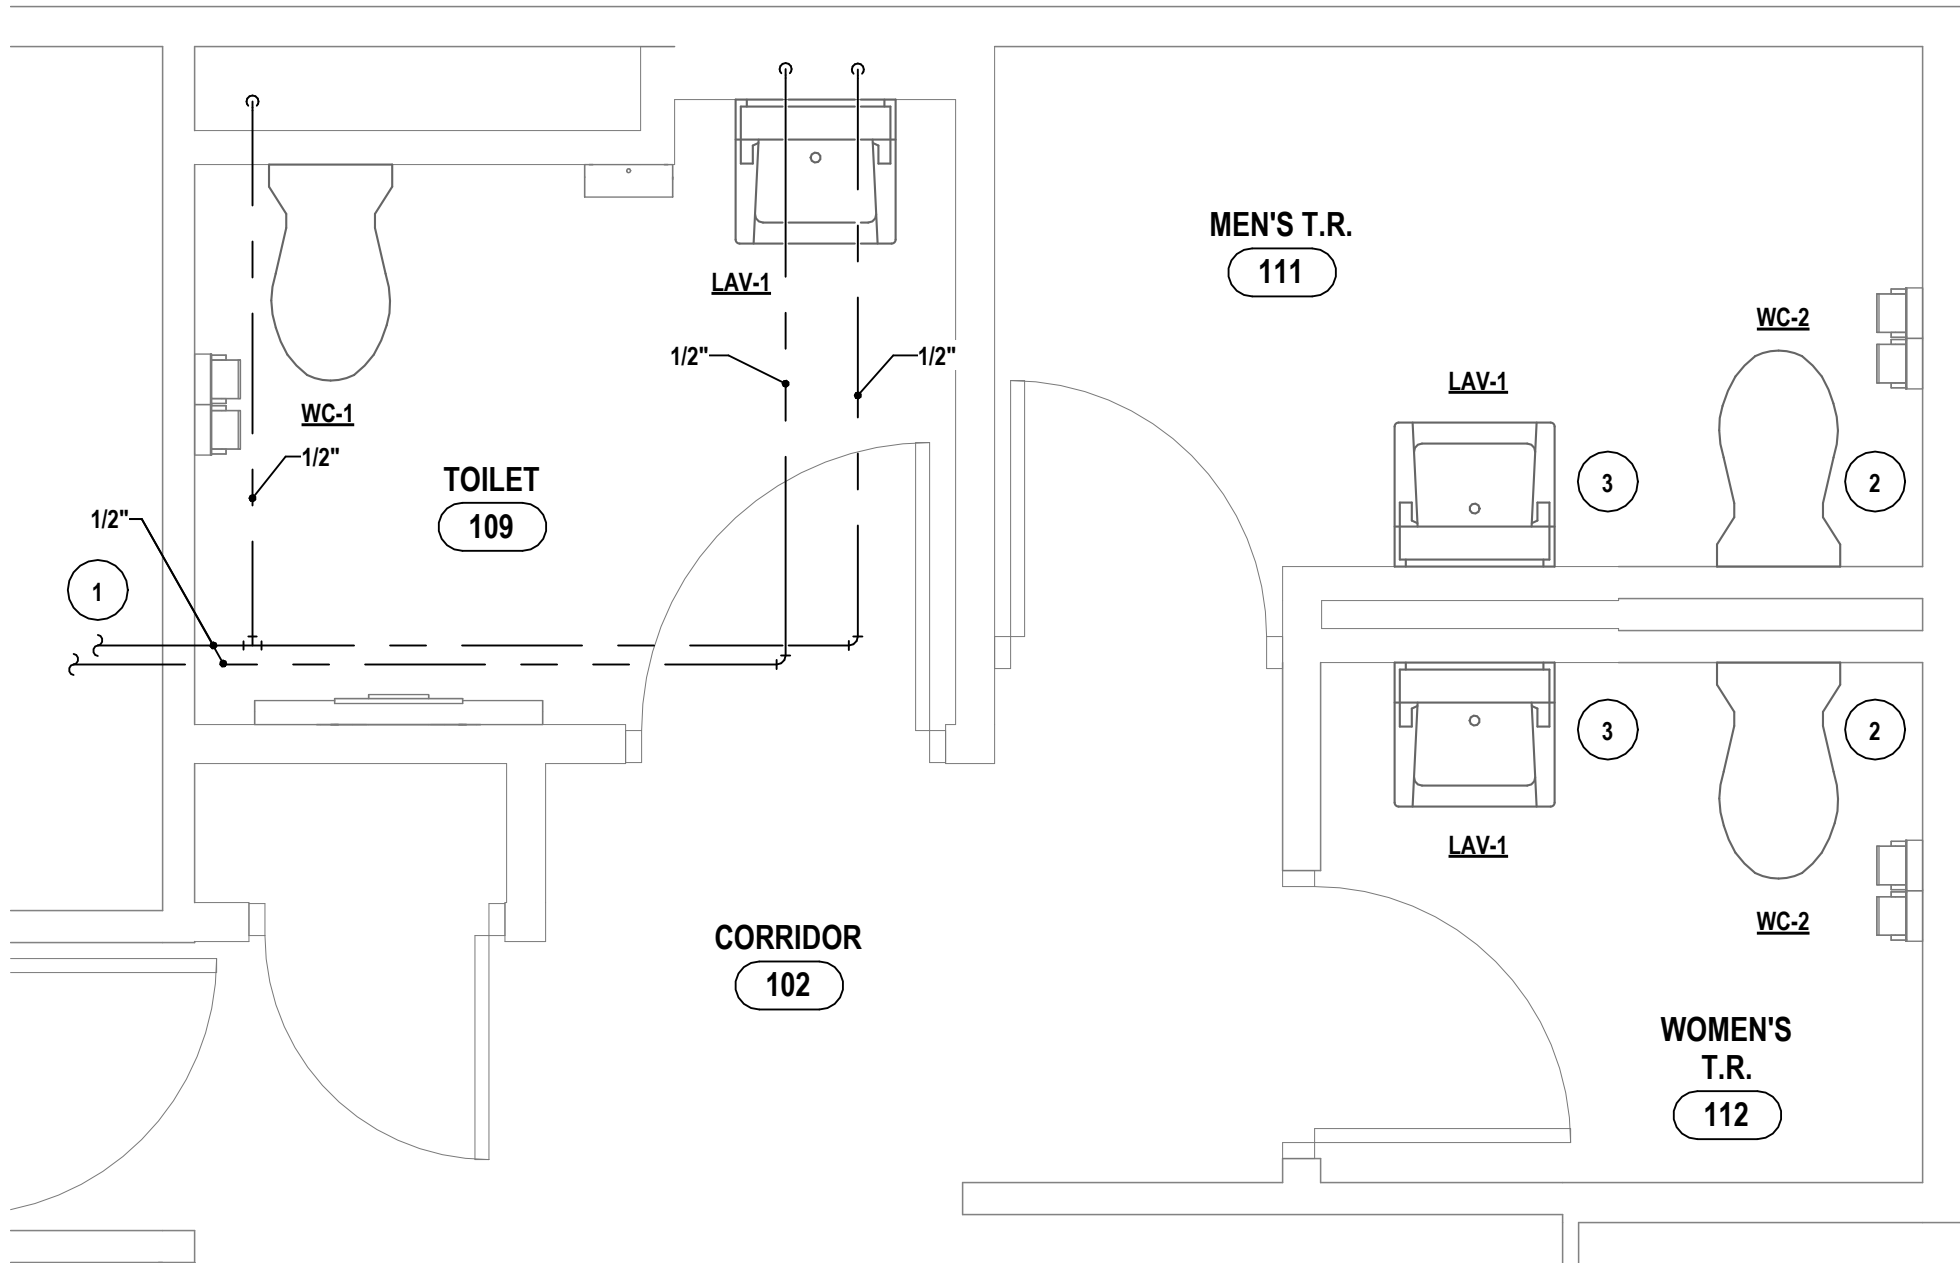


4 FIRST FLOOR DOMESTIC PLAN - PLUMBING
1/2" = 1'-0"

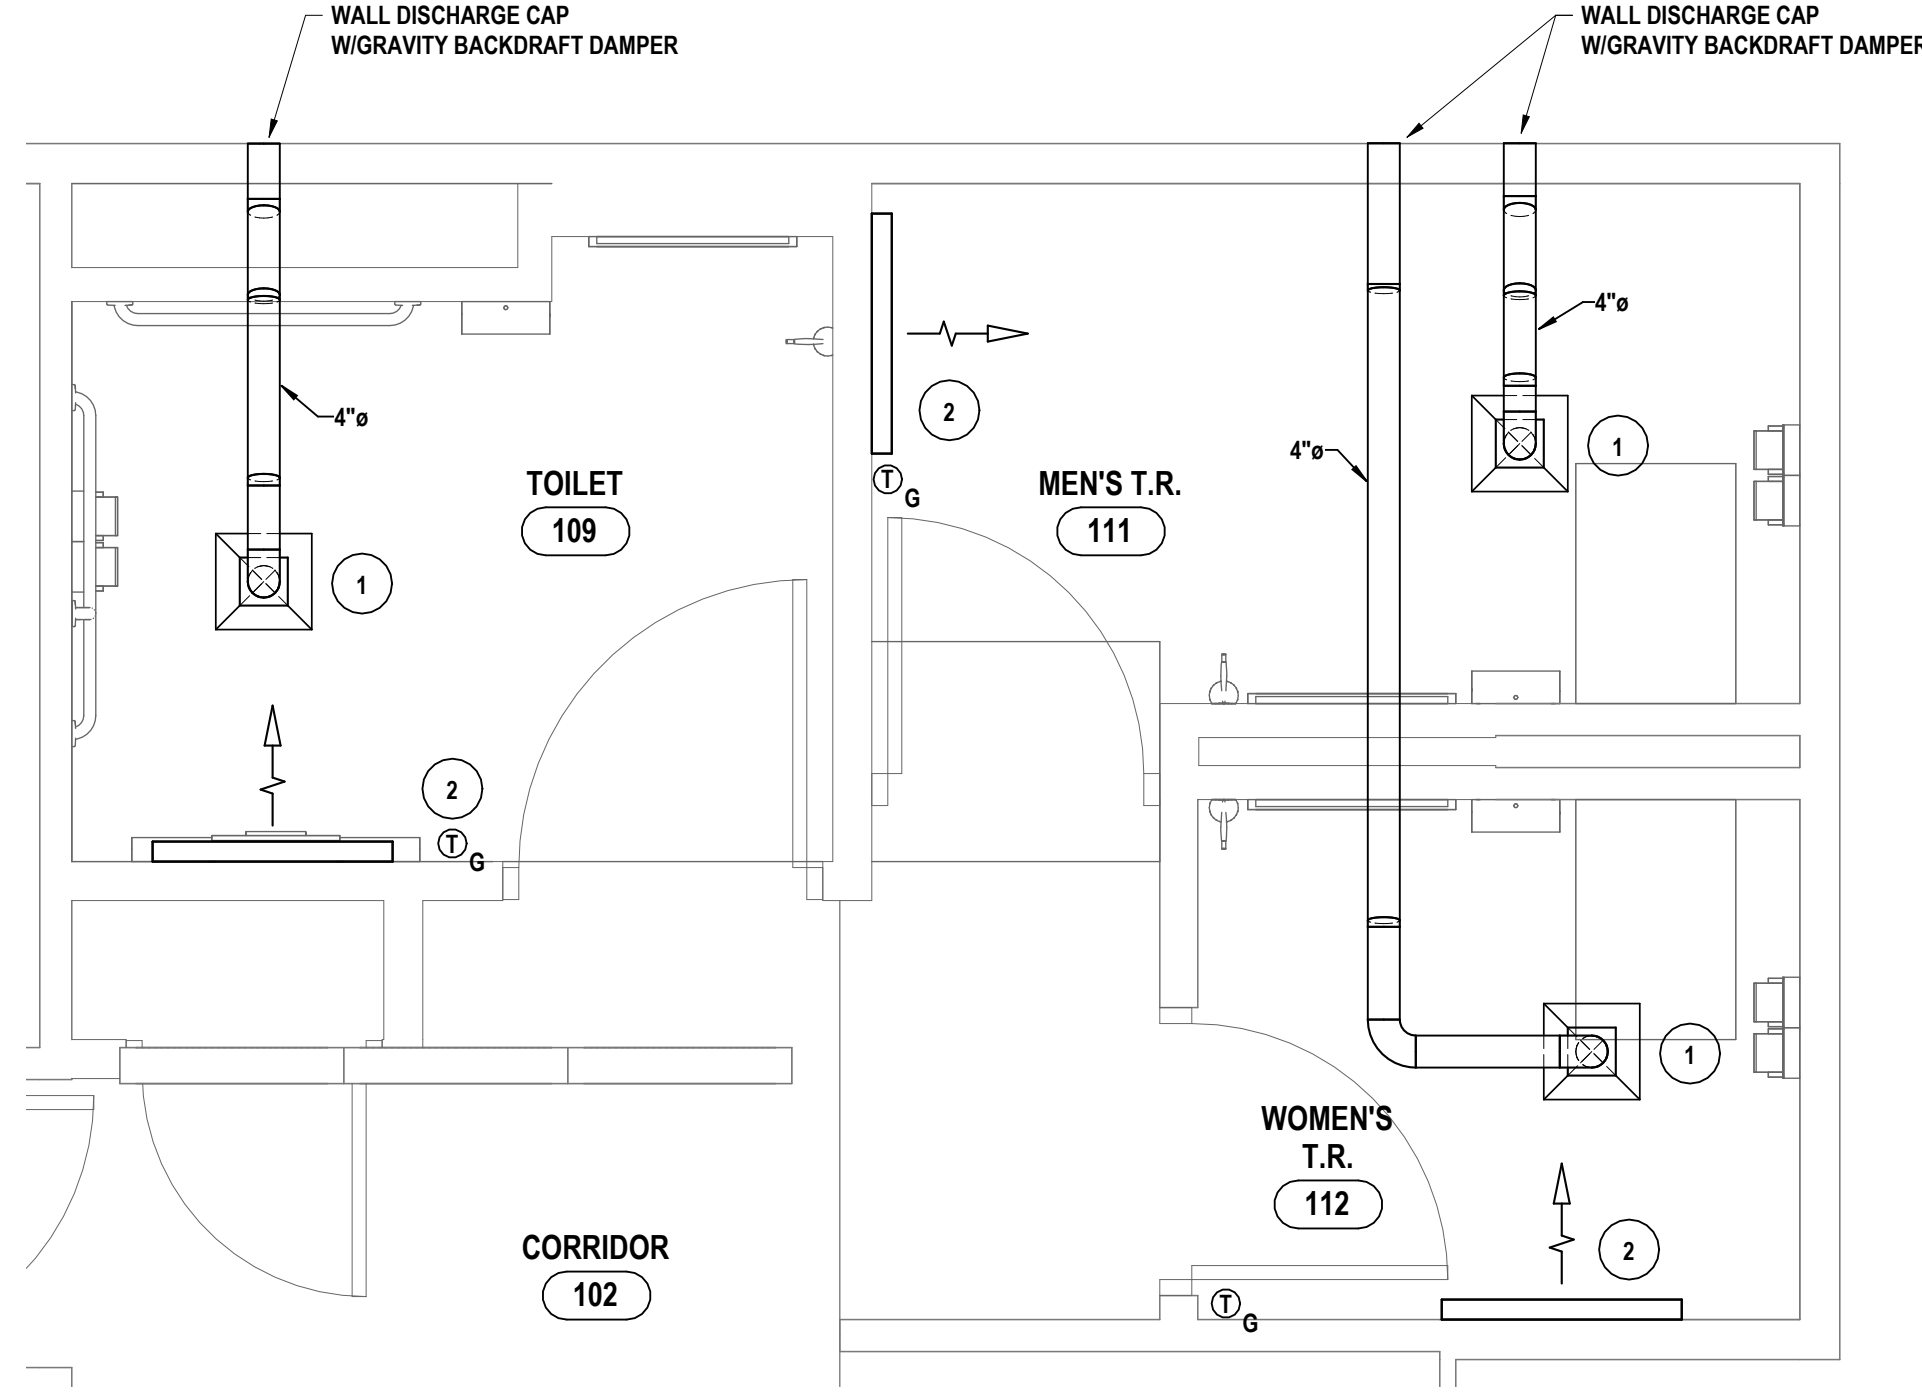


3 FIRST FLOOR HVAC PLAN - MECHANICAL
1/2" = 1'-0"

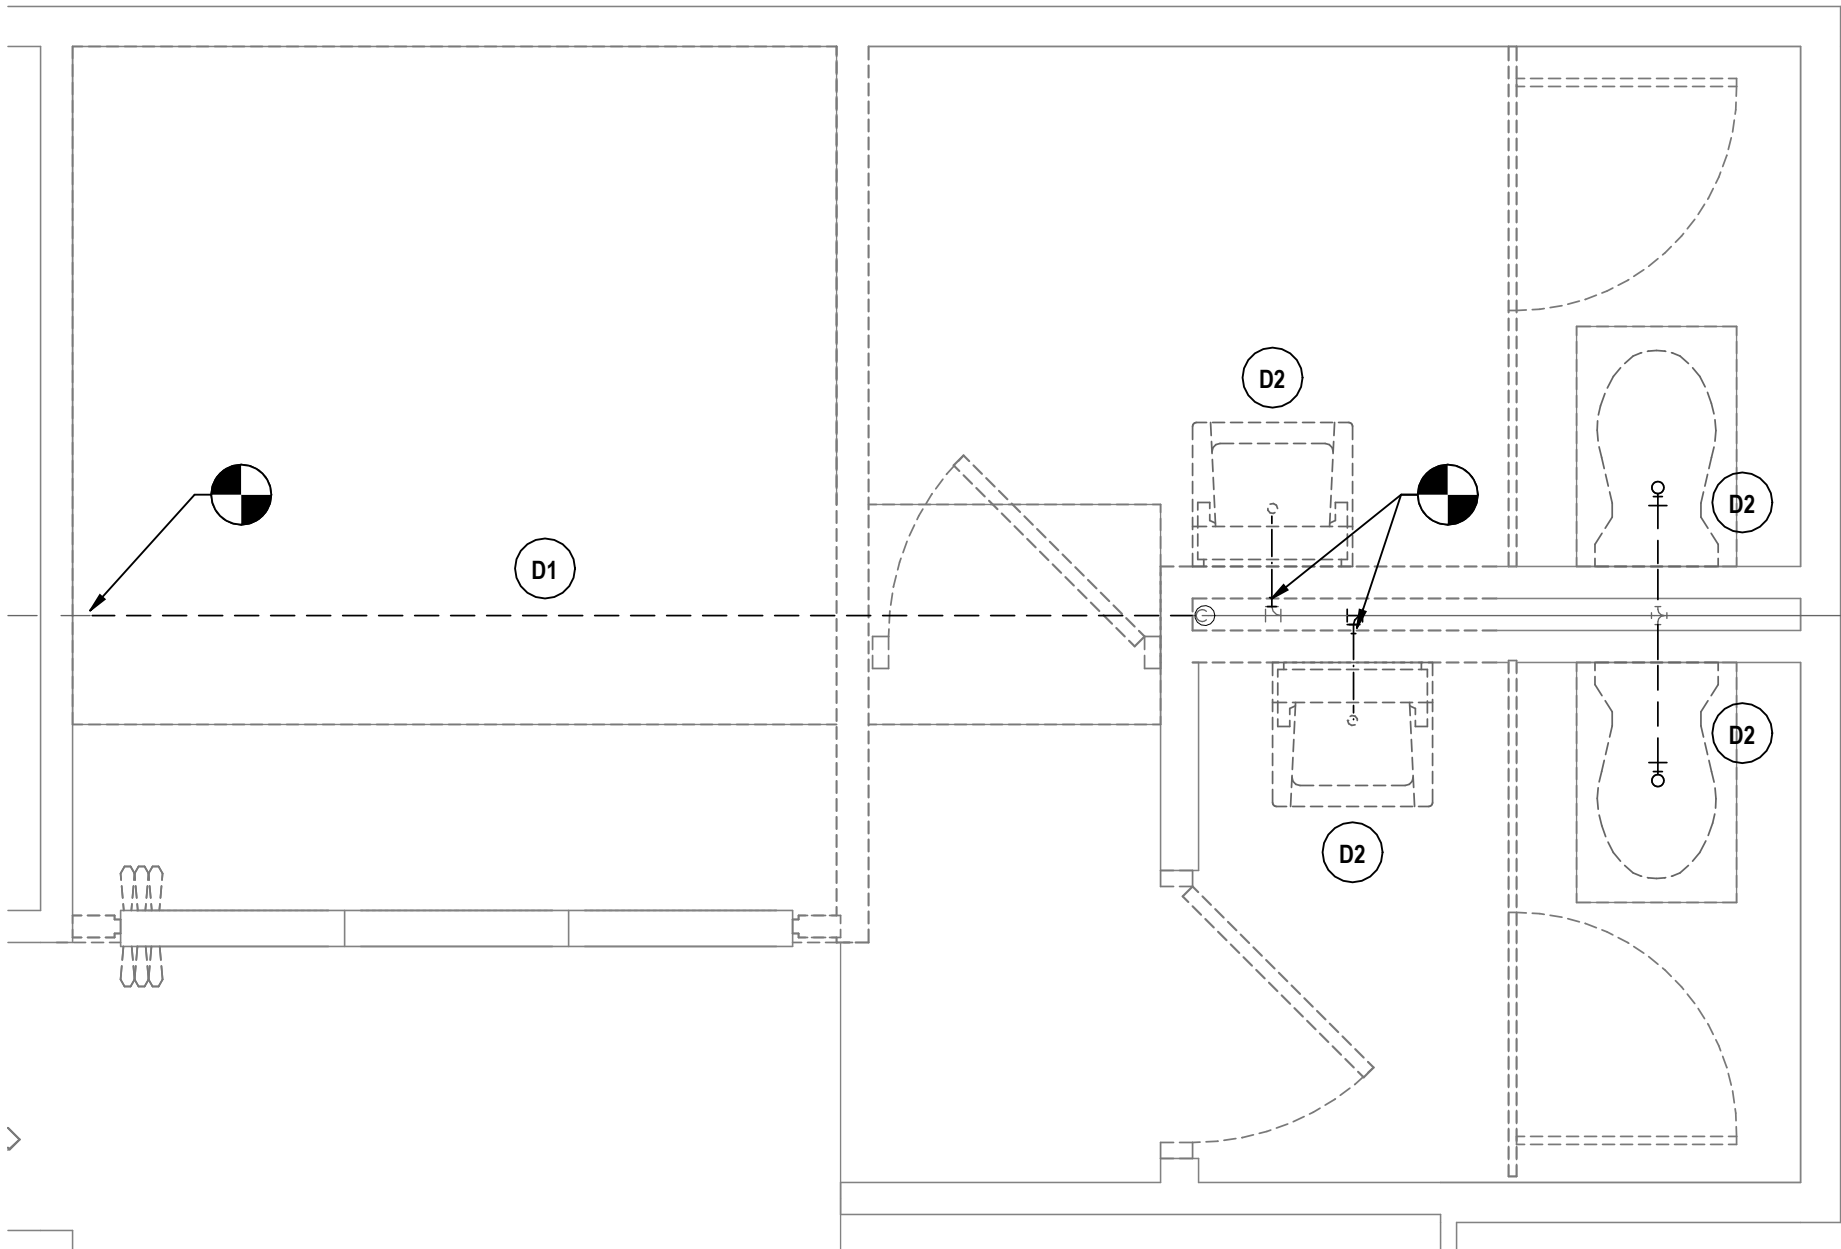

2 FIRST FLOOR PLUMBING DEMOLITION PLAN - PLUMBING
1/2" = 1'-0"

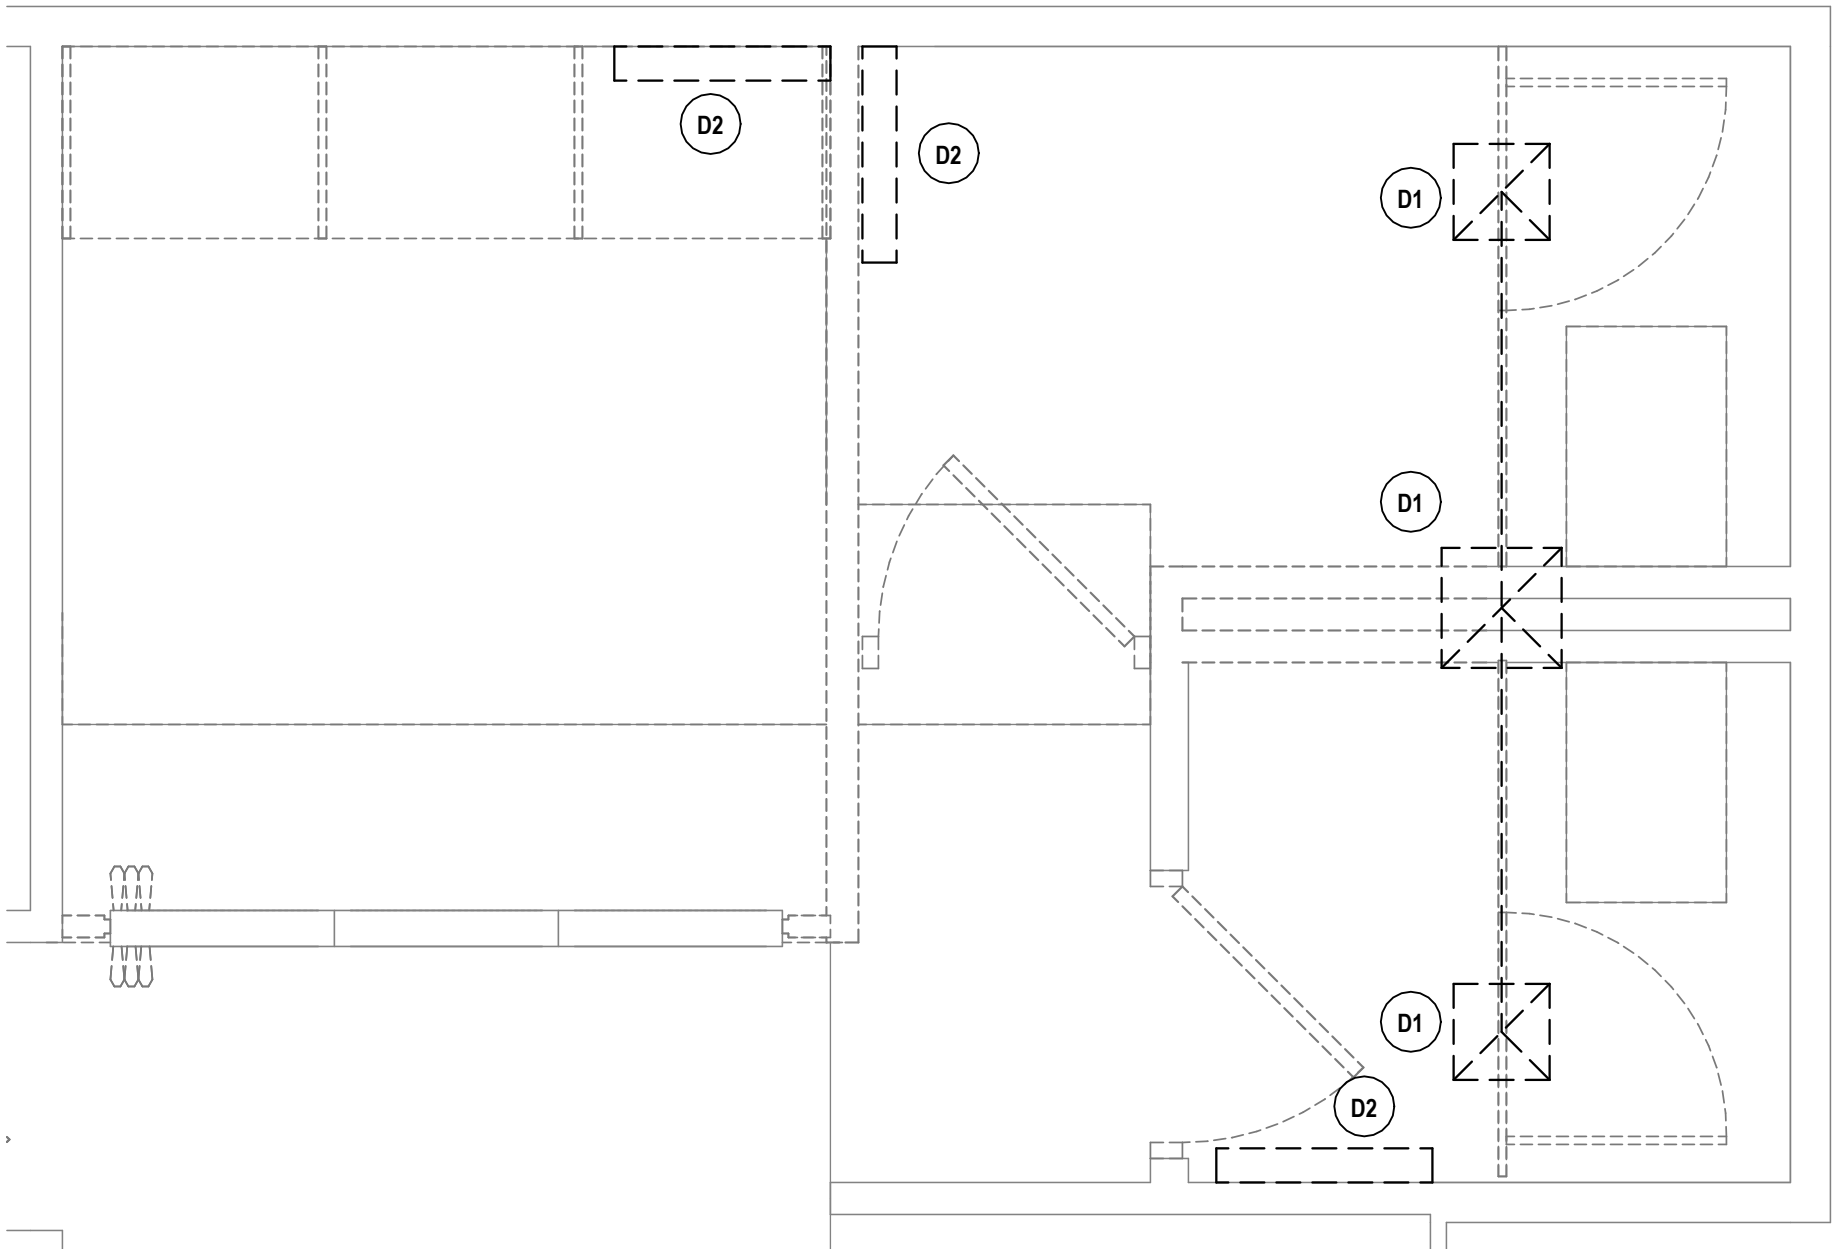

1 FIRST FLOOR HVAC DEMOLITION PLAN - MECHANICAL
1/2" = 1'-0"



LIGHT FIXTURE SCHEDULE										
TYPE	LOCATION	FIXTURE DESCRIPTION	MANUFACTURER/CATALOG NO.	ALTERNATE MANUFACTURER	LAMP INFO	NOMINAL LUMENS	CONTROL TYPE	VOLTAGE	FIXTURE WATTAGE	NOTES
A	ROOMS 109 & 111	6" DIAMETER NEW CONSTRUCTION RECESSED DOWNLIGHT. FIXTURE PROFILE TO BE NORMALLY 6.00" X 6.375" H WITH 7.375" MAJOR OD FOR THE TRIM FLANGE.	LIGHTOLIER - FRAME# 6RN - ENGINE# CBL1093SWZ10U - TRIM# CBRDLCDD	USAI PRUDENTIAL LITELINE	LED 3500K 90+ CRI	1000	0-10V	UNIV.	7.1	2,3
B	ROOM 112	6" DIAMETER NEW CONSTRUCTION RECESSED DOWNLIGHT. FIXTURE PROFILE TO BE NORMALLY 6.00" X 6.375" H WITH 7.375" MAJOR OD FOR THE TRIM FLANGE.	LIGHTOLIER - FRAME# 6RN - ENGINE# CBL1093SWZ10U - TRIM# CBRDLCDD	USAI PRUDENTIAL LITELINE	LED 3500K 90+ CRI	1500	0-10V	UNIV.	10.9	2,3
EM	ROOMS 109, 111, & 112	ROUNDED HOUSING SURFACE MOUNTED EMERGENCY WALL PACK FIXTURE. FIXTURE PROFILE TO BE NORMALLY 7.125" W X 4.70" H X 2.50" D. FIXTURE TO INCLUDE INTEGRAL BATTERY BACKUP COMPLIANT WITH NFPA 70/101, UL1678, 924, AND BE DAMP LOCATION RATED.	CHLORIDE# CLU-N-W	EMERGLITE SHAT-R-SHIELD NICOR	(2) LIGHT ENGINES	-	UL924	UNIV.	2	6

LIGHT FIXTURE SCHEDULE NOTES:

1. FIXTURE TO BE SUITABLE FOR MOUNTING WITHIN ACT CEILING CONDITION
2. FIXTURE TO BE SUITABLE FOR MOUNTING WITHIN GIB CEILING CONDITION
3. CONTRACTOR TO COORDINATE FIXTURE MOUNTING WITH APPROVED CEILING SHOP DRAWINGS, FIELD CONDITIONS, AND MANUFACTURER'S RECOMMENDATIONS
4. FIXTURE TO HAVE REMOTE DRIVER/POWER SUPPLY. CONTRACTOR TO COORDINATE REMOTE DRIVER LOCATIONS WITH ARCHITECTURAL DRAWINGS, FIELD CONDITIONS, AND MANUFACTURER'S RECOMMENDATIONS
5. CONTRACTOR TO COORDINATE FIXTURE RUN LENGTH WITH ELECTRICAL LIGHTING DRAWINGS AND FIELD CONDITIONS
6. FIXTURES LABELED "EM" SHALL RECIEVE A 90 MINUTE BACKUP BATTERY WITH APPROPRIATE UL924 RATED TRANSFER DEVICE.

DEMOLITION NOTES - ELECTRICAL

- D1 DISCONNECT AND REMOVE EXISTING ELECTRICAL DEVICES AND FIXTURES IN THIS SPACE. REMOVE ALL ASSOCIATED WIRE, CONDUIT, AND BOXES COMPLETE BACK TO SOURCE UNLESS OTHERWISE INDICATED.
- D2 DISCONNECT AND REMOVE WALL MOUNTED DEVICES IN LOCATIONS SHOWN ON PLAN. REMOVE TELEPHONE/DATA DEVICES INCATED INCLUDING ALL CABLING AND HARDWARE COMPLETE BACK TO SOURCE. DISCONNECT AND REMOVE RECEPTACES AND ASSOCIATED CIRCUITRY AND BACK BOXES COMPLETE. THE ROUGH-IN FOR THE RECEPTACLE LOCATION BEHIND THE DESK SHALL BE PREPARED FOR REPLACEMENT WITH A QUAD RECEPTACLE IN THIS LOCATION CONNECTED TO EXISTING CIRCUITRY. SECURE EXISTING CIRCUITRY IN SAID LOCATION FOR REUSE. THERMOSTAT SHALL BE RELOCATED AND ASSOCIATED CABLING EXTENDED TO NEW LOCATION.
- D3 DISCONNECT AND REMOVE EXISTING LIGHT FIXTURE IN THIS LOCATION. IDENTIFY AND SECURE EXISTING CIRCUITRY AND CONTROLS FOR REUSE.
- D4 DISCONNECT AND REMOVE EXISTING SWITCHES, BACK BOXES AND CIRCUITRY IN THIS LOCATION. CIRCUITRY TO BE REMOVED TO ABOVE CEILING AND TERMINATED IN A JUNCTION BOX, PREPARED FOR LETTER EXTENSION TO NEW SWITCH LOCATIONS.

CONSTRUCTION NOTES - POWER

- P1 PROVIDE 20A/1P BREAKER IN MAIN PANEL AND CIRCUIT TO RECEPTACLES PER SPECIFICATIONS. PROVIDE RECEPTACLES IN TYPES AND QUANTITIES SHOWN.
- P2 CIRCUIT EXHAUST FAN POWER WITH LIGHT SWITCH AND OCCUPANCY SENSOR CONTROLLING THE SPACE.
- P3 WIRE THROUGH LINE VOLTAGE THERMOSTAT TO CONTROL ELECTRIC HEATER SERVING THE SPACE.

CONSTRUCTION NOTES - LIGHTING

- L1 PROVIDE 20A/1P BREAKER IN PANEL PP2 AND CIRCUIT TO NEW LIGHTING FIXTURES AND CONTROLS SHOWN ON PLAN.
- L3 EXTEND EXISTING HALLWAY CIRCUITRY TO NEW FIXTURE LOCATION. CONTRACTOR TO ENSURE NEW FIXTURE IS OPERATING PROPERLY USING EXISTING CONTROLS.
- L4 PROVIDE NEW SINGLE POLE SWITCHES IN THIS LOCATION. EXTEND EXISTING CIRCUITRY REFERENCED IN NOTE "D4" TO NEW LOCATION. CONTRACTOR IS RESPONSIBLE TO VERIFY EXISTING SWITCH TYPES PRIOR TO STARTING SUBMITTAL/ORDERING CHECKING FOR 3W/4W SWITCHING AND ANY OTHER IMPORTANT FEATURES THE REPLACEMENT SWITCHES WILL NEED.

GENERAL NOTES - ELECTRICAL


- A CONTRACTOR IS RESPONSIBLE FOR ALL WORK ON THIS DRAWING UNLESS CLEARLY INDICATED TO BE PART OF ANOTHER PRIME CONTRACT.
- B CONTRACTOR SHALL VERIFY EXISTING CONDITIONS PRIOR TO CONSTRUCTION AND INSTALLATION AND NOTIFY ENGINEER/ARCHITECT OF CONFLICTS AND CONDITIONS WHICH INTERFERE WITH INSTALLATION AS SET FORTH IN CONTRACT DOCUMENTS.
- C CONTRACTOR IS RESPONSIBLE FOR ALL NEW WALL OPENINGS, EXCAVATIONS, AND PENETRATIONS, UNLESS SPECIFICALLY NOTED. UPON COMPLETION, ALL PENETRATIONS TO BE SEALED TO MAINTAIN FIRE RATING AS SPECIFIED ON ARCHITECTURAL DRAWINGS.
- D CONTRACTOR IS RESPONSIBLE FOR ALL CUTTING AND PATCHING UNLESS CLEARLY INDICATED AS PART OF ANOTHER PRIME CONTRACT.
- E MINIMUM CONDUIT SIZE USED ON THIS PROJECT SHALL BE #12 THINWALL UNLESS OTHERWISE NOTED.
- F MINIMUM WIRE SIZE USED ON THIS PROJECT SHALL BE #12 THINWALL UNLESS OTHERWISE NOTED.
- G ALL CABLING INSTALLATIONS AND TERMINATIONS TO ADHERE TO CURRENT NEC CODES AND RELATED ANS/IEEE STANDARDS.
- H DURING DEMOLITION OF EXISTING CABLING, ANY DAMAGE TO FUNCTIONING CABLING SYSTEM IS THE RESPONSIBILITY OF AND WILL BE REPAIRED BY THE CONTRACTOR.
- I CONTRACTOR SHALL BE AWARE OF THE PRESENCE OF EXISTING ASBESTOS CONTAINING MATERIAL SCHEDULED TO REMAIN IN PLACE WITHIN THE PROJECT SCOPE. ANY WORK REQUIRED THAT HAS THE POTENTIAL TO DISTURB HAZARDOUS MATERIALS SHALL BE COORDINATED DIRECTLY WITH THE OWNER.
- J ALL ELECTRICAL DEVICES, MATERIALS, AND PACKAGED EQUIPMENT SHALL BE LISTED AND LABELED BY UNDERWRITERS LABORATORIES INC. (UL).
- K NEW CIRCUIT BREAKER(S) THAT ARE TO BE ADDED TO EXISTING PANELBOARD(S) SHALL BE LISTED/LABELED FOR USE WITH THE EXISTING PANELBOARD(S).
- L THE SHORT-CIRCUIT RATINGS OF ALL PROTECTIVE DEVICES SHALL BE EQUAL TO OR EXCEED THE AVAILABLE SHORT-CIRCUIT CURRENT.
- M ALL WORK TO CONFORM TO CURRENT NEC AND ALL APPLICABLE CODES.
- N CONTRACTOR TO NOTIFY ELECTRICAL ENGINEER FOR INSPECTION OF ALL INSTALLATIONS BEFORE BEING BURIED OR COVERED.
- O ALL ELECTRICAL DEVICES AND EQUIPMENT SCHEDULED FOR REMOVAL ARE CONSIDERED PROPERTY OF THE OWNER. ELECTRICAL DEVICES AND EQUIPMENT SHALL BE PLACED IN AN AREA DESIGNATED BY THE OWNER. ANY DEVICE OR EQUIPMENT THE OWNER WISHES NOT TO KEEP SHALL BE DISPOSED OF BY THE CONTRACTOR.
- P CONTRACTOR IS RESPONSIBLE FOR DISCONNECTING POWER TO ANY EQUIPMENT SCHEDULED TO BE REMOVED OR REPLACED. COORDINATE WORK WITH OTHER PRIME CONTRACTORS AND DRAWINGS.
- Q CONTRACTOR IS RESPONSIBLE FOR PROVIDING POWER TO ANY EQUIPMENT SCHEDULED TO BE NEWLY INSTALLED. COORDINATE WORK WITH OTHER PRIME CONTRACTORS AND DRAWINGS.
- R CONTRACTOR IS RESPONSIBLE FOR COORDINATING ALL CONDUIT LOCATIONS IN FIREWALLS. A MAXIMUM OF ONE PIECE OF CONDUIT IS ALLOWED IN A NON-REINFORCED CORE. NO CONDUIT SHALL BE PLACED IN A VERTICALLY REINFORCED CORE IN A FIREWALL.

Branch Panel: PP1										
Location: UTILITY 108			Volts: 120/240 Single			A.I.C. Rating: 10,000				
Supply From: UTILITY TRANSFORMER			Phases: 1			Mains Type: MCB				
Mounting: SURFACE			Wires: 3			Mains Rating: 150 A				
Enclosure: NEMA 1						MCB Rating: 150 A				
CKT	Circuit Description	Trip	Poles	A	B	Poles	Trip	Circuit Description		CKT
1	**ATTIC LIGHT, ENTRY RECEPT.	20 A	1			1	20 A	OFFICES / VAULT / UTILITY ROOM LIGHT		2
3	CONFERENCE ROOM VENT FAN AND RECEPT.	20 A	1			1	20 A	PARKING LOT / KITCHEN / LADIES ROOM / ENTRY DOOR LIGHTS		4
5	DINING ROOM LIGHTS	20 A	1			1	20 A	HALLWAY / CLOSET / MENS ROOM LIGHTS		6
7	WATER FOUNTAIN RECEPT.	15 A	1			1	20 A	ABOVE OVEN RECEPT.		8
9	ENTRY / HALLWAY HEATERS	20 A	1			1	20 A	KITCHEN RECEPT.		10
11	FURNACE	15 A	1			1	15 A	CONFER. ROOM SPOT / CEILING LIGHTS		12
13	COPIER - EXIT LIGHTS	15 A	1			1	15 A	CONFER. ROOM CEILING LIGHTS		14
15	SIREN	20 A	1			1	20 A	MAINTAINANCE / CODE ENFORCEMENT OFFICE RECEPT.		16
17	GARAGE RECEPT. // 220	50 A	2			1	20 A	CEILING FANS / HALL EMERGENCY LIGHTS		18
19	--	--	--			2	100 A	100 AMP SUB - PP2		20
21	OVEN	50 A	2			--	--	--		22
23	--	--	--			1	15 A	*CLERK OFFICE RECEPT, CONFER. ROOM EMERGENCY LIGHTS		24
Notes: THIS PANEL BOARD AND ALL BREAKERS ARE EXISTING. * SPLIT BREAKER (2 X TRIP RATING SHOWN) ** GFCI BREAKER										


Branch Panel: PP2											
Location: UTILITY 108				Volts: 120/240 Single				A.I.C. Rating: 10,000			
Supply From: PP1				Phases: 1				Mains Type: MCB			
Mounting: SURFACE				Wires: 3				Mains Rating: 100 A			
Enclosure: NEMA 1								MCB Rating: 100 A			
CKT	Circuit Description			Trip	Poles	A	B	Poles	Trip	Circuit Description	CKT
1	*AIR CONDITIONER #1			20 A	2			2	30 A	*GARAGE	2
3	--			--	--			--	--	--	4
5	*PANEL OUTLETS			15 A	1			2	20 A	*AIR CONDITIONER #2	6
7	TOILET ROOM RECEPTS			20 A	1			--	--	--	8
9	T.R. LIGHTING AND EXHAUST FANS			20 A	1			1	20 A	ELECTRIC HEATER - T.R. 111	10
11	ELECTRIC HEATER - T.R. 109			20 A	1			1	20 A	ELECTRIC HEATER - T.R. 112	12
13											14
15											16
17											18
19											20
Notes: THIS PANEL BOARD AND INDICATED BREAKERS ARE EXISTING. ALL OTHER BREAKERS SHOWN ARE NEW. * EXISTING BREAKER											



1 PARTIAL FIRST FLOOR ELECTRICAL DEMOLITION PLAN
1/4" = 1'-0"

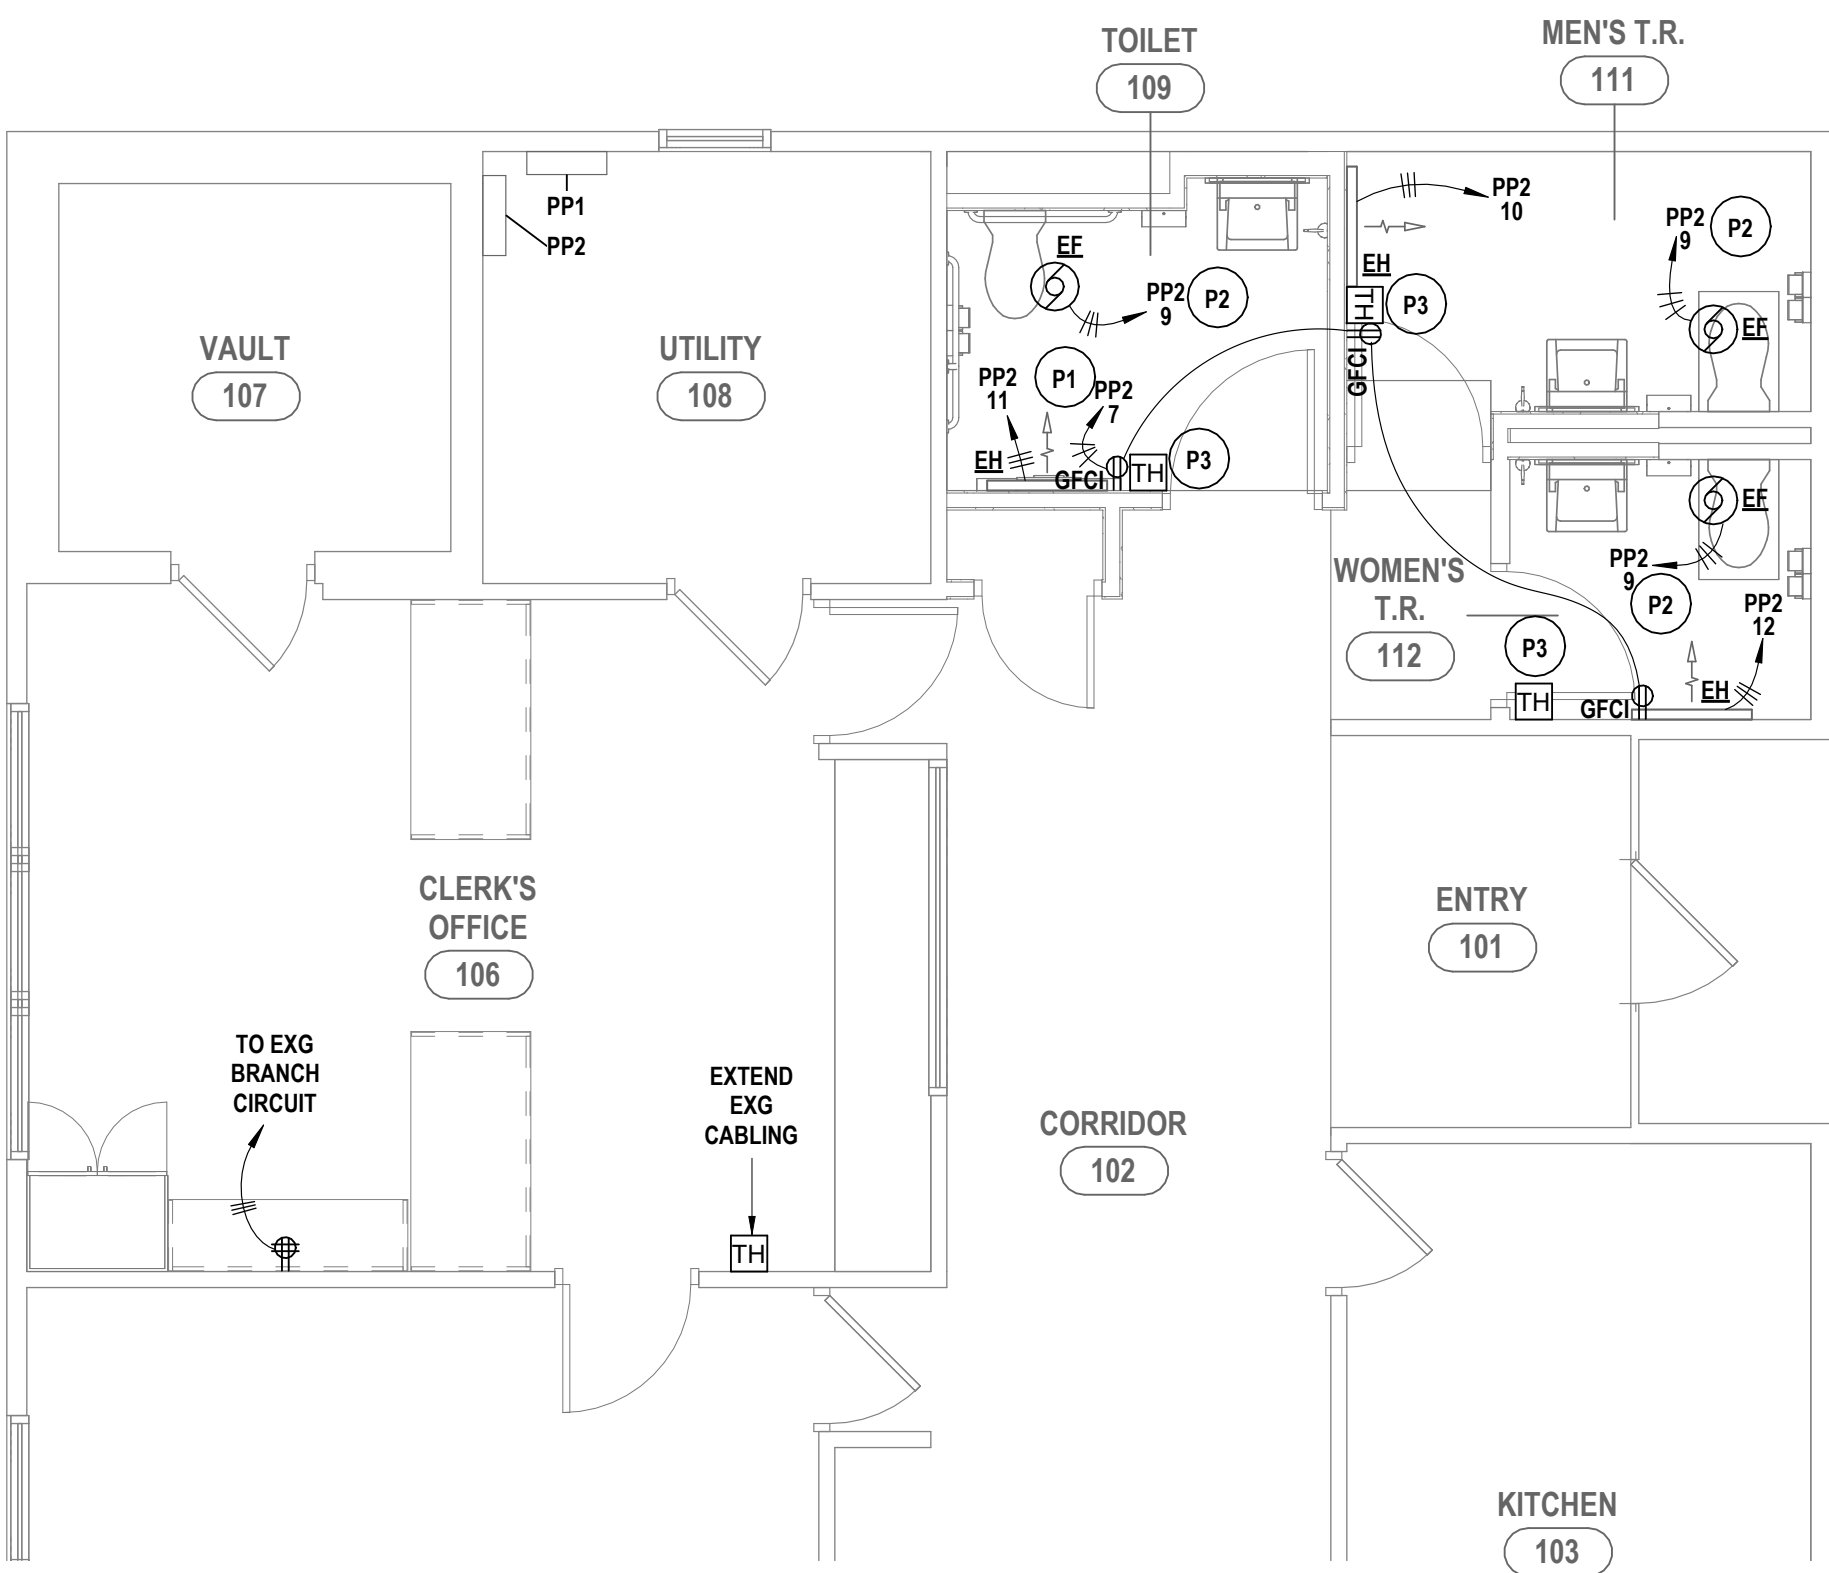

2 PARTIAL FIRST FLOOR POWER PLAN
1/4" = 1'-0"

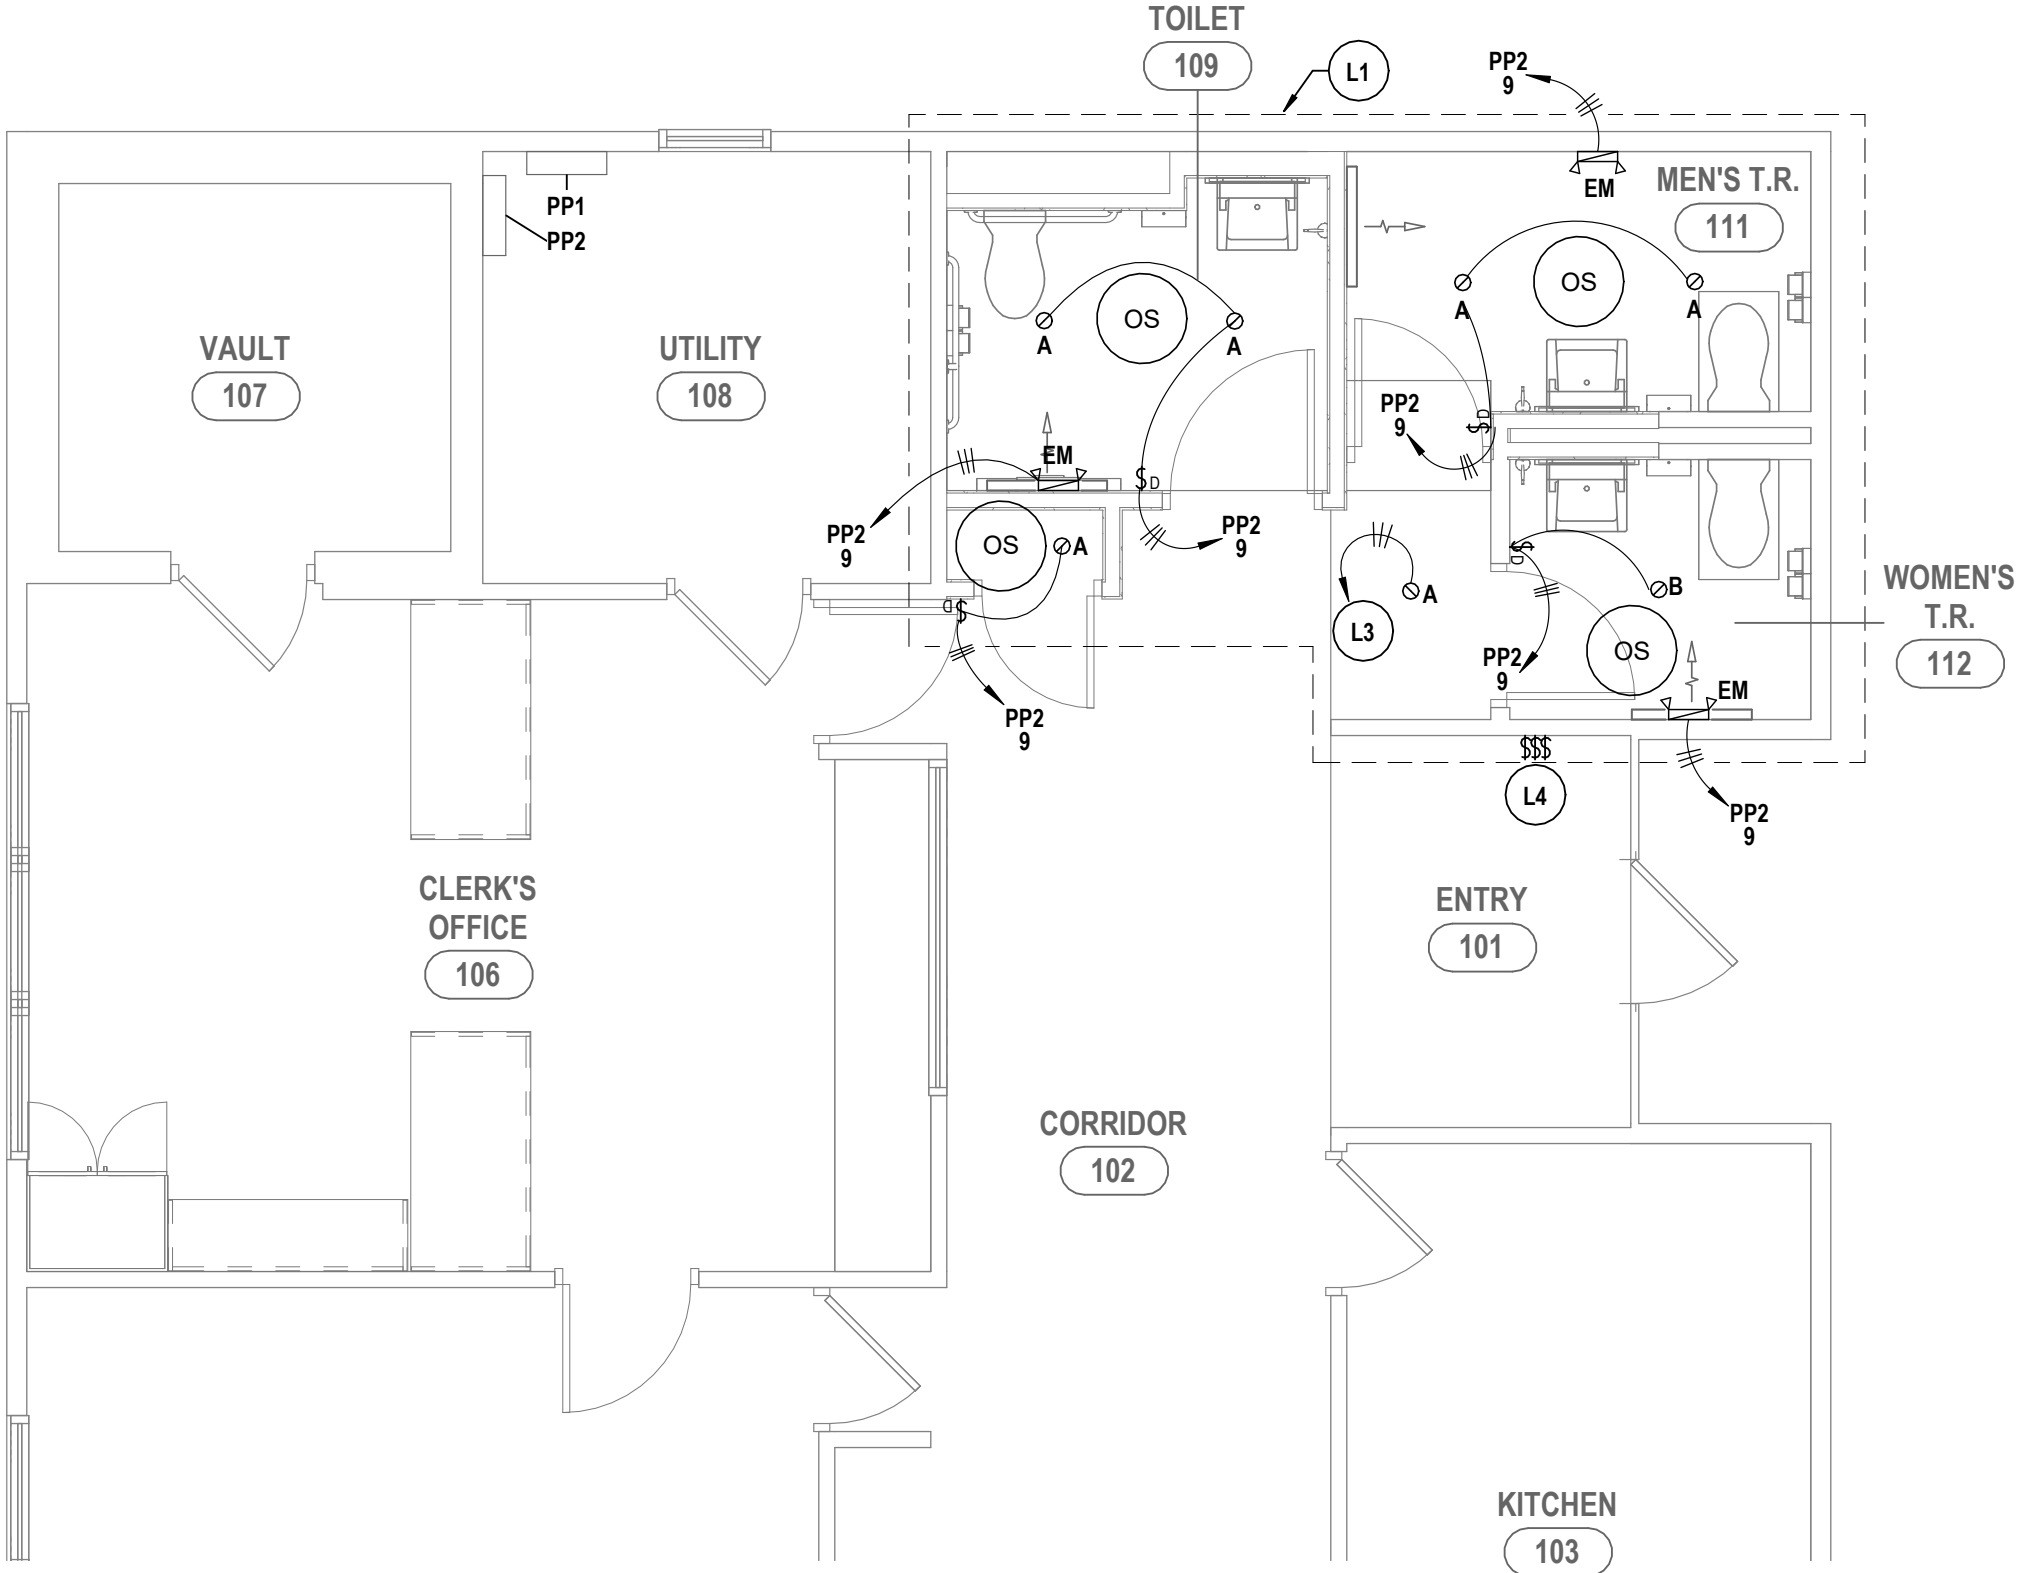

3 PARTIAL FIRST FLOOR LIGHTING PLAN
1/4" = 1'-0"

