

BID ADDENDUM NO. (2)

1/7/26

Hammondsport Central School District
2025 Capital Improvements Project
1925-014

(SED #57-25-01-04-0-002-025– Main Building)

(SED #57-29-01-04-5-003-008 – Bus Garage)

The following Addendum items shall be considered a part of the contract documents prepared by HUNT ENGINEERS, ARCHITECTS, LAND SURVEYORS & LANDSCAPE ARCHITECT, DPC.
Bid Document date of (10/27/2025).

Clarifications issued by this Addendum:

- Note: This Addendum changes the bid opening date.**

Project Manual Sections issued by this Addendum:

01 32 16B - Phasing and Staging Plans

08 32 00 – Sliding Glass Doors

Drawings issued by this Addendum:

AD2-P1 – REVISED KITCHEN DEMOLITION PLAN

AD2-P2 – REVISED KITCHEN CRAWLSPACE DOMESTIC PLAN

AD2-P3 – REVISED KITCHEN DOMESTIC PLAN

AD2-P4 – REVISED BOILER ROOM DOMESTIC PLAN

AD2-P5 – REVISED CRAWLSPACE SANITARY PLAN

AD2-P6 – REVISED KITCHEN SANITARY PLAN

Revisions to Project Manual issued by this Addendum:

ITEM AD2-1 Refer to 01 11 13 – Advertisement for Bid

AMEND Bid Opening Date to read: “Sealed bids will be received by the owner until 1:30 P.M. local time on January 27th, 2026, at Hammondsport Central School District Cafeteria, 8272 Main St. Hammondsport, NY 14840, at which time and place all bids will be opened and publicly read aloud.”

ITEM AD2-2 Refer to 01 32 16B - Phasing and Staging Plans

ADD Specification Section 01 32 16B - Phasing and Staging Plans in its entirety.

ITEM AD2-3 Refer to 08 32 00 – Sliding Glass Doors

ADD Specification Section 08 32 00 – Sliding Glass Doors in its entirety.

Revisions to Drawings issued by this Addendum:

ITEM AD2-4 Refer to MB-E1.2 – FIRST FLOOR POWER PLAN – AREA A

AMEND The text note that reads: “TYPICAL, PROVIDE CORD REEL.” Amend to read:
“TYPICAL, PROVIDE CORD REEL. BASIS OF DESIGN: HUBBELL #HBLI25123R20”,
as issued with this addendum.

ITEM AD2-5 Refer to MB-E0.1 – CRAWL SPACE DEMOLITION PLAN – AREA A

AMEND Note D16 to read “ELEVATOR TO UNDERGO MODERNIZATION. DISCONNECT
AND SECURE EXISTING CIRCUITRY FOR RE-USE. EXISTING DISCONNECT
SWITCH TO NOT BE RE-USED. REFER TO SPECIFICATION 14 28 19 – ELEVATOR
EQUIPMENT FOR MORE INFORMATION”, as issued with this addendum

ITEM AD2-6 Refer to MB-E1.3 – FIRST FLOOR POWER PLAN – AREA B

AMEND Note P3 to read “RE-CONNECT TO PREVIOUSLY SECURED CIRCUITRY FOR THE
ELEVATOR ONCE MODERNIZATION IS COMPLETE. ALL WORK SHOWN IS
DIAGRAMIC. PROVIDE NEW FUSED, LOCKABLE DISCONNECT SWITCH IN
SPACE. BASIS OF DESIGN FOR SWITCH BEING AN 225A / 3P TYPE 1 600V RATED,
WITH AUXILIARY CONTACTS. COORDINATE WITH OTHER TRADES PRIOR TO
ORDERING MATERIALS. REFER TO SPECIFICATION 14 28 19 – ELEVATOR
EQUIPMENT FOR MORE INFORMATION.”, as issued with this addendum.

ITEM AD2-7 Refer to MB-P0.1 – FIRST FLOOR DEMOLITION PLAN – AREA A

AMEND Detail #1 as shown on drawing AD2-P1 – REVISED KITCHEN DEMOLITION PLAN
as issued with this addendum.

ITEM AD2-8 Refer to MB-P1.1 – CRAWL SPACE SANITARY PLAN – AREA A

AMEND Detail #1 as shown on drawing AD2-P2 – REVISED KITCHEN CRAWLSPACE PLAN
as issued with this addendum.

ITEM AD2-9 Refer to MB-P2.1 – FIRST FLOOR DOMESTIC PLAN – AREA A

AMEND Detail #1 as shown on drawing AD2-P3 – REVISED KITCHEN DOMESTIC PLAN
as issued with this addendum.

ITEM AD2-10 Refer to MB-2.4 – TOILET ROOM AND BOILER ROOM DOMESTIC PLANS

AMEND Detail #3 as shown on drawing AD2-P4 – REVISED BOILER ROOM DOMESTIC PLAN
as issued with this addendum.

ITEM AD2-11 Refer to MB-P1.1 – CRAWL SPACE SANITARY PLAN

AMEND Detail #1 as shown on drawing AD2-P5 – REVISED CRAWL SPACE SANITARY PLAN
as issued with this addendum.

ITEM AD2-12 Refer to MB-P1.2 – FIRST FLOOR SANITARY PLAN – AREA A

AMEND Detail #1 as shown on drawing AD2-P6 – REVISED KITCHEN SANITARY PLAN
as issued with this addendum.

End of Addendum (2)

SECTION 08 32 00
SLIDING GLASS DOORS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Factory fabricated sliding glazed doors with frames and operating hardware.

1.2 RELATED REQUIREMENTS

- A. Section 06 10 00 - Rough Carpentry: Rough opening framing.
- B. Section 07 92 00 - Joint Sealants: Sealing joints between door frames and adjacent construction.
- C. Section 08 71 00 - Door Hardware.
- D. Section 08 80 00 - Glazing: Product and execution requirements for glass type and installation.

1.3 REFERENCE STANDARDS

- A. AAMA 611 - Specification for Anodized Architectural Aluminum; 2024.

1.4 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide component dimensions, information on glass and glazing, and descriptions of hardware and accessories.
- C. Shop Drawings: Indicate opening dimensions, elevations of different types, framed opening tolerances, and installation requirements.
 - 1. Include elevations and details indicating frame types, profiles, conditions at openings, methods and locations of anchoring, glazing requirements, hardware locations, and reinforcements for hardware, details of connections to special construction and other custom features.
 - 2. Use same reference numbers for openings as Contract Drawings.
- D. Samples: Two samples, 12 by 12 inch in size showing typical sliding door panel corner construction, accessories, and finishes.
- E. Door Hardware: Two samples of each type of hardware.
- F. Grade Substantiation: Prior to submitting shop drawings or starting fabrication, submit one of the following showing compliance with specified grade:
 - 1. Evidence of AAMA Certification; label or other documentation.
 - 2. Evidence of WDMA Certification.
 - 3. Evidence of CSA Certification.
 - 4. Test report(s) by independent testing agency itemizing compliance and acceptable to authorities having jurisdiction.
- G. Certificate: Certify that sliding glass doors meet or exceed specified requirements.
- H. Manufacturer's Installation Instructions: Include complete preparation, installation, and cleaning requirements.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section, with not less than three years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of type specified in this section, with at least three years of documented experience.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to project site and store in manufacturer's protective cartons until openings are ready for door installation.
- B. Protect finished surfaces with wrapping paper or strippable coating during installation. Do not use adhesive papers or sprayed coatings that bond to substrate when exposed to sunlight or weather.

1.7 FIELD CONDITIONS

- A. Do not install sealants when ambient temperature is less than 40 degrees F.
- B. Maintain this minimum temperature during and 24 hours after installation of sealants.

1.8 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals for additional warranty requirements.
- B. Correct defective work within a 2-year period after Date of Substantial Completion.
- C. Manufacturer Warranty: Provide 5-year manufacturer warranty against failure of glass seal on insulating glass units, including interpane dusting or misting. Include provision for replacement of failed units. Complete forms in Owner's name and register with manufacturer.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Aluminum Sliding Doors:
 - 1. Basis-of-Design Product: RACO 487 Flush Slider System. RACO Interior Products, 7354 Denny Road, Suite 100, Houston, Texas 77040, (800) 272 726, fax (713) 682 2079. .

2.2 SLIDING GLASS DOORS

- A. Interior Aluminum Sliding Doors: Extruded aluminum unit frame and operable panel frame, factory fabricated, factory glazed; complete with anchorage devices. No threshold in opening permitted.
 - 1. Configuration: as shown on the contract documents.
 - 2. Finish: Anodized Class 1.
 - 3. Color: Clear Anodized.
 - 4. Frame Depth: Flush frame depth of adjacent wall type.
 - 5. Aluminum Members: Factory finished; screw lock corner construction.
 - 6. Drainage: Provide drainage to exterior for moisture entering joints and glazing spaces and for condensation occurring within frame construction.
 - 7. Glass Stops: Same material and color as frame, sloped for wash.
 - 8. Operable Panels: Stainless steel bottom rollers; adjustable.
 - 9. Factory glazed with 3/8" clear tempered glass, grey EPDM glazing gaskets.

10. Factory pre-machine door frame jambs [and doors] and prepare for hardware, with concealed reinforcement plates, drilled and tapped as required, and fastened within frame with concealed screws.
 11. Factory finish extruded frame and door components so that all parts exposed to view upon completion of installation are uniform in finish and color. Exposed surfaces shall be free of scratches and other serious blemishes.
 12. Sliding Aluminum and Glass Doors: RACO Series 250 narrow stile, having square glazing stops and having ADA compliant bottom rail.
 13. Door Hardware: Vertical 36" length (20" Pull CTC) straight door pulls. Similar to Ives PR-9266/PR-9266F Straight Long Ladder Door Pull Pair, Back-to-Back Mount. Finish in Stainless Steel. Provide latch device, no locking function.
- B. Construction: Factory assemble door frame as one unit, including head jambs, and sill; factory assemble operating and fixed panels.
1. Sizes: Allow for tolerances of rough framed openings, clearances, and shims around perimeter of assemblies.
 2. Joints and Connections: Flush, hairline width, and waterproof; accurately and rigidly joined corners.
 3. Sills: One piece, sloped to drain, with integral roller track.

2.3 COMPONENTS

2.4 ASSEMBLY

- A. Factory assemble door frame as one unit, including head, jambs, and sill; factory assemble operating and fixed panels.
- B. Sizes: Allow for tolerances of rough framed openings, clearances, and shims around perimeter of assemblies.
- C. Joints and Connections: Flush, hairline width, and waterproof; accurately and rigidly joined corners.

2.5 ALUMINUM FINISHES

- A. Class I Natural Anodized Finish: AAMA 611 AA-M12C22A41, clear anodic coating not less than 0.7 mil thick.
- B. Color: Clear.

2.6 ACCESSORIES

- A. Pull Handles: Manufacturer's standard type.
- B. Sliding Panel Bottom Rollers: Stainless steel, adjustable from interior.
- C. Limit Stops: Resilient rubber.
- D. Anchors: Hot-dipped galvanized or stainless steel.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that openings are ready to receive work and opening dimensions and clearances are as indicated on shop drawings.

3.2 INSTALLATION

- A. Install sliding glass door units in accordance with manufacturer's instructions.
- B. Attach frame and shims to perimeter opening to accommodate construction tolerances and other irregularities.
- C. Use anchorage devices to securely fasten sliding door assembly to wall construction without distortion or imposed stresses.
- D. Install operating hardware.

3.3 TOLERANCES

- A. Maintain dimensional tolerances and alignment with adjacent work.
- B. Maximum Variation from Plumb: 1/16 inch.
- C. Maximum Variation from Level: 1/16 inch.
- D. Longitudinal or Diagonal Warp: Plus or minus 1/8 inch from 10 feet straight edge.

3.4 ADJUSTING

- A. Adjust hardware for smooth operation.



















































3.5 CLEANING





















- A. Remove protective material from factory finished surfaces.
- B. Remove labels and visible markings.
- C. Wash surfaces by method recommended and acceptable to sealant and sliding glass door manufacturer; rinse and wipe surfaces clean.
- D. Remove excess sealant by moderate use of mineral spirits or other solvent acceptable to sealant manufacturer.

3.6 PROTECTION

- A. Protect installed products from damage until Date of Substantial Completion.














































































END OF SECTION

Hammondsport CIP Bid Milestone Schedule																					
ID		Task Mode	Task Name	Duration	Start	Finish	Qtr 2		Qtr 3	Qtr 4	2026	Qtr 1	Qtr 2	Qtr 3	Qtr 4	2027	Qtr 1	Qtr 2	Qtr 3	Qtr 4	
0			Hammondsport CSD 2025 CIP	446 days	Mon 12/15/25	Mon 8/30/27															
1			Bidding & Project Documentation	75 days	Mon 12/15/25	Fri 3/27/26															
2			Project Bidding	32 days	Mon 12/15/25	Tue 1/27/26															
3			Descope Meetings	5 days	Wed 1/28/26	Tue 2/3/26															
4			BOE Award of Contract	1 day	Wed 2/11/26	Wed 2/11/26															
5			Notice to Proceed Letters and Contract	12 days	Thu 2/12/26	Fri 2/27/26															
6			Project Submittals	20 days	Mon 3/2/26	Fri 3/27/26															
7			Gymnasium & Locker Rooms	150 days	Mon 4/6/26	Fri 10/30/26															
8			Pre- Abatement Demo	17 days	Mon 4/6/26	Tue 4/28/26															
9			Abatement	17 days	Wed 4/29/26	Thu 5/21/26															
10			Wall Framing & Construction	15 days	Fri 5/22/26	Thu 6/11/26															
11			Structural Steel	15 days	Fri 6/12/26	Thu 7/2/26															
12			MEP Rough-ins	14 days	Fri 7/3/26	Wed 7/22/26															
13			Sheetrock & Tape	14 days	Thu 7/23/26	Tue 8/11/26															
14			Ceilings & Lighting	7 days	Wed 8/12/26	Thu 8/20/26															
15			Flooring & Tile	40 days	Wed 8/12/26	Tue 10/6/26															
16			Finishes	15 days	Wed 10/7/26	Tue 10/27/26															
17			Lockers, Benches, Accessories	10 days	Wed 10/7/26	Tue 10/20/26															
18			Punch List / Final Cleaning	8 days	Wed 10/21/26	Fri 10/30/26															
97			Bus Garage	70 days	Mon 6/1/26	Fri 9/4/26															
99			Bus Lift Replacement	30 days	Mon 6/1/26	Fri 7/10/26															
98			Site Work Improvements	40 days	Mon 6/29/26	Fri 8/21/26															
100			Building Renovations/ Improvements	40 days	Mon 6/29/26	Fri 8/21/26															
101			Punch List	10 days	Mon 8/24/26	Fri 9/4/26															
19			Kitchen	100 days	Wed 6/17/26	Tue 11/3/26															
20			Select Demo Starting After 1:15 PM Daily	8 days	Wed 6/17/26	Fri 6/26/26															
21			Demo	20 days	Mon 6/29/26	Fri 7/24/26															
22			Wall Framing & Construction	10 days	Mon 7/27/26	Fri 8/7/26															
23			MEP Rough-ins	20 days	Mon 8/10/26	Fri 9/4/26															
24			Sheetrock & Tape	5 days	Mon 9/7/26	Fri 9/11/26															
25			Flooring & Finishes	20 days	Mon 9/7/26	Fri 10/2/26															
26			HVAC ductwork, hoods, exhaust	10 days	Mon 9/14/26	Fri 9/25/26															
27			Ceiling / Lighting	10 days	Mon 9/14/26	Fri 9/25/26															
28			Casework & Equipment Install	20 days	Mon 10/5/26	Fri 10/30/26															
29			Punch List / Final Cleaning / Inspections	2 days	Mon 11/2/26	Tue 11/3/26															
83			Canopy	90 days	Mon 6/29/26	Fri 10/30/26															
84			Demolition and Utility Work	20 days	Mon 6/29/26	Fri 7/24/26															
85			Foundations	10 days	Mon 7/27/26	Fri 8/7/26															
86			Site Concrete	10 days	Mon 8/10/26	Fri 8/21/26															
87			Structural Steel	10 days	Mon 8/24/26	Fri 9/4/26															
88			Roofing	10 days	Mon 9/7/26	Fri 9/18/26															
Page 1																					


Hammondsport CIP Bid Milestone Schedule																	
ID		Task Mode	Task Name	Duration	Start	Finish				2026				2027			
							Qtr 2	Qtr 3	Qtr 4	Qtr 1	Qtr 2	Qtr 3	Qtr 4	Qtr 1	Qtr 2	Qtr 3	Qtr 4
89			Masonry	15 days	Mon 9/21/26	Fri 10/9/26											
90			Finishes	15 days	Mon 10/12/26	Fri 10/30/26											
91			Main Entrance Renovation	65 days	Mon 6/29/26	Fri 9/25/26											
92			Demo	10 days	Mon 6/29/26	Fri 7/10/26											
93			Wall Framing/ Doors/ Frames	15 days	Mon 7/13/26	Fri 7/31/26											
94			MEP Rough Ins	10 days	Mon 8/3/26	Fri 8/14/26											
95			Board and Finish	10 days	Mon 8/17/26	Fri 8/28/26											
96			Finishes	20 days	Mon 8/31/26	Fri 9/25/26											
102			Elevator Work	40 days	Mon 6/29/26	Fri 8/21/26											
103			Elevator Improvements	40 days	Mon 6/29/26	Fri 8/21/26											
104			Main Building Sitework	290 days	Mon 6/29/26	Fri 8/6/27											
107			Site Concrete and Walkways	60 days	Mon 7/27/26	Fri 10/16/26											
105			Field Grading Improvements	40 days	Mon 4/5/27	Fri 5/28/27											
106			Playground Improvements	30 days	Mon 6/28/27	Fri 8/6/27											
30			Library	90 days	Mon 12/28/26	Fri 4/30/27											
31			Demo	14 days	Mon 12/28/26	Thu 1/14/27											
32			Wall Framing	7 days	Fri 1/15/27	Mon 1/25/27											
33			MEP Rough-ins	14 days	Tue 1/26/27	Fri 2/12/27											
34			Sheetrock & Tape	7 days	Mon 2/15/27	Tue 2/23/27											
35			Partitions & Storefronts	10 days	Wed 2/24/27	Tue 3/9/27											
36			Casework	10 days	Wed 2/24/27	Tue 3/9/27											
37			Ceilings & Lighting	10 days	Wed 3/10/27	Tue 3/23/27											
38			Paint	10 days	Wed 3/10/27	Tue 3/23/27											
39			Flooring	15 days	Wed 3/24/27	Tue 4/13/27											
40			Technology & Infrastructure	5 days	Wed 4/14/27	Tue 4/20/27											
41			Punchlist / Final Cleaning	8 days	Wed 4/21/27	Fri 4/30/27											
42			Room 140E	25 days	Mon 12/28/26	Fri 1/29/27											
43			Demo	5 days	Mon 12/28/26	Fri 1/1/27											
44			Construction	10 days	Mon 1/4/27	Fri 1/15/27											
45			Finishes	5 days	Mon 1/18/27	Fri 1/22/27											
46			Punchlist	5 days	Mon 1/25/27	Fri 1/29/27											
47			Student Support Services Suite	90 days	Mon 12/28/26	Fri 4/30/27											
48			Demo and Abatement	20 days	Mon 12/28/26	Fri 1/22/27											
49			Wall Framing and Infills	25 days	Mon 1/25/27	Fri 2/26/27											
50			MEP Rough-ins	10 days	Mon 3/1/27	Fri 3/12/27											
51			Sheetrock & Tape	10 days	Mon 3/15/27	Fri 3/26/27											
52			Ceilings & Lighting	10 days	Mon 3/29/27	Fri 4/9/27											
53			Paint	10 days	Mon 3/29/27	Fri 4/9/27											
54			Casework	10 days	Mon 3/29/27	Fri 4/9/27											
55			Flooring	10 days	Mon 4/12/27	Fri 4/23/27											
56			Punchlist & Final Cleaning	5 days	Mon 4/26/27	Fri 4/30/27											

Page 2

ALL ASBESTOS CONTAINING MATERIAL REMOVALS MUST OCCUR ON SECOND SHIFT STARTING AT 3:30 PM


Hammondsport CIP Bid Milestone Schedule																	
ID		Task Mode	Task Name	Duration	Start	Finish				2026				2027			
							Qtr 2	Qtr 3	Qtr 4	Qtr 1	Qtr 2	Qtr 3	Qtr 4	Qtr 1	Qtr 2	Qtr 3	Qtr 4
79			Rooms 134 & 152 (Music)	10 days	Mon 4/19/27	Fri 4/30/27											
80			Demo	2 days	Mon 4/19/27	Tue 4/20/27											
81			Ceilings & Lights	6 days	Wed 4/21/27	Wed 4/28/27											
82			Final Clean and Owner Turnover	2 days	Thu 4/29/27	Fri 4/30/27											
57			First Floor Bathrooms (Alternate)	46 days	Mon 6/28/27	Mon 8/30/27											
58			Demo	7 days	Mon 6/28/27	Tue 7/6/27											
59			Cast Underlayment	5 days	Wed 7/7/27	Tue 7/13/27											
60			Wall Framing	5 days	Wed 7/14/27	Tue 7/20/27											
61			Plumbing & Rough-ins	5 days	Wed 7/21/27	Tue 7/27/27											
62			Sheetrock & Tape	2 days	Wed 7/28/27	Thu 7/29/27											
63			Tile & Flooring	15 days	Fri 7/30/27	Thu 8/19/27											
64			Ceilings	5 days	Fri 7/30/27	Thu 8/5/27											
65			Paint	3 days	Fri 7/30/27	Tue 8/3/27											
66			Fixtures & Partitions	5 days	Fri 8/20/27	Thu 8/26/27											
67			Punchlist & Final Cleaning	2 days	Fri 8/27/27	Mon 8/30/27											
68			Second Floor Bathrooms (Alternate)	46 days	Mon 6/28/27	Mon 8/30/27											
69			Demo	7 days	Mon 6/28/27	Tue 7/6/27											
70			Cast Underlayment	5 days	Wed 7/7/27	Tue 7/13/27											
71			Wall Framing	5 days	Wed 7/14/27	Tue 7/20/27											
72			Plumbing & Rough-ins	5 days	Wed 7/21/27	Tue 7/27/27											
73			Sheetrock & Tape	2 days	Wed 7/28/27	Thu 7/29/27											
74			Tile & Flooring	15 days	Fri 7/30/27	Thu 8/19/27											
75			Ceilings	5 days	Fri 7/30/27	Thu 8/5/27											
76			Paint	3 days	Fri 7/30/27	Tue 8/3/27											
77			Fixtures & Partitions	5 days	Fri 8/20/27	Thu 8/26/27											
78			Punchlist & Final Cleaning	2 days	Fri 8/27/27	Mon 8/30/27											
108			Air Conditioning	225 days	Mon 6/29/26	Fri 5/7/27											
109			Rooms 201, 202, 203, 204, 204a, 205, 206, 207, 209	14 days	Mon 6/29/26	Thu 7/16/26											
110			Demo	10 days	Mon 6/29/26	Fri 7/10/26											
111			EV Installation & Rough ins	25 days	Mon 7/13/26	Fri 8/14/26											
112			Controls Contractor Unit Check Out	10 days	Mon 8/17/26	Fri 8/28/26											
113			Ceilings & Lights	10 days	Mon 8/17/26	Fri 8/28/26											
114			Final Clean and Owner Turnover	5 days	Mon 8/31/26	Fri 9/4/26											
115			Rooms 122, 124, 126, 128, 130 (UV's)	17 days	Mon 2/15/27	Tue 3/9/27											
116			Take over two rooms at a time, allowing two weeks per room. Coordinate the exact rooms with	55 days	Mon 2/15/27	Fri 4/30/27											
117			Rooms 222, 224, 226, 228, 230, 234	55 days	Mon 2/15/27	Fri 4/30/27											
118			Take over two rooms at a time, allowing two weeks per room. Coordinate the exact rooms with	60 days	Mon 2/15/27	Fri 5/7/27											

Page 3

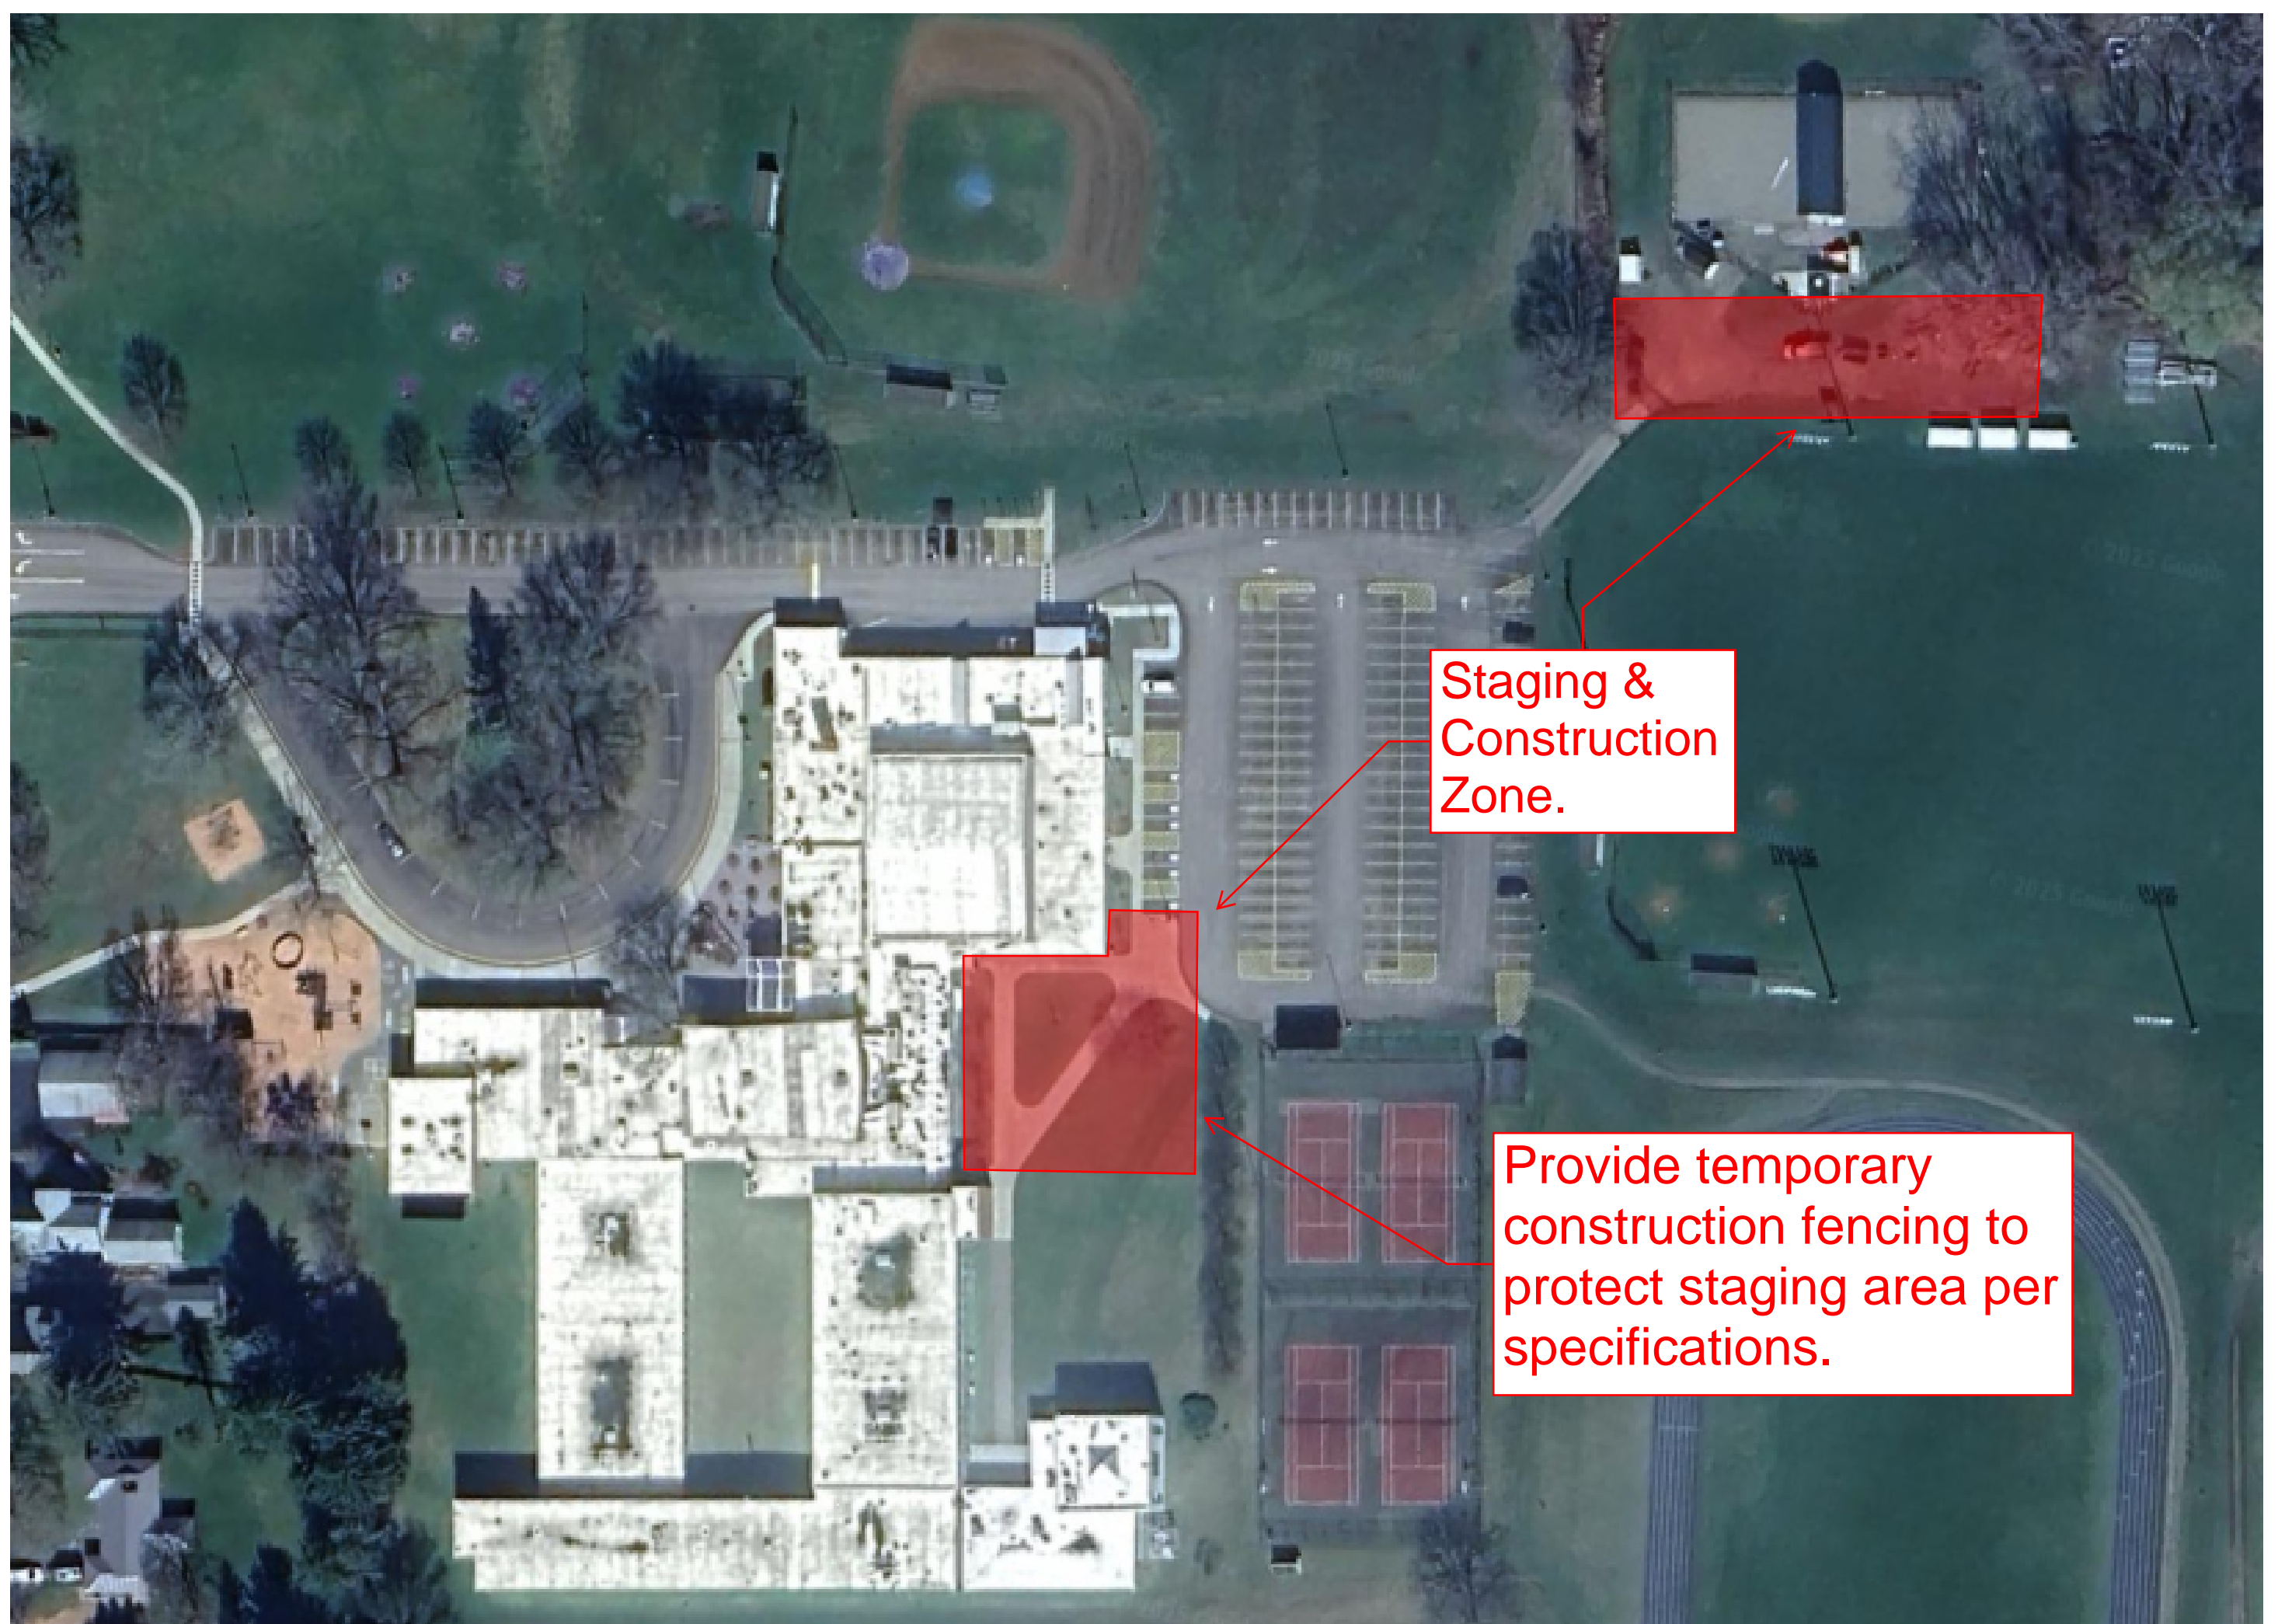

Staging &
Construction
Zone.

Provide temporary
construction fencing to
protect staging area per
specifications.

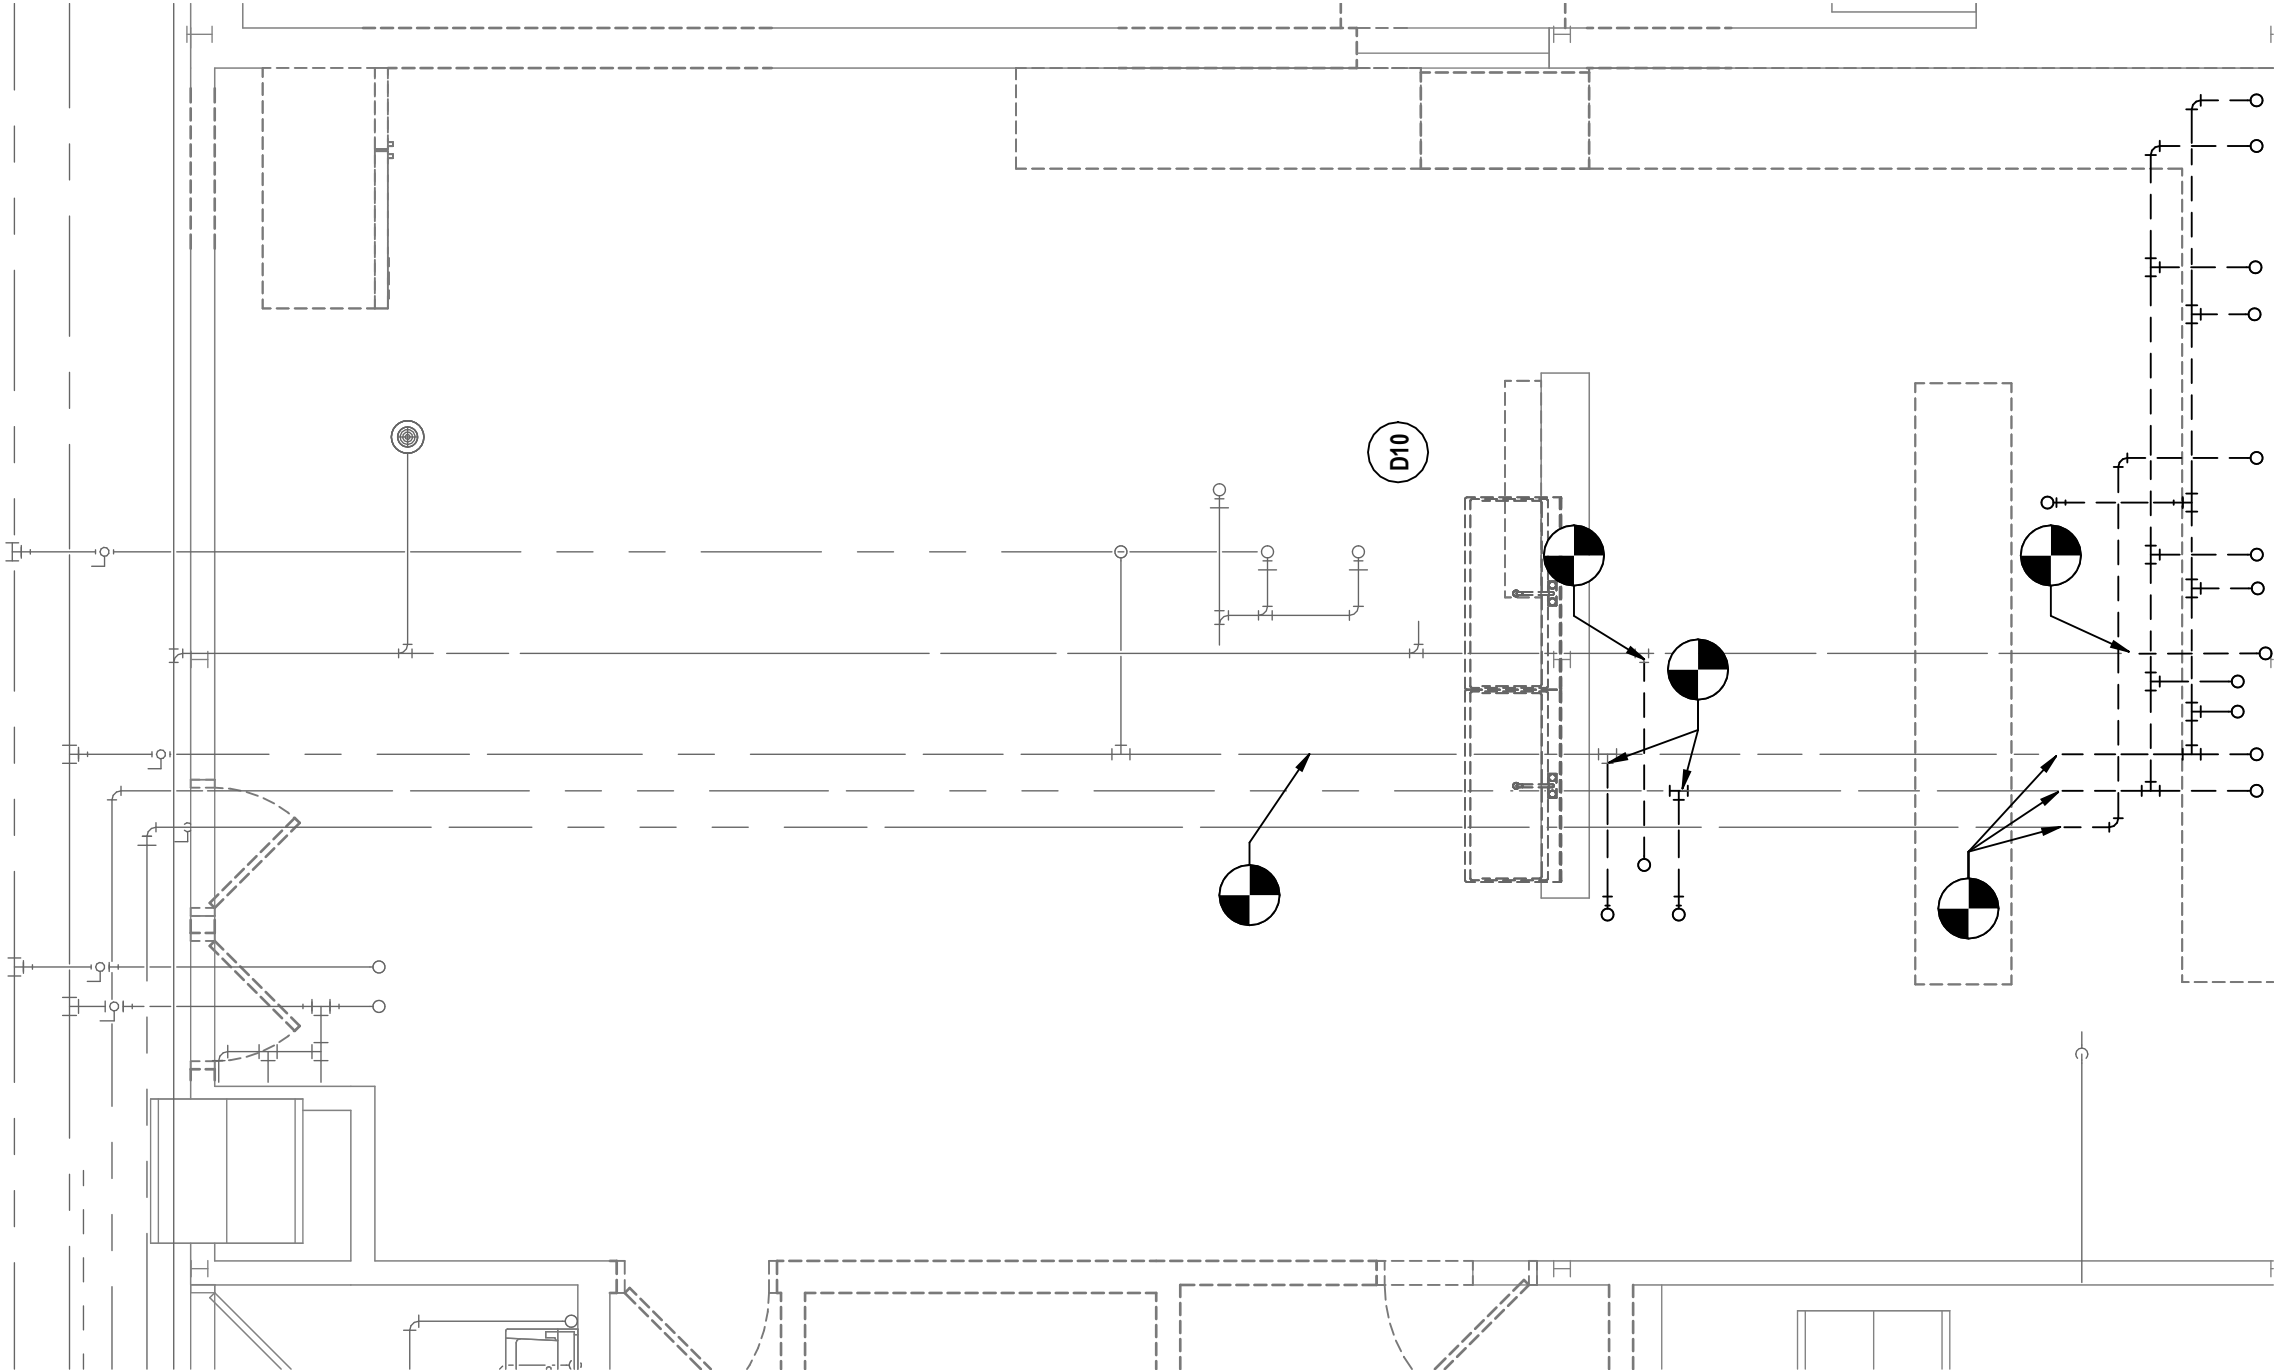

1 REVISED KITCHEN DEMOLITION PLAN
1/4" = 1'-0"

SED NUMBER: MB: 57-29-01-04-0-002-025 BG: 57-29-01-04-5-003-008

REVISED KITCHEN DEMOLITION PLAN
2025 CAPITAL IMPROVEMENTS PROJECT
HAMMONDSPOORT CSD
8272 MAIN STREET HAMMONDSPOORT, NEW YORK, 14840

HUNT ENGINEERS | ARCHITECTS | SURVEYORS
HORSEHEADS, NY 607 - 358 - 1000 ROCHESTER, NY 585 - 327 - 7950
TOWANDA, PA 570 - 265 - 4868 BINGHAMTON, NY 607 - 798 - 8081
ALBANY, NY 607 - 798 - 8081 WWW.HUNT-EAS.COM
NY CERTIFICATE NO. 0018220 PA CERTIFICATE NO. TSC2203131464-1

DRAWN BY: CJH
CHECKED BY: JDG
DATE: 01/06/26
Copyright: 2025

"IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER'S ARCHITECT'S OR SURVEYOR'S SEAL."

AD2-P1

PROJECT NO: 1925-014



8272 MAIN STREET HAMMONDSPORT, NEW YORK, 14840


PROJECT NO: 1925-014

HUNT ENGINEERS | ARCHITECTS | SURVEYORS
HORSEHEADS, NY 607-358-1000 ROCHESTER, NY 585-327-7950
TOWANDA, PA 570-265-4868 BINGHAMTON, NY 607-798-8081
ALBANY, NY 607-798-8081 WWW.HUNT-EAS.COM
NY CERTIFICATE NO. 0018220 PA CERTIFICATE NO. TSC2203131464-1

DRAWN BY:	CJH	Copyright: 2025
CHECKED BY:	JDG	
DATE:	01/06/26	

"IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER'S, ARCHITECT'S OR SURVEYOR'S SEAL."

NY CERTIFICATE NO. 0018220 PA CERTIFICATE NO. TSC2203131464-1
 REBANT, NY 001-730-0001 WWW.HIGHTEC.COM

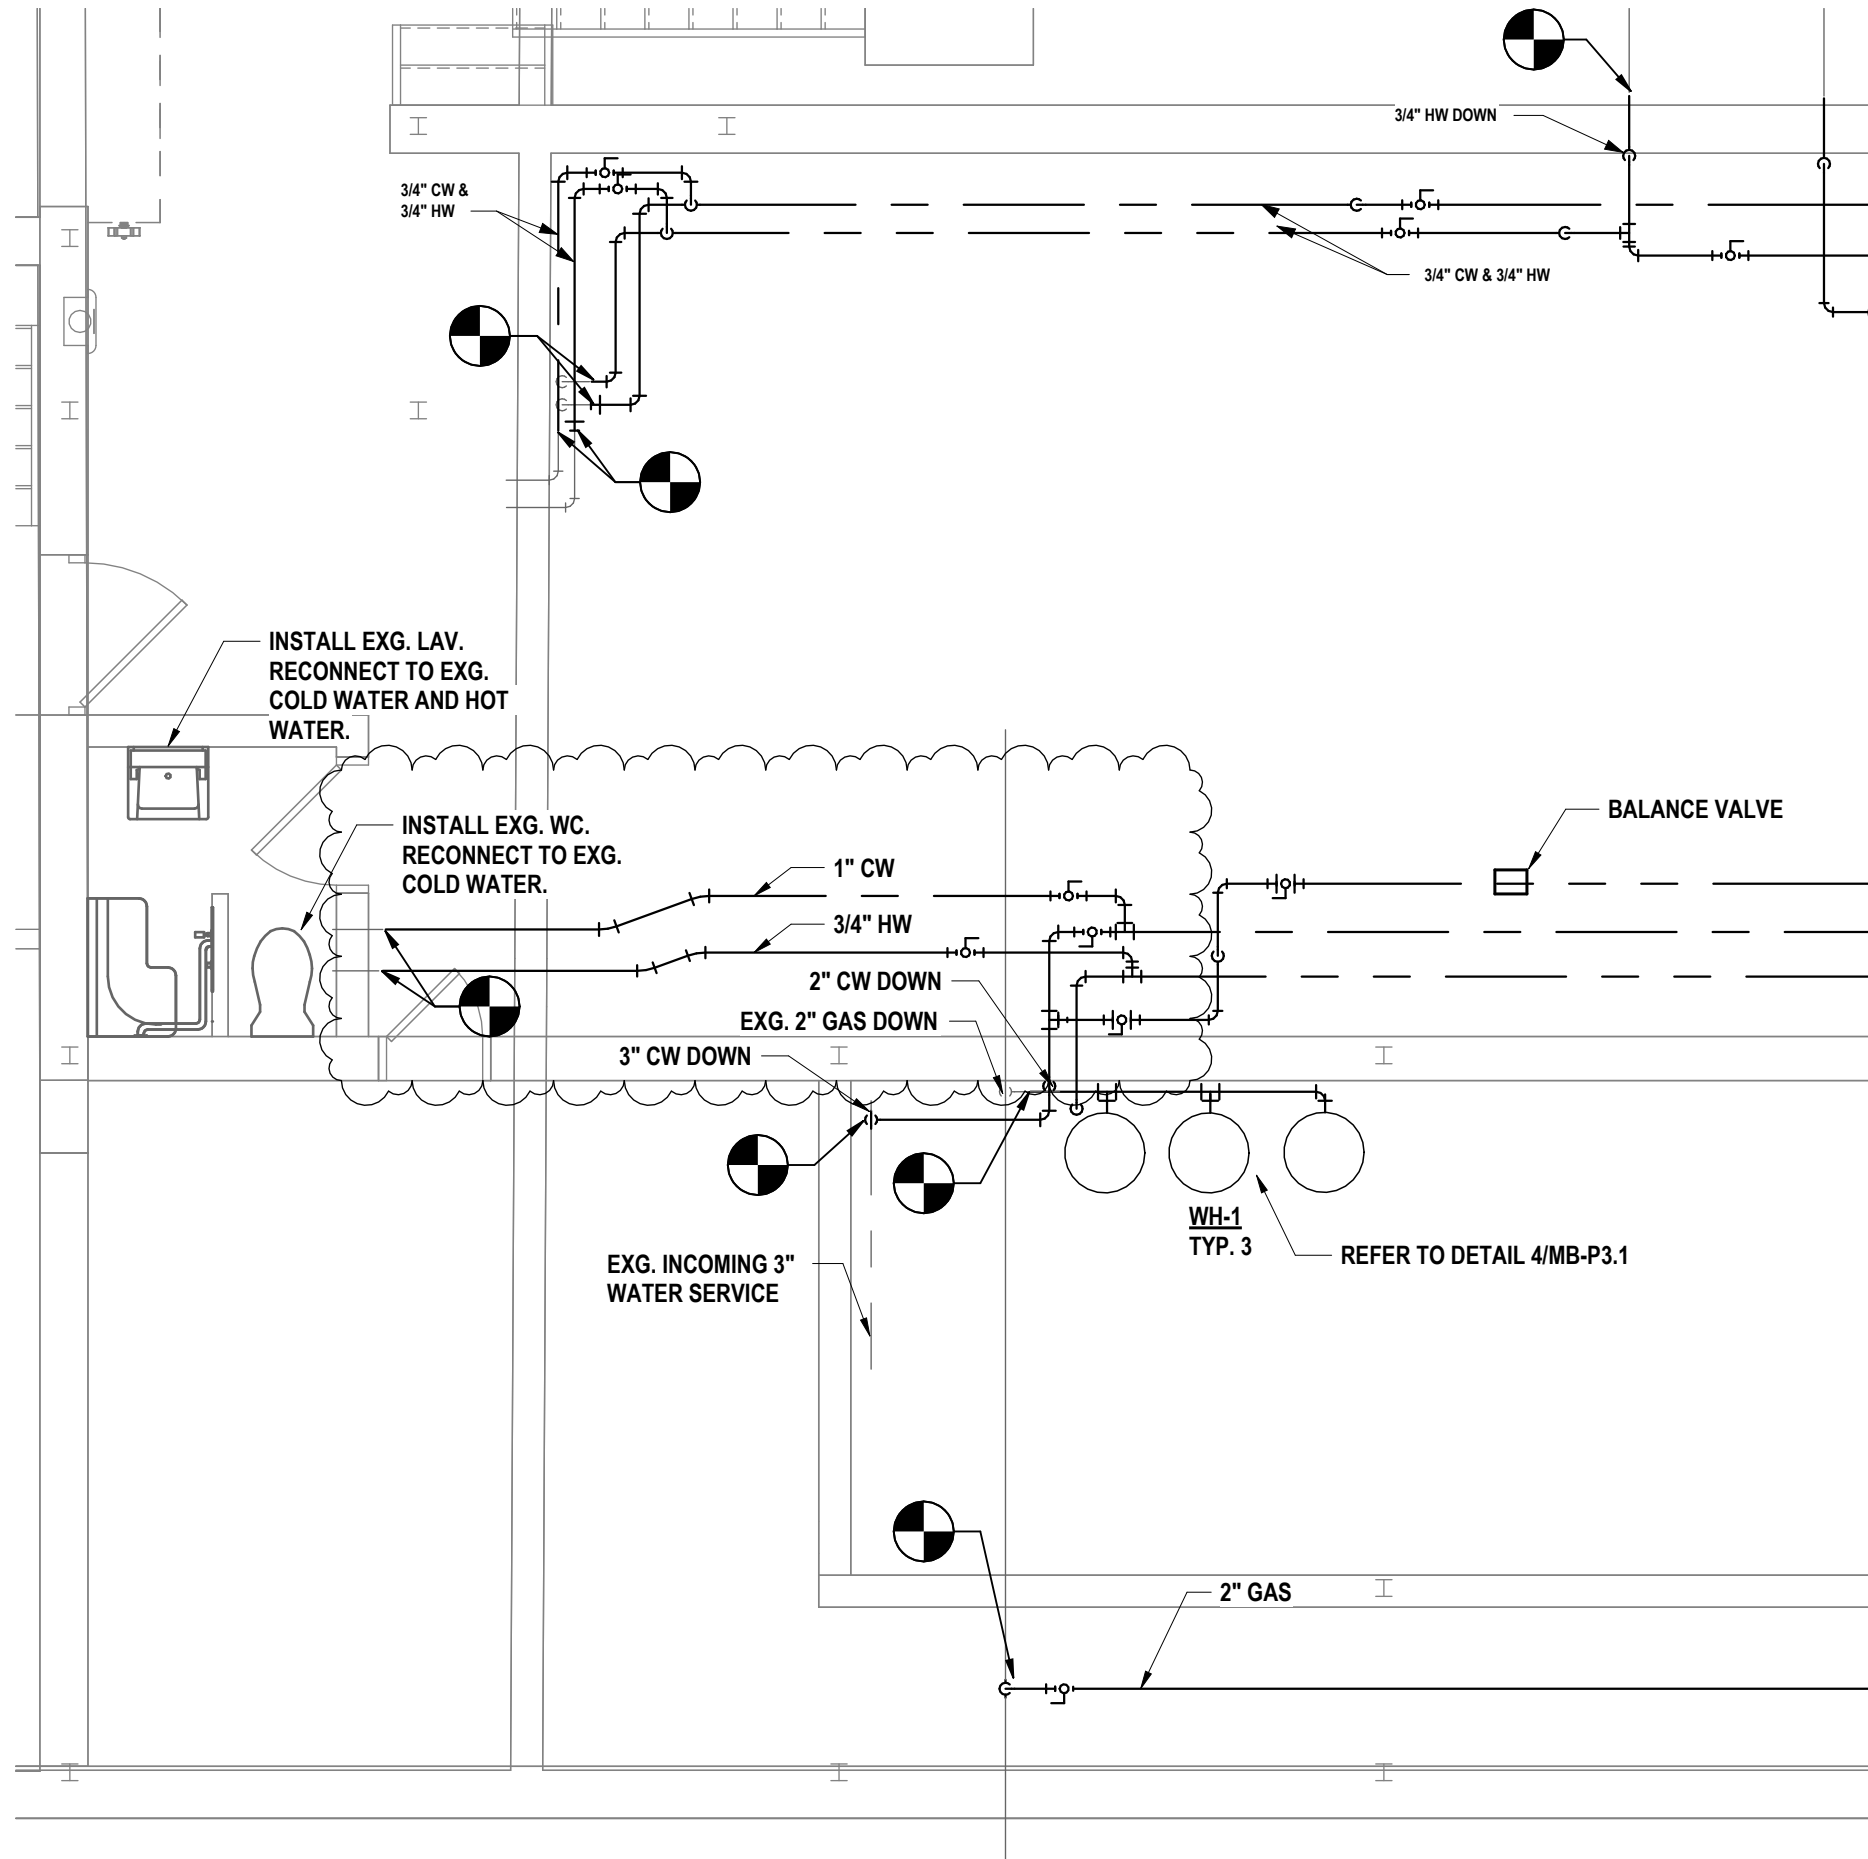

1 REVISED BOILER ROOM DOMESTIC PLAN
1/4" = 1'-0"

SED NUMBER: MB: 57-29-01-04-0-002-025 BG: 57-29-01-04-5-003-008

REVISOR: MB: 57-29-01-04-0-002-025 BG: 57-29-01-04-5-003-008

REVISED BOILER ROOM DOMESTIC PLAN

2025 CAPITAL IMPROVEMENTS PROJECT

HAMMONDSPT CSD

8272 MAIN STREET HAMMONDSPT, NEW YORK, 14840

AD2-P4


PROJECT NO: 1925-014

DRAWN BY: CJH
CHECKED BY: JDG
DATE: 01/06/26
Copyright: 2025

"IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER'S, ARCHITECT'S OR SURVEYOR'S SEAL."

HUNT ENGINEERS | ARCHITECTS | SURVEYORS

HORSEHEADS, NY 607 - 358 - 1000 ROCHESTER, NY 585 - 327 - 7950
TOWANDA, PA 570 - 265 - 4868 BINGHAMTON, NY 607 - 798 - 8081
ALBANY, NY 607 - 798 - 8081 WWW.HUNT-EAS.COM
NY CERTIFICATE NO. 0018220 PA CERTIFICATE NO. TSC2203131464-1

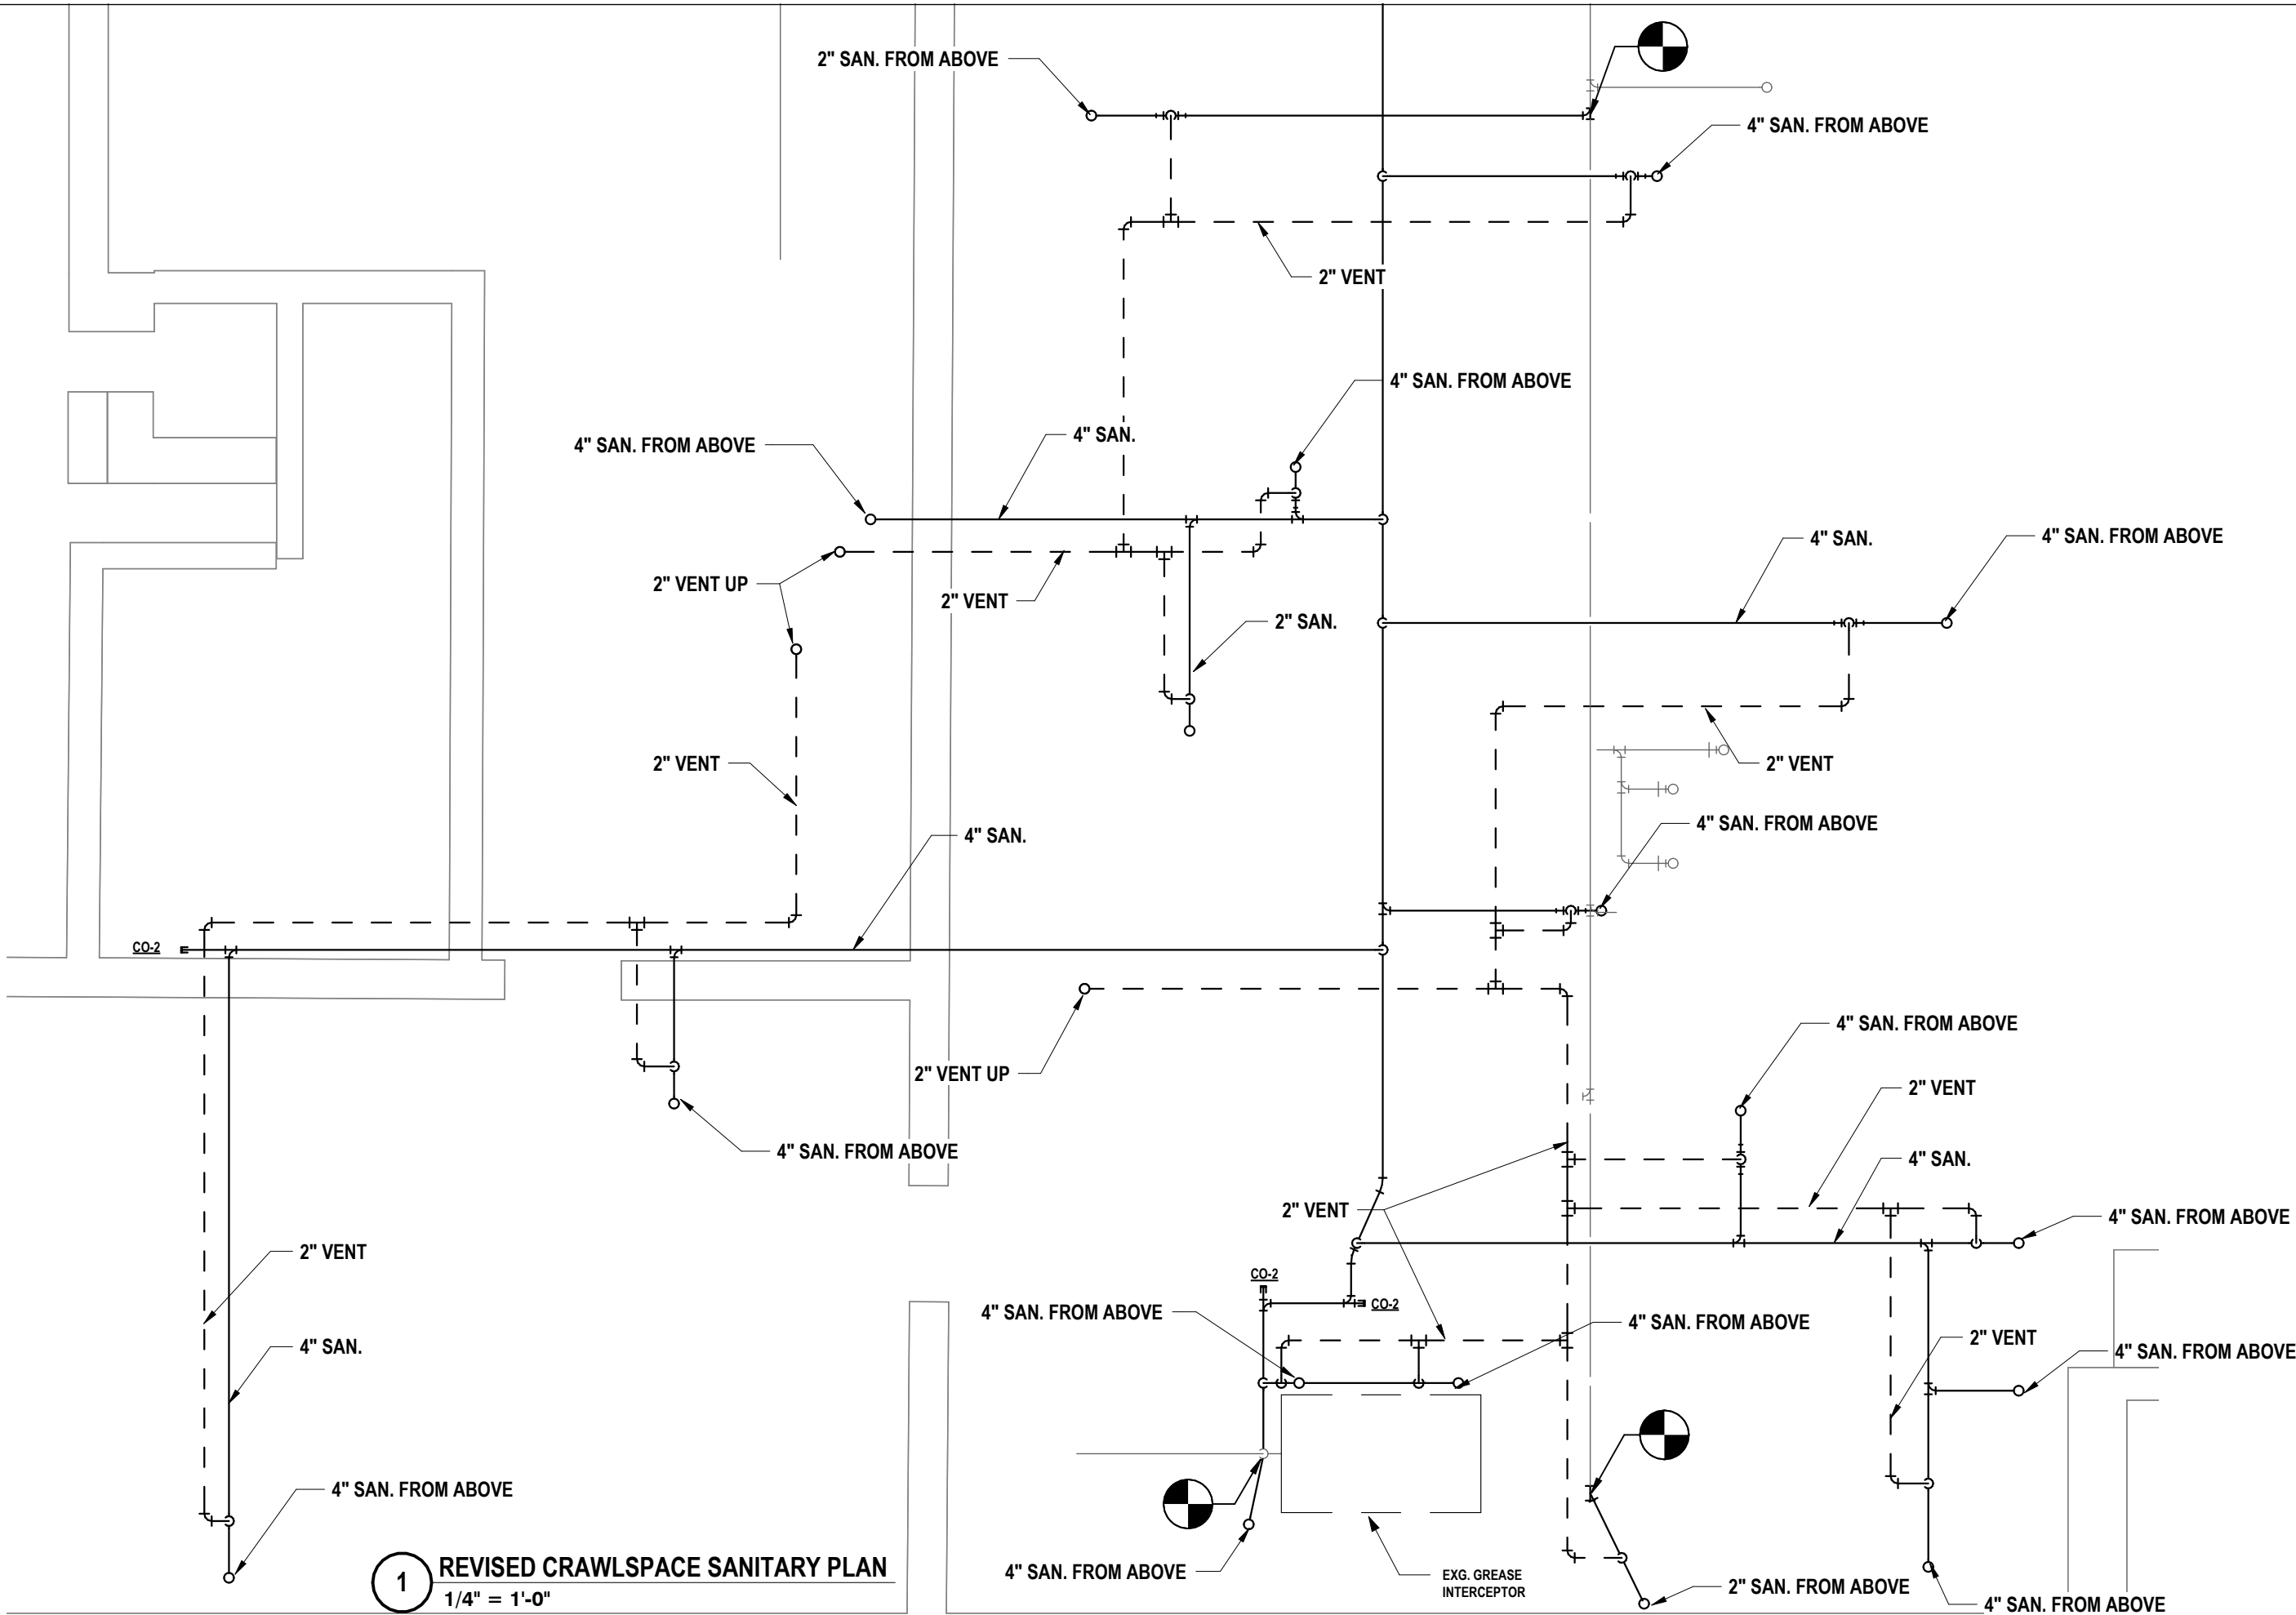

1 **REVISED CRAWLSPACE SANITARY PLAN**
1/4" = 1'-0"

DRAWN BY:	CJH
CHECKED BY:	JDG
DATE:	01/06/26

"IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER'S, ARCHITECT'S OR SURVEYOR'S SEAL."


HUNT ENGINEERS | ARCHITECTS | SURVEYORS
HORSEHEADS, NY 607 - 358 - 1000 ROCHESTER, NY 585 - 327 - 7950
TOWANDA, PA 570 - 265 - 4868 BINGHAMTON, NY 607 - 798 - 8081
ALBANY, NY 607 - 798 - 8081 WWW.HUNT-EAS.COM
NY CERTIFICATE NO. 0018220 PA CERTIFICATE NO. TSC2203131464-1

REVISED CRAWLSPACE SANITARY PLAN
2025 CAPITAL IMPROVEMENTS PROJECT
HAMMONDSPORT CSD
8272 MAIN STREET HAMMONDSPORT, NEW YORK, 14840

AD2-P5

PROJECT NO: 1925-014

SED NUMBER: MB: 57-29-01-04-0-002-025 BG: 57-29-01-04-5-003-008

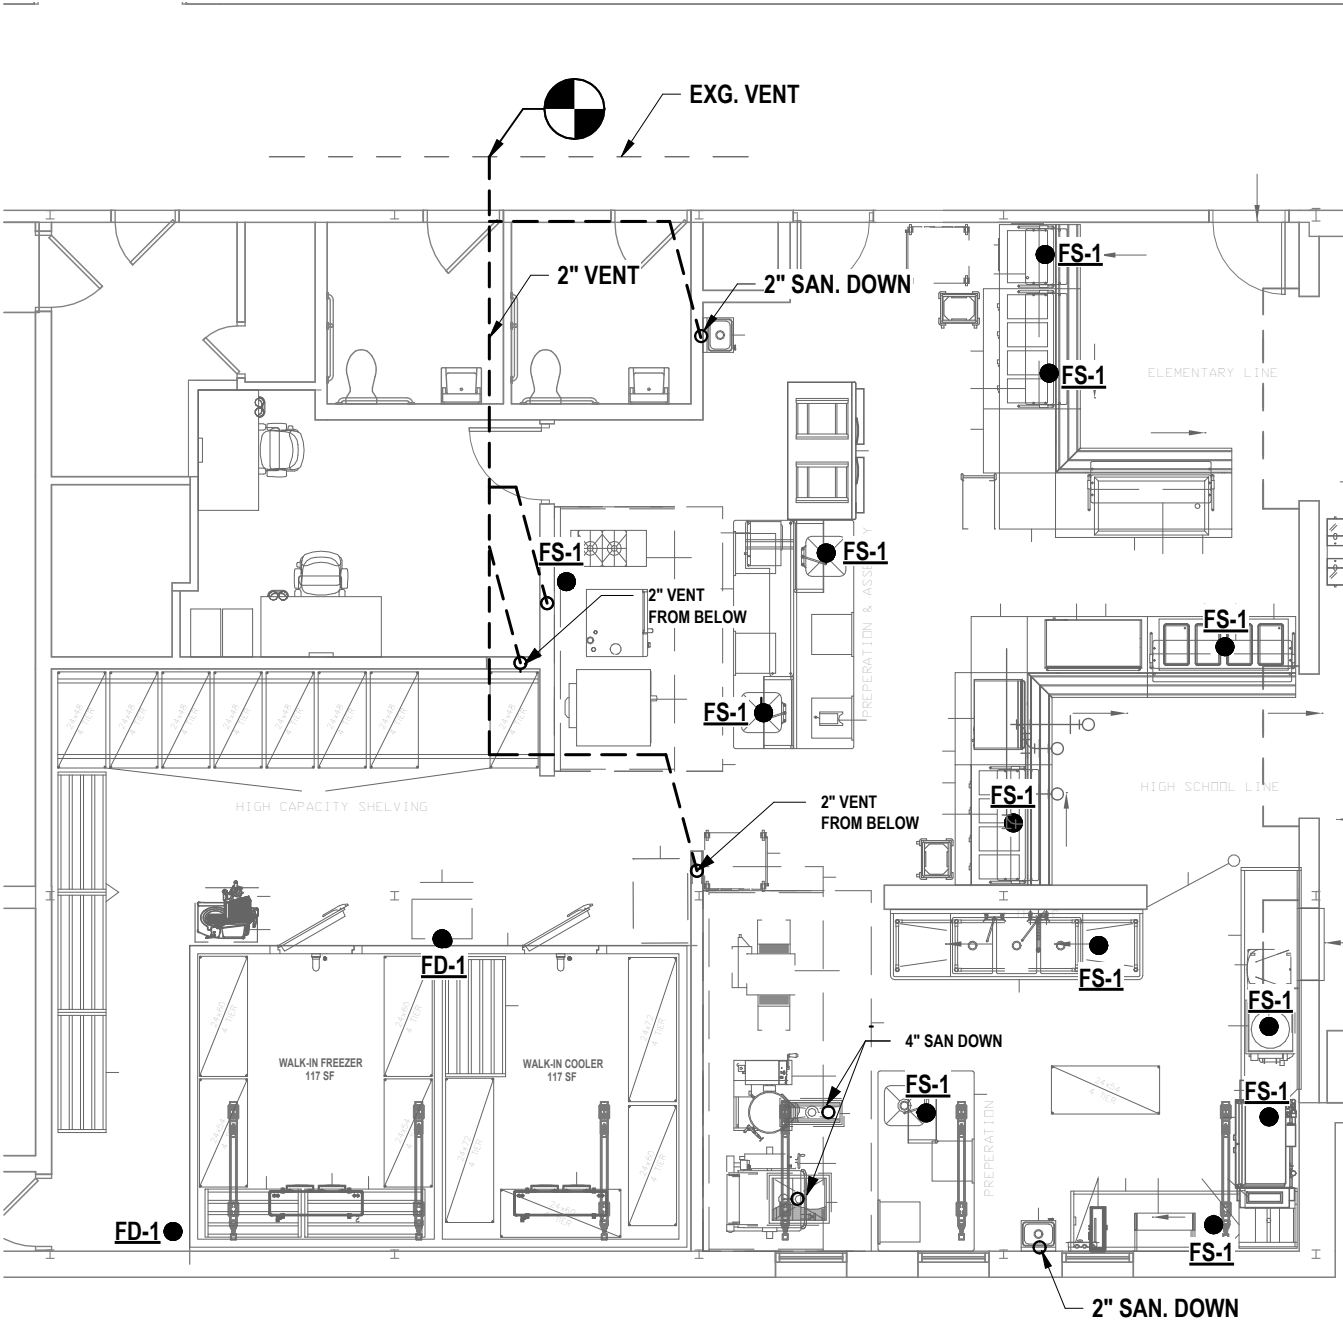

1 REVISED KITCHEN SANITARY PLAN
1/8" = 1'-0"

DRAWN BY: CJH

CHECKED BY: JDG

DATE: 01/06/26

Copyright: 2025

IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS BEARING A LICENSED ENGINEER'S, ARCHITECT'S OR SURVEYOR'S SEAL.

HUNT

ENGINEERS | ARCHITECTS | SURVEYORS

HORSEHEADS, NY 607 - 358 - 1000 ROCHESTER, NY 585 - 327 - 7950

TOWANDA, PA 570 - 265 - 4868 BINGHAMTON, NY 607 - 798 - 8081

ALBANY, NY 607 - 798 - 8081 WWW.HUNT-EAS.COM

NY CERTIFICATE NO. 0018220 PA CERTIFICATE NO. TSC2203131464-1

SED NUMBER: MB: 57-29-01-04-0-002-025 BG: 57-29-01-04-5-003-008

REVISED KITCHEN SANITARY PLAN

2025 CAPITAL IMPROVEMENTS PROJECT

HAMMONDSPOrt CSD

8272 MAIN STREET HAMMONDSPOrt, NEW YORK, 14840

AD2-P6

PROJECT NO: 1925-014

April 6th 2026 -
Nov 1st 2026

June 29th 2026 -
Nov 1st 2026

Christmas Break
2026 - February
1st

Christmas
Break 2026 -
May 1st 2027

Christmas
Break 2026 -
May 1st 2027

1:15pm Dismissals Start
June 17th to Begin
Cafe/Kitchen Work

June 29th 2026 -
Nov 1st 2026

Summer 2026

Temp Wall with
Power for Start of
2026 School Year

Provide Four (4)
120V Circuits

Temp Wall

Summer 2026
Pending Lead
Times


Temp Wall

Summer 2027

Spring Break 2027
Plus 1 Week

UV Replacements: Take over
two rooms at a time, allowing
two weeks per room.
Coordinate the exact rooms
with the owner. Starting Q1
2027

1 FIRST FLOOR KEY PLAN
1/16" = 1'-0"

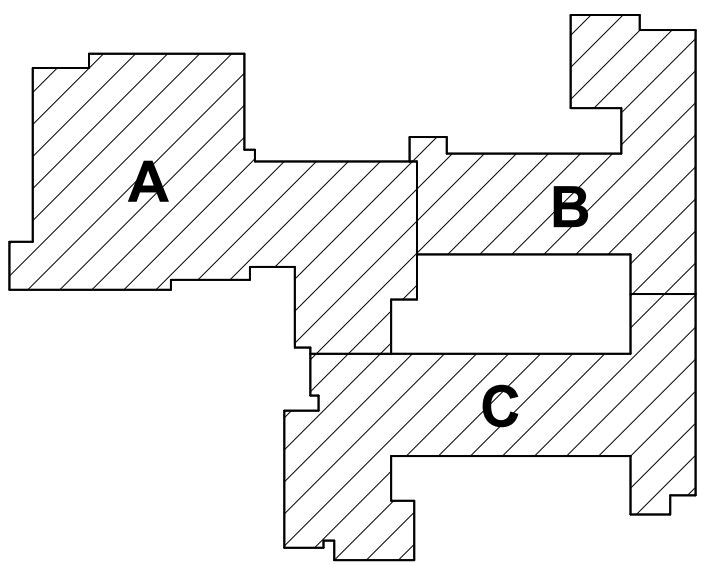


DRAWN BY:	KLC
CHECKED BY:	JL
DATE:	10/27/2025
PHASE:	CD

DESCRIPTION OF WORK
DATE: 10/27/2025
11. IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADJUSTMENTS TO PLANS
DRAWING A LICENSED ARCHITECT'S OR SURVEYOR'S SEAL.

HUNT ENGINEERS ARCHITECTS IS
HORSEHEADS, NY 10823-1000 ROCHESTER, NY 585-337-7848 TOWNAND, PA 670-265-4666
BINGHAMTON, NY 607-738-8881 ALBANY, NY 607-738-8801
WWW.HUNTEAS.COM
NY CERTIFICATE NO. 001620 PA CERTIFICATE NO. 1SC220013464-1

FIRST FLOOR KEY PLAN
2025 CAPITAL IMPROVEMENTS PROJECT
HAMMONDSPOORT CENTRAL SCHOOL DISTRICT
8272 MAIN STREET HAMMONDSPOORT NEW YORK 14840

MB-A1.0A
PROJECT NO: 1925.014

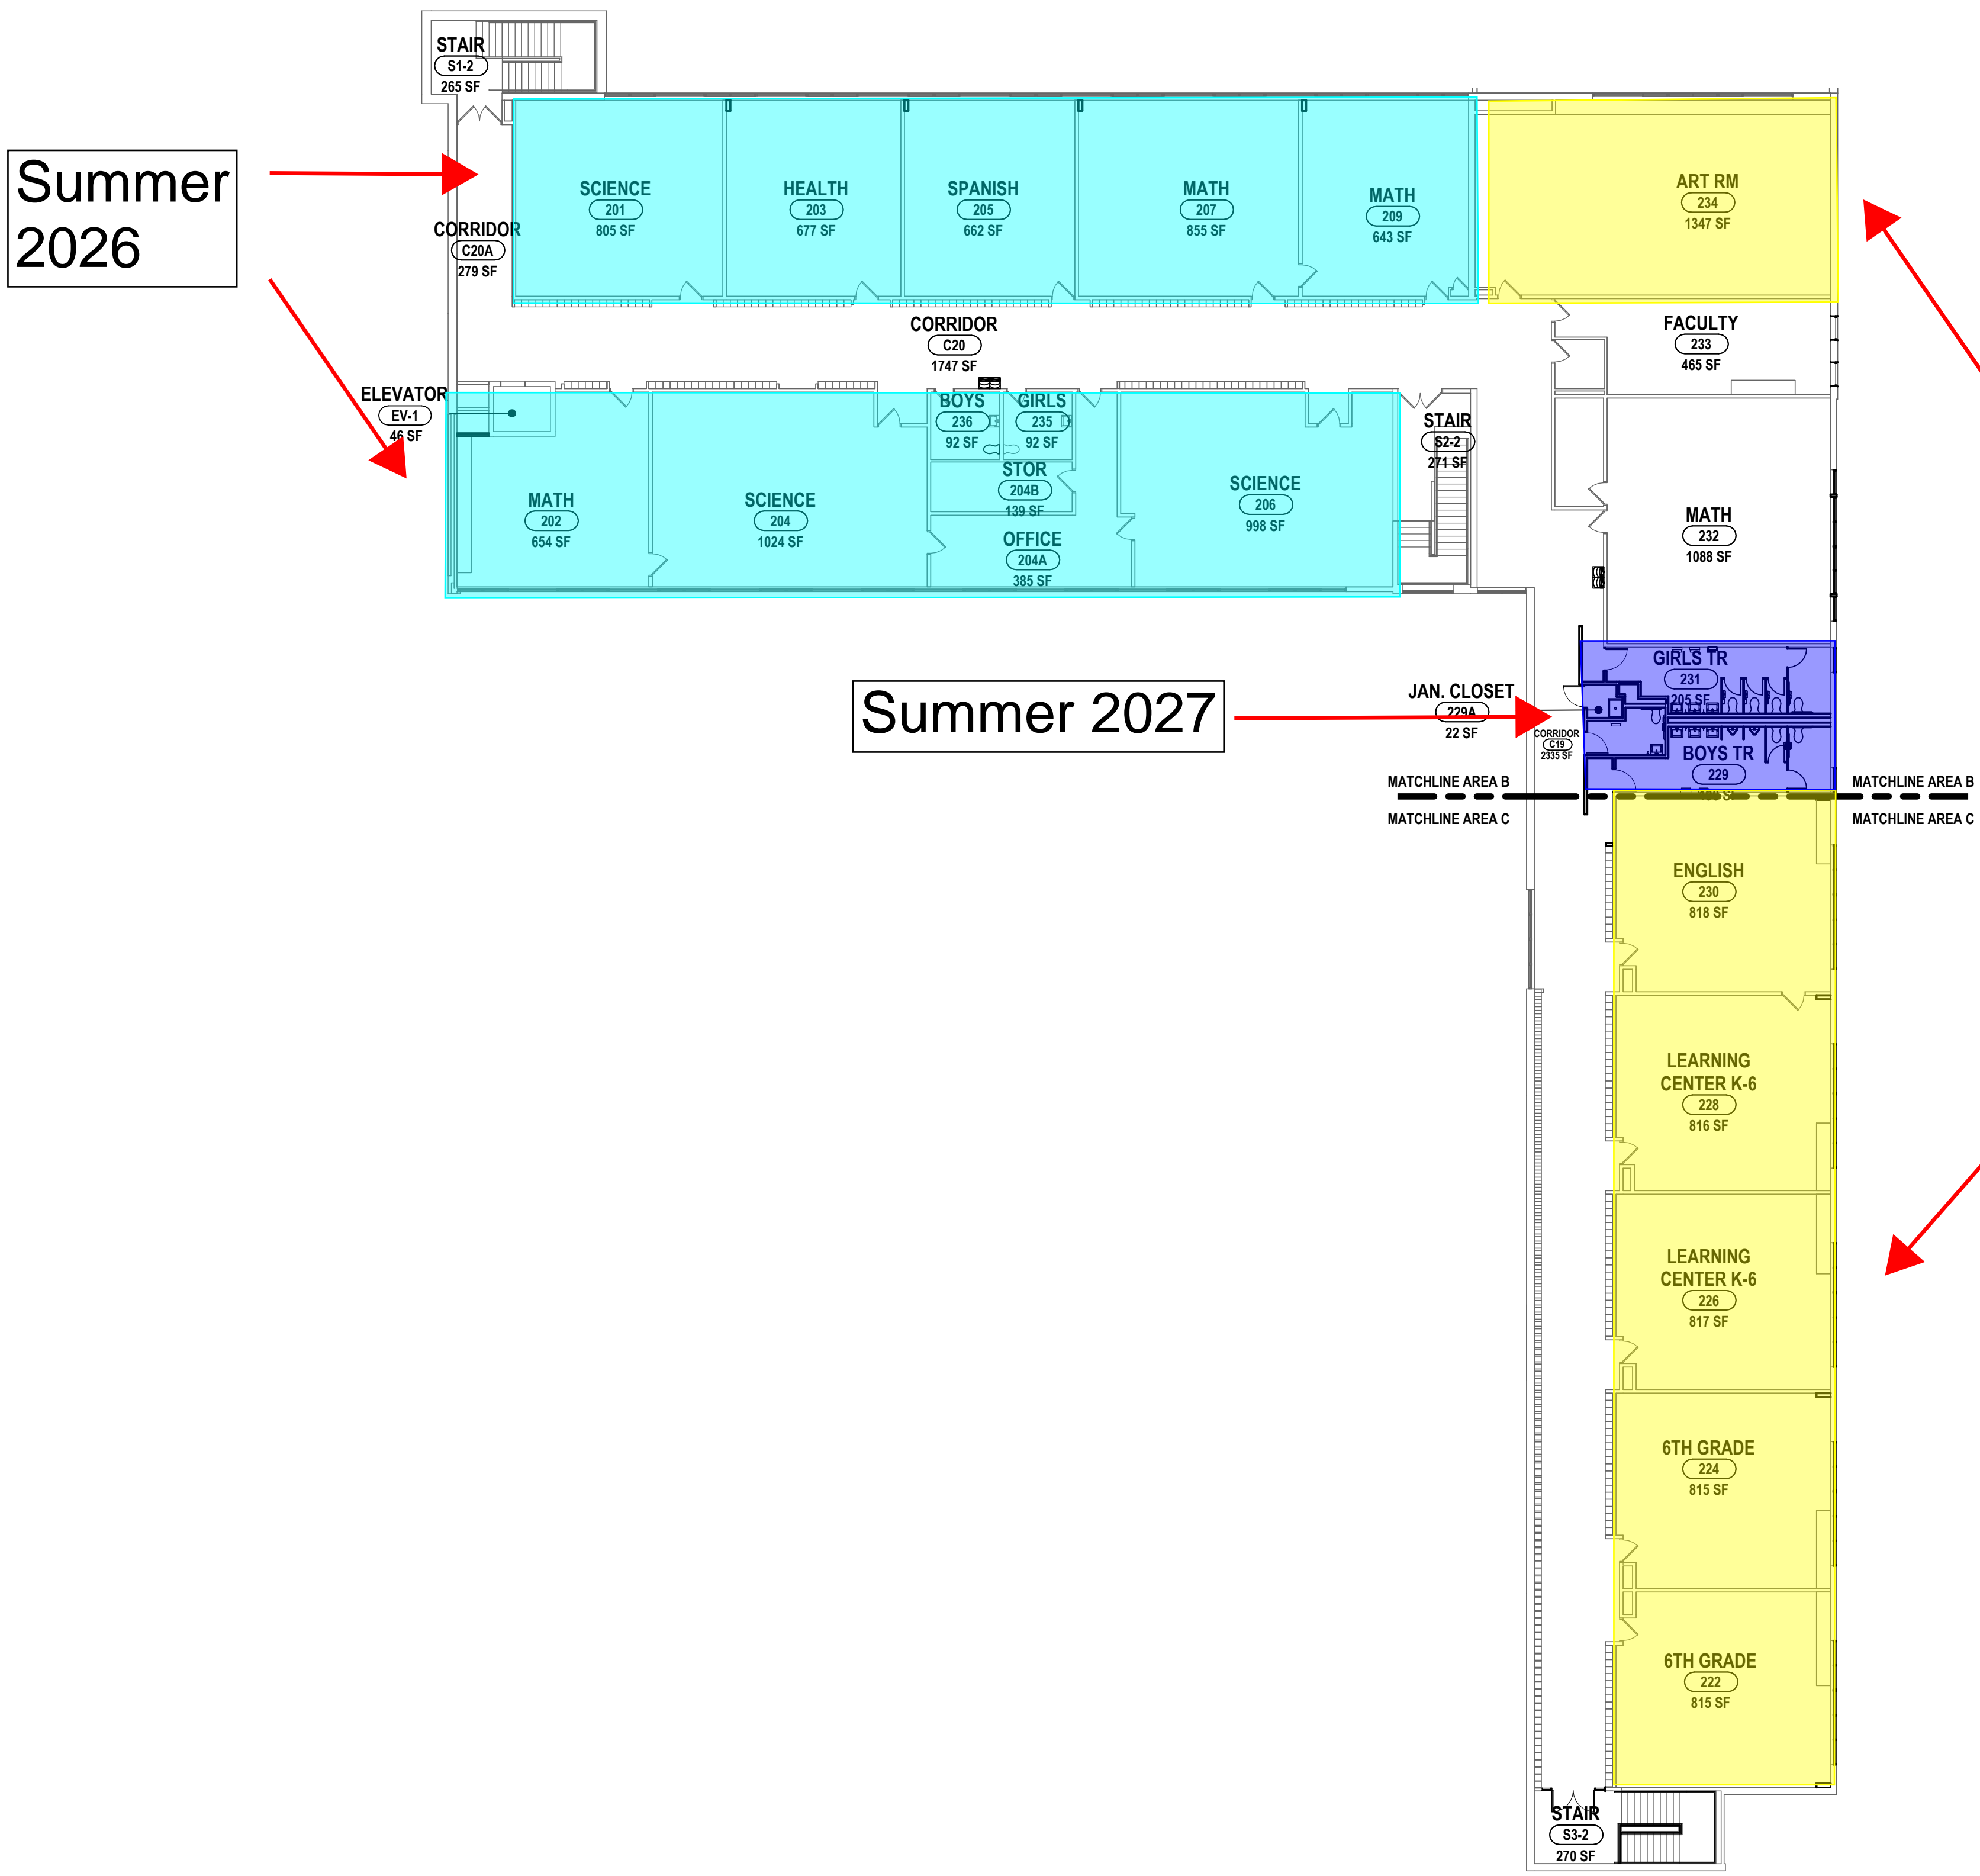


Summer 2026

Summer 2027

UV Replacements: Take over two rooms at a time, allowing two weeks per room. Coordinate the exact rooms with the owner. Staring Q1 2027

1 SECOND FLOOR KEY PLAN
1/16" = 1'-0"

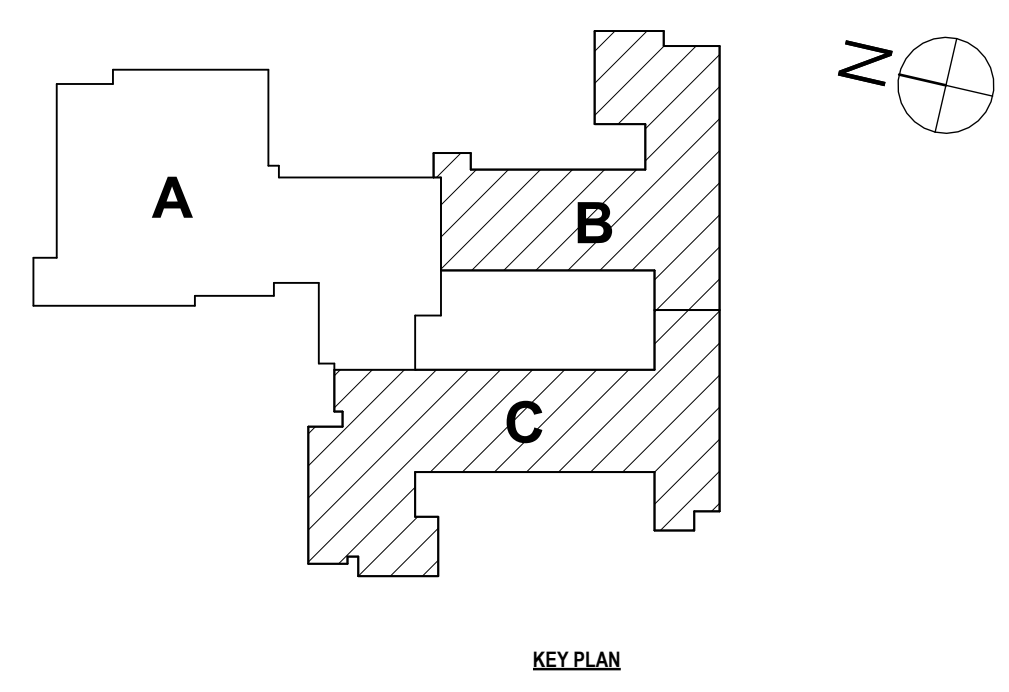

SED # MB-57-26-01-04-4-02-02-03-06 57-26-01-04-4-03-08

SECOND FLOOR KEY PLAN

2025 CAPITAL IMPROVEMENTS PROJECT
HAMMONDSPORT CENTRAL SCHOOL DISTRICT
8272 MAIN STREET HAMMONDSPORT, NEW YORK 14840

PROJECT NO: 1925.014

DRAWN BY:		KLC
CHECKED BY:		JZ
DATE:		10/27/2025
PHASE:		CD
#	DATE:	DESCRIPTION OF REVISION:

HUNT
ENGINEERS | ARCHITECTS | SURVEYORS
HORSEHEADS, NY 607-263-1000
ROCHESTER, NY 585-537-7668
BINGHAMTON, NY 607-798-8881
ALBANY, NY 518-788-4801
WWW.HUNTEAS.COM

NY CERTIFICATE NO. 001620 PA CERTIFICATE NO. TSC220313464-1

IT IS A VIOLATION OF THE LAW FOR ANY PERSON TO MAKE UNAUTHORIZED ALTERATIONS OR ADDITIONS TO PLANS DRAWN BY LICENSED ENGINEERS, ARCHITECTS OR SURVEYORS DATE: 10/27/2025

MB-A1.0B